D-Link
Building Networks for People

DEM-S2810LR

25GBase-LR Single-mode (10 km) SFP28 Transceiver

Трансивер SFP28 с 1 портом 25GBase-LR для одномодового оптического кабеля (до 10 км)

Quick Installation Guide

Краткое руководство по установке

Connecting the transceiver

Plug the DEM-S2810LR transceiver into the SFP28 port of your switch. Connect a fiber cable to the DEM-S2810LR transceiver in order to connect your switch to fiber media.

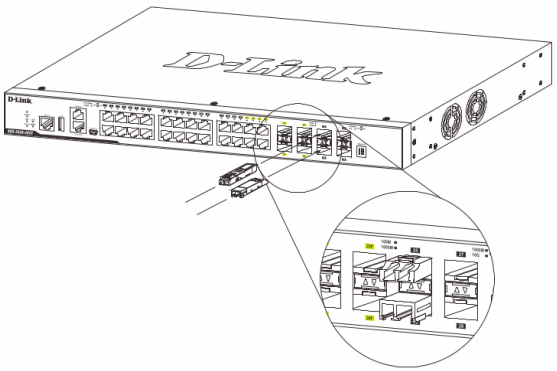

The DEM-S2810LR transceiver is hot pluggable. You can connect the transceiver while the system is powered on without causing any issues, and easily plug or unplug the transceiver without interrupting the network operation.

ENGLISH