


Overview

HPE ProLiant DL360 Gen10 Server

Does your data center need a secure, performance driven dense server that you can confidently deploy for virtualization, database, or high-performance computing? The HPE ProLiant DL360 Gen10 server delivers security, agility and flexibility without compromise.

The HPE ProLiant DL360 Gen10 Server supports the Intel® Xeon® Scalable Processor Family with up to 28 cores, plus 2933 MT/s HPE DDR4 Smart Memory supporting up to 3.0 TB max. With the added performance that HPE Persistent Memory and 10 NVMe bring, the HPE ProLiant DL360 Gen10 means business. Deploy this dense platform for diverse workloads in space constrained environments and maintain it with ease by automating the most essential server lifecycle management tasks with HPE OneView and HPE iLO 5.

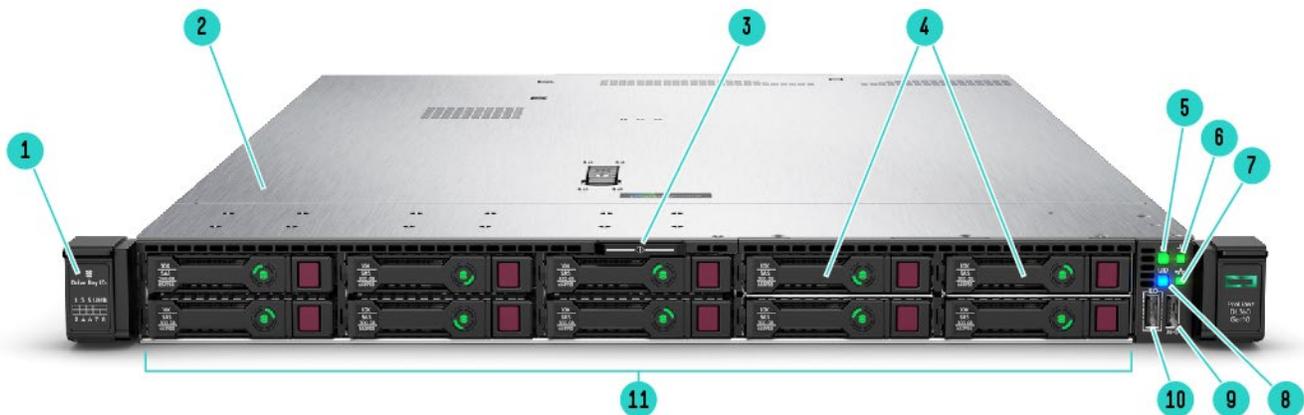


8 SFF Front View – 8 SFF + 2 SFF- Universal Media Bay option shown

- | | |
|--|---|
| 1. Drive support label | 5. Power On/Standby button and system power LED |
| 2. Quick removal access panel | 6. Health LED |
| 3. Serial no. label pull tab | 7. NIC status LED |
| 4. Universal Media Bay: +2 SFF SAS/SATA shown Option: +2 SFF NVMe drives Option: DVD-RW or DVD-ROM + Display port & USB 2.0 port Kit Option: +2 Dual uFF (4x M.2 cartridges) Option: Display port + USB 2.0 port Kit + Blank | 8. UID button/LED |
| | 9. USB 3.0 port |
| | 10. iLO Service Port |
| | 11. Standard 8 SAS/SATA drive bays |

Notes:

- Rear drive option allows for an additional + 1 SFF or +1 Dual uFF (2x M.2 cartridges).
- System Insight Display (SID) module will include #5-9 above (will not include #10 - iLO Service Port).

Overview

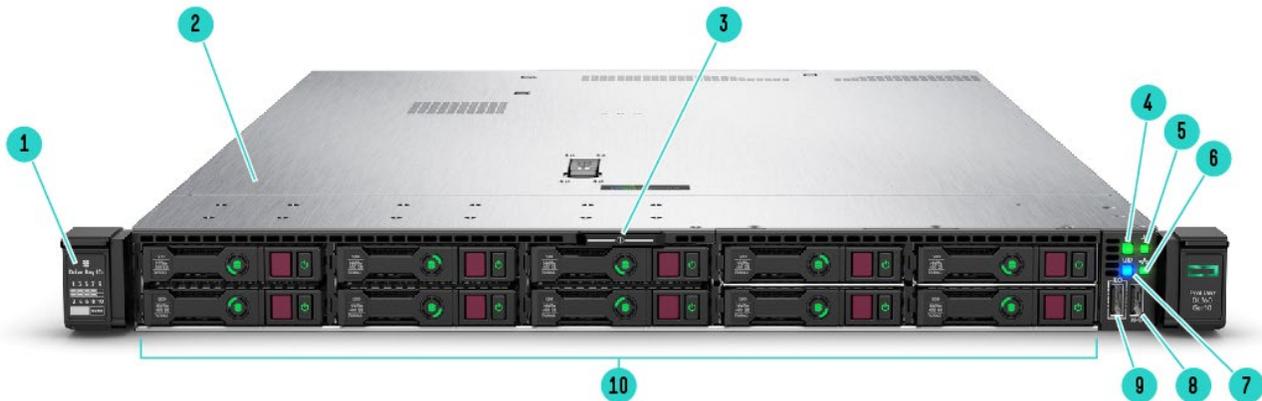


Premium 10SFF NVMe Front View

- | | |
|---|---|
| 1. Drive support label | 6. NIC status LED |
| 2. Quick removal access panel | 7. UID button/LED |
| 3. Serial no. label pull tab | 8. USB 3.0 port |
| 4. Power On/Standby button and system power LED | 9. iLO Service Port |
| 5. Health LED | 10. Max up to 10 NVMe drives (PCIe direct attached) or 8 SAS/SATA/NVMe + 2 NVMe |

Notes:

- Rear drive option allows for an additional + 1 SFF or +1 Dual uFF (2x M.2 cartridges).
- System Insight Display (SID) module will include #4-8 above (will not include #9 - iLO Service Port).
- Does not support the Xeon-Gold 6250L or Gold 6250 processors.

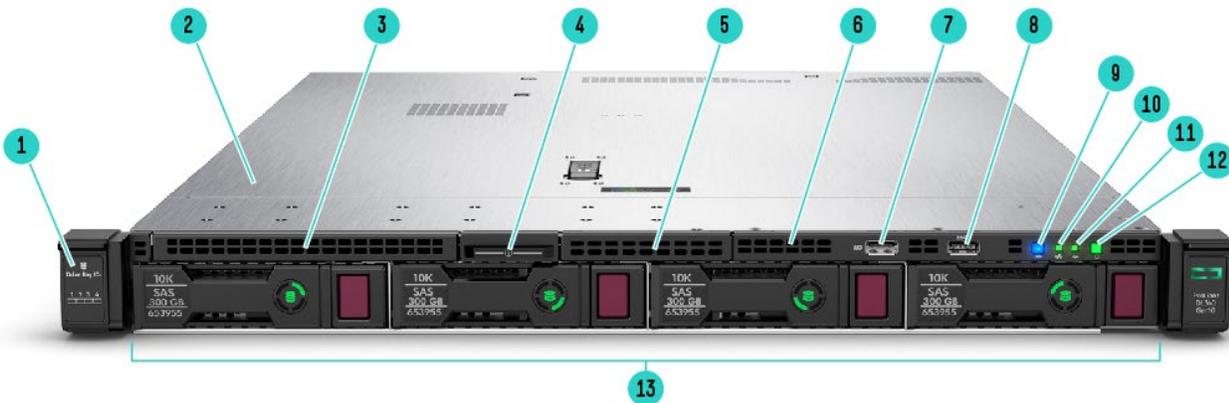

4 LFF Front View – Standard 4 LFF shown


- | | |
|---|--|
| 1. Drive support label | 8. USB 3.0 Port |
| 2. Quick removal access panel | 9. UID button/LED |
| 3. Option: DVD-RW or DVD-ROM (blank shown) | 10. Power On/Standby button and system power LED |
| 4. Serial no. label pull tab | 11. Health LED |
| 5. Option: Display port & USB 2.0 port Kit (blank shown) | 12. NIC status LED |
| 6. Option: System insight Display (SID) - standard shown ⁶ | 13. SAS/SATA drive bays |
| 7. iLO Service Port | |

Notes:

- ⁶ This option will lose #7 iLO Service Port.
- Rear drive option allows for additional + 1 SFF or +1 Dual uFF (2x M.2 cartridges), will lose one FH PCIe slot.



Overview

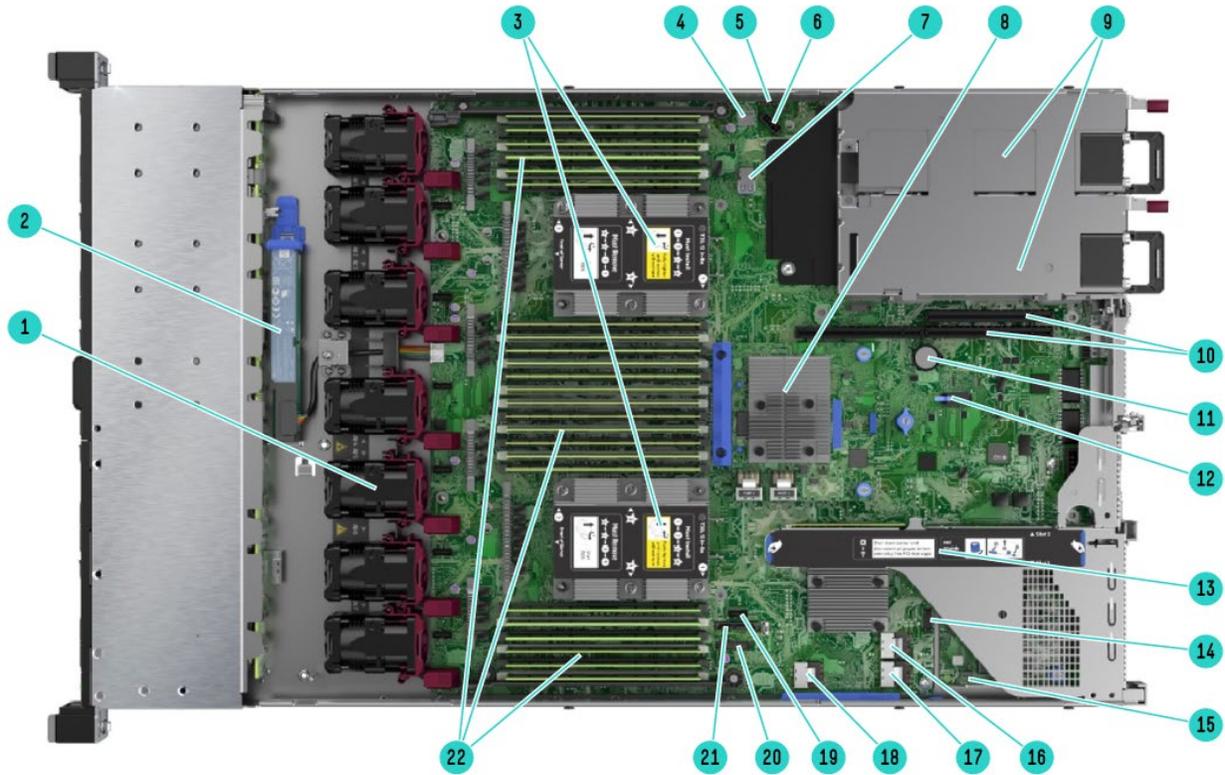


Internal View - Standard for all DL360 Gen10

- | | | | |
|-----|---|-----|--|
| 1. | For 8 SFF or 4 LFF - Standard single rotor hot plug fans ¹ 1 CPU – 5 standard fans 2 CPUs – 7 standard fans Option: High Performance fans | 13. | Primary (CPU1) PCIe 3.0 riser (Standard: GPU power connector + 1x 16 and 1x 8) Option: 2 SATA M.2 + 2x 16 Option: (8 SFF only): 2x 4 NVMe + 1x 16 and 1x 8 |
| 2. | Option: HPE Smart Hybrid Capacitor or HPE Smart Storage Battery | 14. | Option: Front Display port / USB 2.0 |
| 3. | Up to 2 processors (shown with standard heat sinks) | 15. | FlexibleLOM (supports various NICs up to 25GbE) |
| 4. | MicroSD card slot | 16. | x4 SATA port 1 |
| 5. | Option: Chassis Intrusion Detection | 17. | x4 SATA port 2 |
| 6. | Hard Drive backplane power connector | 18. | x2 SATA port 3 |
| 7. | Dual internal USB 3.0 connector | 19. | x1 SATA port 4 |
| 8. | Smart Array Controller (Type -a shown) | 20. | Front Power USB 3.0 connector |
| 9. | Up to 2 Power Supplies for redundant power | 21. | Optical/SATA port 5 |
| 10. | Secondary (CPU2) PCIe 3.0 riser Option: Full Height x16 (Lose slot 2 on Primary riser) ¹⁰ | 22. | DDR4 DIMM slots (Fully populated 24 DIMMs shown) |
| 11. | System Battery | | |
| 12. | Optional: TPM 2.0 | | |

Notes:

- ¹For 10 NVMe chassis - 7 High Performance fans
- ¹⁰For 10 NVMe chassis – Secondary Riser is not available due to 10 x4 NVMe riser for PCIe direct attached

Overview

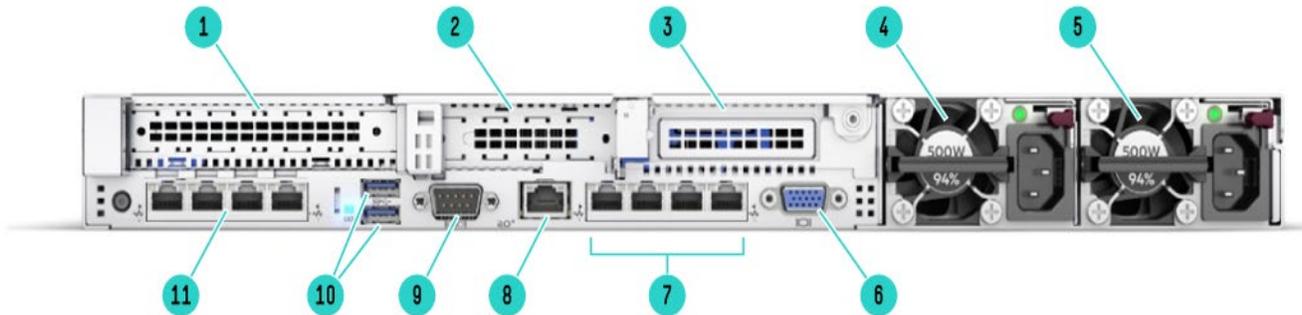

Rear View – Standard for all DL360 Gen10

- | | |
|---|--|
| 1. Slot 1 PCIe 3.0 Option: Rear Drive +1 SFF or 1 uFF SSD (2x M.2 cartridges) ¹ | 7. Embedded 4x 1GbE Adapter (if equipped) ⁷ |
| 2. Slot 2 PCIe 3.0 | 8. iLO Management Port |
| 3. Option: Slot 3 PCIe 3.0 (Requires 2 nd processor) | 9. Option: Serial Port |
| 4. Power Supply 2 | 10. USB 3.0 Ports |
| 5. Power Supply 1 | 11. Option: FlexibleLOM (Shown: 4x 1GbE) ¹¹ |
| 6. VGA port | |

Notes:

- ¹Will lose FH x16 PCIe slot1 with this option.
- ⁷ Network Choice (NC) models do not include embedded LOM. Customer choice of FlexibleLOM for networking capability.
- ¹¹Supports Various NICs up to 25GbE.

What's New

- BTO SKUs with Broadcom controller support

Platform Information

Form Factor

- 1U rack

Chassis Types

- 8 SFF with options supporting: +2 SFF or 2 NVMe or 2 Dual uFF (4x M.2 cartridges)
- 10 SFF NVMe Premium
- 4 LFF

Notes: Rear drive option available on all DL360 Gen10 chassis types for additional boot/storage: +1SFF or 1 Dual uFF (2x M.2 cartridges).

System Fans

Single rotor hot plug fans will be included

- **For 4 LFF and 8 SFF chassis:**
 - 1 CPU – Includes 5 standard fans
 - 2 CPUs – Includes 7 standard fans
- **For 10 NVMe Premium chassis:**
 - 2 CPUs – Includes 7 high performance fans as standard

Notes:

- Optional High Performance Fan Kit available (includes 7 fans).
- The DL360 Gen10 will support up to 7 fans with fan redundancy built in. One fan rotor failure will place server in degraded mode but fully functional. Two fan rotor failures could provide warning and imminent server shutdown.



Standard Features

Processors – Up to 2 of the following depending on model.

Notes:

- The 2nd digit of the processor model number “x1xx” and “x2xx” is used to denote the processor generation (i.e. 1=1st generation and 2=2nd generation)
- Field upgrades from 1st generation processors (x1xx) to 2nd generation processors (x2xx) not supported.
- “U” processors (i.e. 6212U) only supported in single socket configurations
- This table covers the public Intel offering only.
- For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

| Intel Xeon Processor | | |
|----------------------|----------------------|--|
| Processor Suffix | Description | Offering |
| L | Large memory tier | Up to 4.5 TB addressable memory per socket |
| M | Medium memory tier | Up to 2.0 TB addressable memory per socket |
| N | NFV Optimized | Targeted at Network Function Virtualization (NFV) workloads. Intel® SST-BF improves performance by directing base frequency to high priority/bottleneck cores, other workloads may see throttling. |
| R | Refresh | Improved price/performance over equivalent “non-R” 2 nd generation processors |
| S | Search Optimized | Optimized base frequency to address ‘search’ workloads, other workloads may see throttling. |
| U | 1 Socket Optimized | Focused on single socket (1P) configurations deliver performance at competitive price points. Does not support two socket (2P) arrangements. |
| V | VM Density Optimized | Fosters enhanced VM density, allowing to support more/larger virtual machines per host. |
| Y | Speed Select | Intel® SST-PP increases base frequency when fewer cores are enabled. Allows greater flexibility, deployment options and platform longevity. |

Notes: More than 1.5 TB memory per socket requires HPE Persistent Memory

| 2 nd Generation Intel® Xeon® Scalable Processor Family | | | | | | | |
|---|---------------|-------|----------|-------|---------------|-----------|-------------------|
| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | Memory per socket |
| Platinum 8280 Processor | 2.7 GHz | 28 | 38.50 MB | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8280L Processor | 2.7 GHz | 28 | 38.50 MB | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 4.5TB |
| Platinum 8280M Processor | 2.7 GHz | 28 | 38.50 MB | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 2TB |
| Platinum 8276 Processor | 2.2 GHz | 28 | 38.50 MB | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8276L Processor | 2.2 GHz | 28 | 38.50 MB | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 4.5TB |
| Platinum 8276M Processor | 2.2 GHz | 28 | 38.50 MB | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 2TB |
| Platinum 8270 Processor | 2.7 GHz | 26 | 35.75 MB | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8268 Processor | 2.9 GHz | 24 | 35.75 MB | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8260 Processor | 2.4 GHz | 24 | 35.75 MB | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8260L Processor | 2.4 GHz | 24 | 35.75 MB | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 4.5TB |
| Platinum 8260M Processor | 2.4 GHz | 24 | 35.75 MB | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 2TB |
| Platinum 8260Y Processor | 2.4 GHz | 24 | 35.75 MB | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| | 2.5 GHz | 20 | | | | | |
| | 2.7 GHz | 16 | | | | | |
| Platinum 8256 Processor | 3.8 GHz | 4 | 16.50 MB | 105W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Platinum 8253 Processor | 2.2 GHz | 16 | 22.00 MB | 125W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |

Notes:

- 6-Channel DDR4 @ 2933 MT/s.
- 6TB max RAM (larger than 2TB memory per socket on select SKUs)
- Support for: HPE Persistent Memory, Vector Neural Network Instructions (VNNI) for inference acceleration.
- 2 and 4 socket capable, 2S - 2UPI, 2S - 3UPI, 4S - 3UPI @ 10.4 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, advanced RAS



Standard Features

| 1st Generation Intel® Xeon® Scalable Processor Family | | | | | | | |
|---|---------------|-------|----------|-------|---------------|-----------|-------------------|
| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | Memory per socket |
| Platinum 8180M Processor | 2.5 GHz | 28 | 38.50 MB | 205W | 3 @ 10.4 GT/s | 2666 MT/s | 1.5TB |
| Platinum 8180 Processor | 2.5 GHz | 28 | 38.50 MB | 205W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8176 Processor | 2.1 GHz | 28 | 38.50 MB | 165W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8170 Processor | 2.1 GHz | 26 | 35.75 MB | 165W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8168 Processor | 2.7 GHz | 24 | 33.00 MB | 205W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8165 Processor | 2.3 GHz | 24 | 33.00 MB | 205W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8164 Processor | 2.0 GHz | 26 | 35.75 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8160M Processor | 2.1 GHz | 24 | 33.00 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 1.5TB |
| Platinum 8160 Processor | 2.1 GHz | 24 | 33.00 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8158 Processor | 3.0 GHz | 12 | 24.75 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8156 Processor | 3.6 GHz | 4 | 16.50 MB | 105W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Platinum 8153 Processor | 2.0 GHz | 16 | 22.00 MB | 125W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |

Notes:

- 6-Channel 1DPC DDR4 @ 2666 MT/s.
- 768 GB max memory capacity (1.5 TB on select skus)
- 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI, 8S - 3UPI @ 10.4 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, advanced RAS.

| 2nd Generation Intel® Xeon® Scalable Processor Family | | | | | | | |
|---|---------------|-------|----------|-------|---------------|-----------|-------------------|
| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | Memory per socket |
| Gold 6262V Processor | 1.9 GHz | 24 | 33.00 MB | 135W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6258R Processor | 2.7 GHz | 28 | 38.50 MB | 205W | 2 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6256 Processor | 3.6 GHz | 12 | 33.00 MB | 205W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6254 Processor | 3.1 GHz | 18 | 24.75 MB | 200W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6252 Processor | 2.1 GHz | 24 | 35.75 MB | 150W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6252N Processor | 2.3 GHz | 24 | 35.75MB | 150W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6250L Processor | 3.9 GHz | 8 | 35.75MB | 185W | 3 @ 10.4 GT/s | 2933 MT/s | 4.5TB |
| Gold 6250 Processor | 3.9 GHz | 8 | 35.75MB | 185W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6248R Processor | 3.0 GHz | 24 | 35.75 MB | 205W | 2 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6248 Processor | 2.5 GHz | 20 | 27.5 MB | 150W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6246R Processor | 3.4 GHz | 16 | 35.75 MB | 205W | 2 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6246 Processor | 3.3 GHz | 12 | 24.75 MB | 165W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6244 Processor | 3.6 GHz | 8 | 24.75 MB | 150W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6242R Processor | 3.1 GHz | 20 | 35.75 MB | 205W | 2 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6242 Processor | 2.8 GHz | 16 | 22 MB | 150W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6240R Processor | 2.4 GHz | 24 | 35.75 MB | 165W | 2 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6240 Processor | 2.6 GHz | 18 | 24.75 MB | 150W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6240Y Processor | 2.6 GHz | 18 | 24.75 MB | 150W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| | 2.8 GHz | 14 | | | | | |
| | 3.1 GHz | 8 | | | | | |
| Gold 6240L Processor | 2.6 GHz | 18 | 24.75 MB | 150W | 3 @ 10.4 GT/s | 2933 MT/s | 4.5TB |
| Gold 6240M Processor | 2.6 GHz | 18 | 24.75 MB | 150W | 3 @ 10.4 GT/s | 2933 MT/s | 2TB |
| Gold 6238R Processor | 2.2 GHz | 28 | 38.50 MB | 165W | 2 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6238 Processor | 2.1 GHz | 22 | 30.25 MB | 140W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6238L Processor | 2.1 GHz | 22 | 30.25 MB | 140W | 3 @ 10.4 GT/s | 2933 MT/s | 4.5TB |
| Gold 6238M Processor | 2.1 GHz | 22 | 30.25 MB | 140W | 3 @ 10.4 GT/s | 2933 MT/s | 2TB |
| Gold 6234 Processor | 3.3 GHz | 8 | 24.75 MB | 130W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |

Standard Features

| | | | | | | | |
|------------------------|---------|----|----------|------|---------------|-----------|-------|
| Gold 6230R Processor | 2.1 GHz | 26 | 35.75 MB | 150W | 2 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6230 Processor | 2.1 GHz | 20 | 27.5 MB | 125W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6230N Processor | 2.3 GHz | 20 | 27.50 MB | 125W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6226R Processor | 2.9 GHz | 16 | 22 MB | 150W | 2 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6226 Processor | 2.7 GHz | 12 | 19.25 MB | 125W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6222V Processor | 1.8 GHz | 20 | 27.50 MB | 115W | 3 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 6212U Processor | 2.4 GHz | 24 | 35.75 MB | 165W | N/A | 2933 MT/s | 1TB |
| Gold 6210U Processor | 2.5 GHz | 20 | 27.50 MB | 150W | N/A | 2933 MT/s | 1TB |
| Gold 6209U Processor | 2.1 GHz | 20 | 27.50 MB | 125W | N/A | 2933 MT/s | 1TB |
| Gold 6208U Processor | 2.9 GHz | 16 | 22 MB | 150W | N/A | 2933 MT/s | 1TB |
| Gold 5222 Processor | 3.8 GHz | 4 | 16.5 MB | 105W | 2 @ 10.4 GT/s | 2933 MT/s | 1TB |
| Gold 5220R Processor | 2.2 GHz | 24 | 35.75 MB | 150W | 2 @ 10.4 GT/s | 2666 MT/s | 1TB |
| Gold 5220 Processor | 2.2 GHz | 18 | 24.75 MB | 125W | 2 @ 10.4 GT/s | 2666 MT/s | 1TB |
| Gold 5220S Processor | 2.7 GHz | 18 | 24.75 MB | 125W | 2 @ 10.4 GT/s | 2666 MT/s | 1TB |
| Gold 5218R Processor | 2.1 GHz | 20 | 27.50 MB | 125W | 2 @ 10.4 GT/s | 2666 MT/s | 1TB |
| Gold 5218 Processor | 2.3 GHz | 16 | 22 MB | 125W | 2 @ 10.4 GT/s | 2666 MT/s | 1TB |
| Gold 5218N Processor * | 2.3 GHz | 16 | 22 MB | 110W | 2 @ 10.4 GT/s | 2666 MT/s | 1TB |
| Gold 5218B Processor * | 2.3 GHz | 16 | 22 MB | 125W | 2 @ 10.4 GT/s | 2666 MT/s | 1TB |
| Gold 5217 Processor | 3.0 GHz | 8 | 11 MB | 115W | 2 @ 10.4 GT/s | 2666 MT/s | 1TB |
| Gold 5215 Processor | 2.5 GHz | 10 | 13.75 MB | 85W | 2 @ 10.4 GT/s | 2666 MT/s | 1TB |
| Gold 5215L Processor | 2.5 GHz | 10 | 13.75 MB | 85W | 2 @ 10.4 GT/s | 2666 MT/s | 4.5TB |
| Gold 5215M Processor | 2.5 GHz | 10 | 13.75 MB | 85W | 2 @ 10.4 GT/s | 2666 MT/s | 2TB |

Notes:

- * 5218B has consistent features with the 5218 processor but from a different die. Mixing both 5218B & 5218 in a system is not supported
- 6-Channel DDR4 @ 2933 MT/s (Gold 6200 & 5222 skus only), 2666 MT/s on all Gold 5200 skus (except 5222 @ 2933 MT/s).
- 6TB max RAM (larger than 2TB memory per socket on select SKUs)
- Support for: HPE Persistent Memory, Vector Neural Network Instructions (VNNI) for inference acceleration.
- 2 and 4 socket capable, 2S - 2UPI, 2S - 3UPI, 4S - 3UPI @ 10.4 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, advanced RAS

1st Generation Intel® Xeon® Scalable Processor Family

| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | Memory per socket |
|----------------------|---------------|-------|----------|-------|---------------|-----------|-------------------|
| Gold 6154 Processor | 3.0 GHz | 18 | 24.75 MB | 200W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6152 Processor | 2.1 GHz | 22 | 30.25 MB | 140W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6150 Processor | 2.7 GHz | 18 | 24.75 MB | 165W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6148 Processor | 2.4 GHz | 20 | 27.50 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6146 Processor | 3.2 GHz | 12 | 24.75 MB | 165W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6144 Processor | 3.5 GHz | 8 | 24.75 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6143 Processor | 2.8 GHz | 16 | 22.00 MB | 205W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6142 Processor | 2.6 GHz | 16 | 22.00 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6140 Processor | 2.3 GHz | 18 | 24.75 MB | 140W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6138 Processor | 2.0 GHz | 20 | 27.50 MB | 125W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6136 Processor | 3.0 GHz | 12 | 24.75 MB | 150W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6134M Processor | 3.2 GHz | 8 | 24.75 MB | 130W | 3 @ 10.4 GT/s | 2666 MT/s | 1.5TB |
| Gold 6134 Processor | 3.2 GHz | 8 | 24.75 MB | 130W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6132 Processor | 2.6 GHz | 14 | 19.25 MB | 140W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6130 Processor | 2.1 GHz | 16 | 22.00 MB | 125W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 6128 Processor | 3.4 GHz | 6 | 19.25 MB | 115W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |

Standard Features

| | | | | | | | |
|---------------------|---------|----|----------|------|---------------|-----------|-------|
| Gold 6126 Processor | 2.6 GHz | 12 | 19.25 MB | 125W | 3 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 5122 Processor | 3.6 GHz | 4 | 16.50 MB | 105W | 2 @ 10.4 GT/s | 2666 MT/s | 768GB |
| Gold 5120 Processor | 2.2 GHz | 14 | 19.25 MB | 105W | 2 @ 10.4 GT/s | 2400 MT/s | 768GB |
| Gold 5118 Processor | 2.3 GHz | 12 | 16.50 MB | 105W | 2 @ 10.4 GT/s | 2400 MT/s | 768GB |
| Gold 5117 processor | 2.0GHz | 14 | 19.25 MB | 105W | 2 @ 10.4 GT/s | 2400 MT/s | 768GB |
| Gold 5115 Processor | 2.4 GHz | 10 | 13.75 MB | 85W | 2 @ 10.4 GT/s | 2400 MT/s | 768GB |

Notes:

- 6-Channel 1DPC DDR4 @ 2400 MT/s (SKU 5122 - supports 2666 MT/s).
- 768 GB max memory capacity (1.5 TB on select skus).
- 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI @ 10.4 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (1x 512-bit FMA) (SKU 5122 - supports 2x 512 bit FMA).
- 48 lanes PCIe 3.0, advanced RAS.

2nd Generation Intel® Xeon® Scalable Processor Family

| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | Memory per socket |
|------------------------|---------------|-------|----------|-------|--------------|-----------|-------------------|
| Silver 4216 Processor | 2.1 GHz | 16 | 22 MB | 100W | 2 @ 9.6 GT/s | 2400 MT/s | 1TB |
| Silver 4215R Processor | 3.2 GHz | 8 | 11 MB | 130W | 2 @ 9.6 GT/s | 2400 MT/s | 1TB |
| Silver 4215 Processor | 2.5 GHz | 8 | 11 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s | 1TB |
| Silver 4214R Processor | 2.4 GHz | 12 | 16.5 MB | 100W | 2 @ 9.6 GT/s | 2400 MT/s | 1TB |
| Silver 4214Y Processor | 2.2 GHz | 12 | 16.5 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s | 1TB |
| | 2.3 GHz | 10 | | | | | |
| | 2.4 GHz | 8 | | | | | |
| Silver 4214 Processor | 2.2 GHz | 12 | 16.5 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s | 1TB |
| Silver 4210R Processor | 2.4 GHz | 10 | 13.75 MB | 100W | 2 @ 9.6 GT/s | 2400 MT/s | 1TB |
| Silver 4210 Processor | 2.2 GHz | 10 | 13.75 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s | 1TB |
| Silver 4208 Processor | 2.1 GHz | 8 | 11 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s | 1TB |

Notes:

- 6-Channel DDR4 @ 2400 MT/s.
- 2TB max RAM
- Support for: HPE Persistent Memory (Silver 4215 and 4215R only), Intel® Vector Neural Network Instructions (VNNI) for inference acceleration.
- 2 and 4 socket capable, 2S - 2UPI, 2S - 3UPI, 4S - 3UPI @ 9.6 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, standard RAS

1st Generation Intel® Xeon® Scalable Processor Family

| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | Memory per socket |
|-----------------------|---------------|-------|----------|-------|--------------|-----------|-------------------|
| Silver 4116 Processor | 2.1 GHz | 12 | 16.50 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s | 768GB |
| Silver 4114 Processor | 2.2 GHz | 10 | 13.75 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s | 768GB |
| Silver 4112 Processor | 2.6 GHz | 4 | 8.25 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s | 768GB |
| Silver 4110 Processor | 2.1 GHz | 8 | 11.00 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s | 768GB |
| Silver 4108 Processor | 1.8 GHz | 8 | 11.00 MB | 85W | 2 @ 9.6 GT/s | 2400 MT/s | 768GB |

Notes:

- 6-Channel DDR4 @ 2400 MT/s, 768 GB max memory capacity.
- 2 socket capable, 2S - 2UPI @ 9.6 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (1x 512-bit FMA).
- 48 lanes PCIe 3.0, standard RAS.



Standard Features

2nd Generation Intel® Xeon® Scalable Processor Family

| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | Memory per socket |
|------------------------|---------------|-------|----------|-------|--------------|-----------|-------------------|
| Bronze 3204 Processor | 1.9 GHz | 6 | 8.25 MB | 85W | 2 @ 9.6 GT/s | 2133 MT/s | 1 TB |
| Bronze 3206R Processor | 1.9 GHz | 8 | 11 MB | 85W | 2 @ 9.6 GT/s | 2133 MT/s | 1 TB |

Notes:

- 6-Channel DDR4 @ 2133 MT/s.
- 2TB max RAM
- Support for: Intel® Vector Neural Network Instructions (VNNI) for inference acceleration..
- 2 and 4 socket capable, 2S - 2UPI, 2S - 3UPI, 4S - 3UPI @ 9.6 GT/s.
- Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, standard RAS

1st Generation Intel® Xeon® Scalable Processor Family

| Intel Xeon Models | CPU Frequency | Cores | L3 Cache | Power | UPI | DDR4 | Memory per socket |
|-----------------------|---------------|-------|----------|-------|--------------|-----------|-------------------|
| Bronze 3106 Processor | 1.7 GHz | 8 | 11.00 MB | 85W | 2 @ 9.6 GT/s | 2133 MT/s | 768GB |
| Bronze 3104 Processor | 1.7 GHz | 6 | 8.25 MB | 85W | 2 @ 9.6 GT/s | 2133 MT/s | 768GB |

Notes:

- 6-Channel DDR4 @ 2133 MT/s, 768 GB max memory capacity.
- 2 socket capable, 2S - 2UPI @ 9.6 GT/s.
- Intel AVX-512 (1x 512-bit FMA).
- 48 lanes PCIe 3.0, standard RAS.

Chipset

Intel C621 Chipset

Notes: For more information regarding Intel® chipsets, please see the following URL:

<https://www.intel.com/content/www/us/en/products/chipsets/server-chipsets.html>

System Management Chipset

HPE iLO 5 ASIC

Notes: Read and learn more in the [iLO QuickSpecs](#).

Memory

| Type | HPE DDR4 Smart Memory | Registered (RDIMM), Load Reduced (LRDIMM) |
|---|-----------------------|---|
| DIMM Slots Available | 24 | 12 DIMM slots per processor, 6 channels per processor, 2DIMMs per channel |
| Maximum capacity (LRDIMM) | 3.0 TB | 24 x 128 GB LRDIMM @ 2933 MT/s |
| Maximum capacity (RDIMM) | 1.54 TB | 24 x 64 GB RDIMM @ 2933 MT/s |
| Maximum capacity (HPE Persistent Memory) | 6.0 TB | 12 X 512 GB HPE Persistent Memory Kit @ 2666 MT/s |
| Maximum capacity (NVDIMM) | 192 GB | 12 x 16 GB NVDIMM @ 2666 MT/s |

Notes:

- NVDIMMs can only be mixed with RDIMMs.
- A maximum of 12 NVDIMMs supported with 1st generation Intel Xeon Scalable processors.
- HPE Persistent Memory only supported on 2nd generation Intel Xeon Scalable Processor series (Platinum 8200, Gold 6200, Gold 5200, Silver 4215 and 4215R)



Standard Features

- Maximum memory per socket is dependent on processor selection. 2nd generation processors supporting 2 TB or 4.5 TB per CPU are indicated by the “M” and “L” in the processor model names (i.e. 8276M and 8276L). 1st generation processors supporting 1.5 TB per CPU are indicated by the “M” in the processor model names (i.e. 8160M)
- Mixing of RDIMM and LRDIMM memory is not supported.
- For General Server Memory and Persistent Memory Population Rules and Guidelines for Gen10 see details here: <http://www.hpe.com/docs/memory-population-rules>

Memory Protection

Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

Online Spare

Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

Notes: For more information see our [Memory RAS feature technical whitepaper](#).

Expansion Slots

Primary GPU Riser

| Expansion Slots # | Technology | Bus Width | Connector Width | Processor | Slot Form Factor |
|-------------------|------------|-----------|-----------------|-----------|---------------------------------------|
| 1 | PCIe 3.0 | x16 | x16 | CPU1 | Full-height, 3/4 length (up to 9.5in) |
| 2 | PCIe 3.0 | x8 | x8 | CPU1 | Low Profile |

Primary SATA M.2 Riser

| Expansion Slots # | Technology | Bus Width | Connector Width | Processor | Slot Form Factor |
|-------------------|------------|-----------|-----------------|-----------|---------------------------------------|
| 1 | PCIe 3.0 | x16 | x16 | CPU 1 | Full-height; 3/4 length (up to 9.5in) |
| 2 | PCIe 3.0 | x16 | x16 | CPU 1 | Low Profile |

Primary NVMe Riser

| Expansion Slots # | Technology | Bus Width | Connector Width | Processor | Slot Form Factor |
|-------------------|------------|-----------|-----------------|-----------|--------------------------------------|
| 1 | PCIe 3.0 | x16 | x16 | CPU 1 | Full-height; 3/4 length (up to 9.5") |
| 2 | PCIe 3.0 | x8 | x8 | CPU 1 | Low Profile |

Secondary Riser*

| Expansion Slots # | Technology | Bus Width | Connector Width | Processor | Slot Form Factor |
|-------------------|------------|-----------|-----------------|-----------|---|
| 3 | PCIe 3.0 | x16 | x16 | CPU 2 | Low Profile or Full-height; 3/4 length (up to 9.5") |

Notes: If secondary full height kit is installed, then primary PCIe Slot #2 cannot be used. Only 2 full height slots are supported.

Internal Storage Devices

- **Optical Drive**
Available on 8 SFF and 4 LFF CTO Servers as an option (DVD-ROM or DVD-RW)
- **Hard Drives**
None ship standard



Standard Features

Storage Controllers

NVMe Boot Device

- HPE NS204i-p NVMe PCIe3 OS Boot Device

Software RAID

- HPE Smart Array S100i SR Gen10 SW RAID

Notes:

- All models come with the S100i Smart Array Controller with embedded software RAID support for up to 12 bays. The S100i uses 14 embedded SATA ports, but only 12 are available for bays as 2 are leveraged to support the M.2 connectors on the optional SATA M.2 capable primary riser (867978-B21).
- HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.
- HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled.
- The S100i supports Microsoft Windows Server only.
- For Linux users, HPE offers a solution that uses in-distro open-source software to create a two-disk RAID 1 boot volume. For more information visit: <https://downloads.linux.hpe.com/SDR/project/lrrib/>

Essential RAID Controllers

- HPE Smart Array E208i-a SR Gen10 Controller
- HPE Smart Array E208i-a SR G10 LH Controller
- HPE Smart Array E208i-p SR Gen10 Controller
- HPE Smart Array E208e-p SR Gen10 Controller

Performance RAID Controllers

- Broadcom MegaRAID MR416i-a Controller for HPE
- Broadcom MegaRAID MR416i-p Controller for HPE
- Broadcom MegaRAID MR216i-a Controller for HPE
- Broadcom MegaRAID MR216i-p Controller for HPE
- HPE Smart Array P408i-a SR Gen10 Controller
- HPE Smart Array P408i-a SR G10 LH Controller
- HPE Smart Array P408i-p SR Gen10 Controller
- HPE Smart Array P408e-p SR Gen10 Controller
- HPE Smart Array P816i-a SR Gen10 Controller
- HPE Smart Array P816i-a SR G10 LH Controller

Notes:

- If GPGPU is needed then the LH controller (low profile heatsink) should be ordered to allow GPU to fit in the chassis.
- For additional details, please see [HPE Smart Array SR Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers.](#)

Maximum Storage

| Storage | Capacity | Configuration |
|----------------------------|----------|---|
| Hot Plug SFF SAS HDD | 26.4 TB | 8+2+1 x 2.4 TB (with optional UMB + rear drive option) |
| Hot Plug SFF SATA HDD | 22 TB | 8+2+1 x 2.0 TB (with optional UMB + rear drive option) |
| Hot Plug SFF SAS SSD | 168.3 TB | 8+2+1 x 15.3 TB (with optional UMB + rear drive option) |
| Hot Plug SFF SATA SSD | 84.48 TB | 8+2+1 x 7.68 TB (with optional UMB + rear drive option) |
| Hot Plug SFF NVMe PCIe SSD | 153.6 TB | 10 x 15.36 TB NVMe |
| Hot Plug LFF SAS HDD | 72 TB | 4 x 18 TB |
| Hot Plug LFF SATA HDD | 72 TB | 4 x 18 TB |
| Hot Plug LFF SAS SSD | 7.68 TB | 4 x 1.92 TB |
| Hot Plug LFF SATA SSD | 7.68 TB | 4 x 1.92 TB |

Standard Features

Graphics

- Integrated video standard
- Video modes up to 1920 x 1200 @ 60 Hz (32 bpp)
- 16 MB Video Memory
- HPE iLO 5 on system management memory
- 32 MB Flash
- 4 Gbit DDR3 with ECC protection

Power Supply

- HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: Available in 94% efficiency.
- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 94% and 96% efficiency.
 - Also available in -48VDC and 227VAC/380VDC power inputs.
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes:
 - Available in 94% efficiency.
 - 1600W Power supplies only support high line voltage (200 VAC to 240 VAC).

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Flexible Slot power supplies](#).

Interfaces

| | |
|--------------------------------------|--|
| Serial | 1 port - Optional |
| Video | 1 Front - Display port (optional 8 SFF and 4 LFF only) 1 Rear - VGA port (standard on all chassis types) Notes: Both ports are not active simultaneously. |
| Network Ports | 4x 1GbE embedded NIC (if equipped/depending on model) 1 FlexibleLOM slot available on all chassis types (supporting various NICs adapters) |
| iLO Remote Mgmt Port | 1 Gb Dedicated |
| MicroSD Slot | 1 MicroSD slot Notes: The MicroSD slot is not hot-pluggable, server must be powered down before removal. |
| USB 3.0 | Up to 5 total: 1 front, 2 rear, 2 internal (standard on all chassis types) +1 optional USB 2.0 front (on 8 SFF and 4 LFF only) |
| SID (Systems Insight Display) | Optional for all chassis types Notes: Will lose iLO Service Port if selecting this option. |



Standard Features

Operating Systems and Virtualization Software

2nd Generation Intel® Xeon® Scalable Processor Family

- **Windows Server 2022:** Essentials, Standard, Datacenter
- **Windows Server 2019:** Essentials, Standard, Datacenter
- **Windows Server 2016:** Essentials, Standard, Datacenter
- **Windows Server 2012 R2:** Essentials, Standard, Datacenter
Notes: Windows Server 2012 R2 is not supported for Broadcom MR controllers.
- Microsoft Hyper-V Server: 2012 R2, 2016 & 2019
- VMware vSphere: 6.0 U3, 6.5 U2 through U.3 & 6.7 U1 through U3, 7.0
Notes: 6.5 U3, 6.7 U3 & 7.0 minimums for Xeon "R", Gold 6256, Gold 6250L & Gold 6250 processors.
- ClearOS: 7.6; ClearVM: 2.0
- **Red Hat Enterprise Linux (RHEL):** 7.6 w/ Kbase **, 8.0
- **SUSE Linux Enterprise Server (SLES):** 12 SP3, 15 (includes Xen) **
Notes: SLES12 SP4 is the minimum for servers featuring Intel® Optane™ DC Persistent Memory.
- Ubuntu: 18.04 LTS (4.15.0)
- Oracle Linux: Oracle Linux 7.6 UEK Release 5 Update 2; Oracle VM 3.4.6 (UEK Release 4 Update 7)
- Citrix: Hypervisor: 8.0, 8.1, 8.2; XenServer 7.1, 7.4, 7.5, 7.6

1st Generation Intel® Xeon® Scalable Processor Family

- **Windows Server 2019:** Essentials, Standard & Datacenter
- **Windows Server 2016:** Essentials, Standard & Datacenter
- **Windows Server 2012 R2:** Essentials, Standard & Datacenter
Notes: Windows Server 2012 R2 is not supported for Broadcom MR controllers.
- Microsoft Hyper-V Server: 2012 R2, 2016 & 2019
- VMware vSphere: 6.0 U3, 6.5 through U.3 & 6.7 through U3, 7.0
- ClearOS: 7.6; ClearVM: 2.0
- **Red Hat Enterprise Linux (RHEL):** 6.9 & 7.3**
- **SUSE Linux Enterprise Server (SLES):** 11 SP4, 12 SP2 & 15 (includes Xen) **
- Ubuntu: 16.04.3 HWE (4.10), 18.04 LTS (4.15.0)
- Oracle Linux: Oracle Linux/UEK 6.9, 7.4; Oracle VM 3.4.4
- Citrix: Hypervisor: 8.0, 8.1, 8.2; XenServer 7.1, 7.4, 7.5, 7.6
- **ClearOS**
Notes: ClearOS allows you to build a fully functional server that is just right for you at no upfront cost. For more information on ClearOS, please visit <http://www.hpe.com/servers/clearos>.
- CentOS

Notes:

- For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server. <http://www.hpe.com/info/ossupport>
- **64-bit only; includes KVM

Industry Standard Compliance

- ACPI 6.1 Compliant
- PCIe 3.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 3.0 Compliant
- USB 2.0 Compliant (only on optional Universal Media Bay)



Standard Features

- SMBIOS 3.1
- UEFI 2.6 (Unified Extensible Firmware Interface Forum)
- Redfish API
- IPMI 2.0
- Secure Digital 4.0
- TPM 1.2 and 2.0 support
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line (SMASH CLP)
- Active Directory v1.0
- ASHRAE A3/A4
- Energy Star
- European Union Erp Lot 9

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot 9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more/erp-lot9-servers.html>

Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.

HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

Notes: For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>.

HPE Server UEFI/Legacy ROM

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Operating system specific functionality
- Support for > 2.2 TB (using GPT) boot drives
- USB 3.0 Stack
- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload Profiles for simple performance optimization



Standard Features

UEFI Boot Mode only:

- TPM 2.0 Support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled.
- iSCSI Software Inhhhor Support.
- HTTP/HTTPs Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

Notes:

- For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.
- UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Server.

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <http://www.hpe.com/info/ilo>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at <http://www.hpe.com/servers/uefi>.

Intelligent Provisioning

Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning. Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

Server Utilities

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at <https://www.hpe.com/us/en/servers/smart-update.html>.

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities. Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.



Standard Features

HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell.

Learn more at <http://www.hpe.com/servers/powershell>.

HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.hpe.com/info/oneview>.

HPE Systems Insight Manager (HPE SIM)

Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/info/hpesim>.

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<https://www.hpe.com/us/en/search-results.html?page=1&q=servers%20warranty&autocomplete=0> .

Security

- HPE Trusted Supply Chain
- UEFI Secure Boot and Secure Start support
- Immutable Silicon Root of Trust
- FIPS 140-2 validation
- Common Criteria certification
- Configurable for PCI DSS compliance
- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Support for Commercial National Security Algorithms (CNSA)
- iLO Security Modes
- Granular control over iLO interfaces
- Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
- Tamper-free updates – components digitally signed and verified



Standard Features

- Secure Recovery – recover critical firmware to known good state on detection of compromised FW
 - Ability to rollback firmware
 - Secure erase of NAND
 - TPM (Trusted Platform Module) 1.2 option
 - TPM (Trusted Platform Module) 2.0 option
 - Bezel Locking Kit
 - Chassis Intrusion detection option
-



Optional Features

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE GreenLake for Compute Ops Management

HPE is intelligently transforming compute management with an intuitive cloud operating experience through HPE GreenLake cloud platform to streamline and secure operations from edge-to-cloud. Automated key lifecycle tasks, for onboarding, updating, managing, and monitoring HPE servers, brings agility and greater efficiencies to wherever compute devices reside via a unified single browser-based interface. Manage single locations or multiple, distributed sites. Keep tens to thousands of servers secure with batch policy controls and automated updates.

Compute Ops Management is cloud-native software that is continually updated with new services, features, patches, and fixes. The management application resides in the HPE GreenLake cloud platform (access via <https://console.greenlake.hpe.com>) and leverages the HPE GreenLake architecture, security, and unified operations.

For a complete list of software as-a-service subscription SKUs and more information, visit the HPE GreenLake for Compute Ops Management QuickSpecs: <https://www.hpe.com/psnow/doc/a50004263enw>

For information on supported HPE servers, the complete list can be found here: <https://www.hpe.com/info/com-supported-servers>

HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>.

HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

Accelerator and GPGPU Information

Hewlett Packard Enterprise supports various accelerators on select HPE ProLiant servers to support different workloads. The accelerators enable seamless integration of GPU computing with HPE ProLiant servers for high-performance computing, large data center graphics, deep learning and virtual desktop deployments. These accelerators deliver all of the standard benefits of GPU computing while enabling maximum reliability and tight integration with system monitoring and management tools such as HPE Insight Cluster Management Utility.



Optional Features

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>



Service and Support

HPE Pointnext - Service and Support

Get the most from your HPE Products. Get the expertise you need at every step of your IT journey with **HPE Pointnext Services**. We help you lower your risks and overall costs using automation and methodologies that have been tested and refined by HPE experts through thousands of deployments globally. HPE Pointnext **Advisory Services** focus on your business outcomes and goals, partnering with you to design your transformation and build a roadmap tuned to your unique challenges. Our **Professional** and **Operational Services** can be leveraged to speed up time-to-production, boost performance and accelerate your business. HPE Pointnext specializes in flawless and on-time implementation, on-budget execution, and creative configurations that get the most out of software and hardware alike.

Consume IT on your terms

HPE GreenLake brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

Managed services to run your IT operations

HPE GreenLake Management Services provides services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

Recommended Services

HPE Pointnext Tech Care.

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimagined from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2 hour response time. Essential which provides a 15 minute response time 24x7 for most enterprise level customers, and Critical which includes a 6 hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

HPE Pointnext Complete Care

HPE Pointnext Complete Care is a modular, edge-to-cloud IT environment service that provides a holistic approach to optimizing your entire IT environment and achieving agreed upon IT outcomes and business goals through a personalized and customer-centric experience. All delivered by an assigned team of HPE Pointnext Services experts. HPE Pointnext Complete Care provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/complecare>



Service and Support

Other related Services

HPE Server Hardware Installation

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://h20195.www2.hpe.com/v2/Getdocument.aspx?docname=5981-9356enw>

HPE Installation and Startup Service

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

DC for Hyperscale

Complete Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

HPE Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

HPE Service Credits

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.



Service and Support

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with HPE experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>.

The HPE Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

Notes: *HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.

Notes: HPE ProLiant DL385 Gen10 Plus Server is covered under the HPE Service Contract applied to the HPE ProLiant Server. No separate HPE support services need to be purchased.

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [here](#).



Pre-Configured Models

- Pre-Configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
- Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
- If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

European Union Erp Lot 9 Regulation

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot 9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more/erp-lot9-servers.html>

Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.

HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

Pre-Configured Models

Network Choice models do not include embedded LOM. Some models include embedded LOM.

| Powered by 2 nd Generation Intel Xeon Processors | | | |
|---|--|---|---|
| Models | | | |
| SKU Number | P56955-B21 P56955-291 P56955-421 | P56956-B21 P56956-291 P56956-421 | P56957-B21 P56957-291 P56957-421 |
| Model Name | HPE ProLiant DL360 Gen10 4208 2.10GHz 8-core 1P 32GB-R MR416i-a 8SFF BC 80W PS Server | HPE ProLiant DL360 Gen10 4210R 2.40GHz 10-core 1P 32GB-R MR416i-a 8SFF BC 800W PS Server | HPE ProLiant DL360 Gen10 4215R 3.20GHz 8-core 1P 32GB-R MR416i-a NC 8SFF BC 800W PS Server |
| Chassis | HPE DL360 Gen10 8SFF BC CTO Svr (P56950-B21) | HPE DL360 Gen10 8SFF BC CTO Svr (P56950-B21) | HPE DL360 Gen10 NC 8SFF BC CTO Svr (P56949-B21) |
| Processor | 4208 (8-Core, 2.1 GHz, 85W) | 4210R (10-Core, 2.4 GHz, 100W) | 4215R (8-Core, 3.2 GHz, 130W) |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink | One processor with standard heatsink |
| Memory | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) |
| Network Controller | 1 Embedded 4 x 1GbE Ethernet Adapter | 1 Embedded 4 x 1GbE Ethernet Adapter | HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter Notes: No embedded networking |
| Storage Controller | MR416i-a/4GB with Smart Storage Battery | MR416i-a/4GB with Smart Storage Battery | MR416i-a/4GB with Smart Storage Battery |
| Hard Drive | None included Supports only SAS/SATA Basic Carrier drives. Does not support | None included Supports only SAS/SATA Basic Carrier drives. Does not support | None included Supports only SAS/SATA Basic Carrier drives. Does not support |

Pre-Configured Models

| | | | |
|----------------------|--|--|--|
| | Smart Carrier drives or NVMe drives. | Smart Carrier drives or NVMe drives. | Smart Carrier drives or NVMe drives. |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| SKU Number | P56955-B21 P56955-291 P56955-421 | P56956-B21 P56956-291 P56956-421 | P56957-B21 P56957-291 P56957-421 |
| Power Supply | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (-B21 & -291) ----- 1x HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (-421) | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (-B21 & -291) ----- 1x HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (-421) | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (-B21 & -291) ----- 1x HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (-421) |
| Fans | 5 - Standard | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Energy Star | Energy Star 3.0 | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Powered by 2nd Generation Intel Xeon Processors

| Models | | | |
|-----------------------------|---|--|--|
| SKU Number | P56951-B21 P56951-291 P56951-421 | P56952-B21 P56952-291 P56952-421 | P56953-B21 P56953-291 P56953-421 |
| Model Name | HPE ProLiant DL360 Gen10 4214R 2.4GHz 12-core 1P 32GB-R MR416i-a 8SFF BC 800W PS Server | HPE ProLiant DL360 Gen10 5218R 2.1GHz 20-core 1P 32GB-R MR416i-a NC 8SFF BC 800W PS Server | HPE ProLiant DL360 Gen10 6226R 2.9GHz 16-core 1P 32GB-R MR416i-a NC 8SFF BC 800W PS Server |
| Chassis | HPE DL360 Gen10 8SFF BC CTO Svr (P56950-B21) | HPE DL360 Gen10 NC 8SFF BC CTO Svr (P56949-B21) | HPE DL360 Gen10 NC 8SFF BC CTO Svr (P56949-B21) |
| Processor | 4214R (12-Core, 2.4 GHz, 100W) | 5218R (20-Core, 2.1 GHz, 125W) | 6226R (16-Core, 2.9 GHz, 150W) |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink | One processor with standard heatsink |
| Memory | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) |
| Network Controller | 1 Embedded 4 x 1GbE Ethernet Adapter | HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter Notes: No embedded networking | HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter Notes: No embedded networking |
| Storage Controller | MR416i-a/4GB with Smart Storage Battery | MR416i-a/4GB with Smart Storage Battery | MR416i-a/4GB with Smart Storage Battery |
| Hard Drive | None included | None included | None included |

Pre-Configured Models

| | | | |
|----------------------|--|--|--|
| | Supports only SAS/SATA Basic Carrier drives. Does not support Smart Carrier drives or NVMe drives. | Supports only SAS/SATA Basic Carrier drives. Does not support Smart Carrier drives or NVMe drives. | Supports only SAS/SATA Basic Carrier drives. Does not support Smart Carrier drives or NVMe drives. |
| SKU Number | P56951-B21 P56951-291 P56951-421 | P56952-B21 P56952-291 P56952-421 | P56953-B21 P56953-291 P56953-421 |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (-B21 & -291) ----- 1x HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (-421) | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (-B21 & -291) ----- 1x HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (-421) | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (-B21 & -291) ----- 1x HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (-421) |
| Fans | 5 - Standard | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Energy Star | Energy Star 3.0 | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Powered by 2nd Generation Intel Xeon Processors

| Models | | |
|-----------------------------|--|--|
| SKU Number | P56958-B21 P56958-291 P56958-421 | P56954-B21 P56954-291 P56954-421 |
| Model Name | HPE ProLiant DL360 Gen10 5218 2.30GHz 16-core 1P 32GB-R MR416i-a NC 8SFF BC 800W PS Server | HPE ProLiant DL360 Gen10 6248R 3.0GHz 24-core 1P 32GB-R MR416i-a NC 8SFF BC 800W PS Server |
| Chassis | HPE DL360 Gen10 NC 8SFF BC CTO Svr (P56949-B21) | HPE DL360 Gen10 NC 8SFF BC CTO Svr (P56949-B21) |
| Processor | 5218 (16-Core, 2.3 GHz, 125W) | 6248R (24-Core, 3.0 GHz, 205W) |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink |
| Memory | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) |
| Network Controller | HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter Notes: No embedded networking | HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter Notes: No embedded networking |
| Storage Controller | MR416i-a/4GB with Smart Storage Battery | MR416i-a/4GB with Smart Storage Battery |
| Hard Drive | None included | None included |

Pre-Configured Models

| | | |
|--|--|--|
| | Supports only SAS/SATA Basic Carrier drives. Does not support Smart Carrier drives or NVMe drives. | Supports only SAS/SATA Basic Carrier drives. Does not support Smart Carrier drives or NVMe drives. |
|--|--|--|

| | | |
|----------------------|--|--|
| SKU Number | P56958-B21 P56958-291 P56958-421 | P56954-B21 P56954-291 P56954-421 |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (-B21 & -291) ----- 1x HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (-421) | 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit (-B21 & -291) ----- 1x HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit (-421) |
| Fans | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | |
| Energy Star | Energy Star 3.0 | |
| Form Factor | 1U Rack | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | |

Notes: UEFI is the standard default for all Pre-configured models.

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC
- 421 = EMEA

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

Powered by 2nd Generation Intel Xeon Processors

Network Choice Models

| | | | |
|-----------------------------|--|--|--|
| SKU Number | P50750-B21 P50750-291 | P40637-B21 P40637-291 | P23578-B21 P23578-291 P23578-AA1 |
| Model Name | HPE ProLiant DL360 Gen10 4210R 2.4GHz 10-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 4210R 2.4GHz 10-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 4210R 2.4GHz 10-core 1P 16GB-R P408i-a NC 8SFF 500W PS Server |
| Chassis | 8SFF | 8SFF | 8SFF |
| Processor | 4210R (10-Core, 2.4 GHz, 100W) | 4210R (10-Core, 2.4 GHz, 100W) | 4210R (10-Core, 2.4 GHz, 100W) |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink | One processor with standard heatsink |

Pre-Configured Models

| | | | |
|---------------|---|---|---|
| Memory | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2400 MT/s due to processor limitation. | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2400 MT/s due to processor limitation. | 16 GB RDIMM 2R 2933 MT/s (1x 16 GB) Notes: Runs at 2400 MT/s due to processor limitation. |
|---------------|---|---|---|

| | | | |
|---------------------------|--|--|---|
| SKU Number | P50750-B21 P50750-291 | P40637-B21 P40637-291 | P23578-B21 P23578-291 P23578-AA1 |
| Network Controller | P50750-B21 / -291 Embedded 4x1GbE Ethernet | P40637-B21 / -291 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking | P23578-B21 / -291 / -AA1 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery |
| Hard Drive | None included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x 800W | 1x 800W | 1x 500W |
| Fans | 5 - Standard | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Energy Star | Energy Star 3.0 | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes: UEFI is the standard default for all Pre-configured models.

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.



Pre-Configured Models

| Powered by 2 nd Generation Intel Xeon Processors | | | |
|---|--|--|--|
| Network Choice Models | | | |
| SKU Number | P23579-B21 P23579-291 P23579-AA1 | P40638-B21 P40638-291 | P23577-B21 / P40409-B21 P23577-291 / P40409-291 |
| Model Name | HPE ProLiant DL360 Gen10 4214R 2.4GHz 12-core 1P 32GB-R P408i-a NC 8SFF 500W PS Server | HPE ProLiant DL360 Gen10 4215R 3.2GHz 8-core 1P 32GB- R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 4215R 3.2GHz 8-core 1P 32GB-R S100i NC 8SFF 800W PS Server |
| Chassis | 8SFF | 8SFF | 8SFF |
| Processor | 4214R (12-Core, 2.4 GHz, 100W) | 4215R (8-Core, 3.2 GHz, 130W) | 4215R (8-Core, 3.2 GHz, 130W) |
| Number of Processors | One processor with standard heatsink | One processor with High Performance heatsink | One processor with High Performance heatsink |
| Memory | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2400 MT/s due to processor limitation. | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2400 MT/s due to processor limitation. | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2400 MT/s due to processor limitation. |
| Network Controller | P23579-B21 / -291 / -AA1 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking | P40638-B21 / -291 HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter Notes: No embedded networking | P23577-B21 / -291 HPE Ethernet 10Gb 2-port FLR-T X550-AT2 (HPE Ethernet 10 GbE 2P 562FLR-T) Notes: No embedded networking P40409-B21 / -291 HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery | Embedded 14-port S100i Notes: SATA only. |
| Hard Drive | Not included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | None included (Optical Drive options available) | None included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | - 1x 500W | 1x 800W | 1x 800W |
| Fans | 5 - Standard | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Energy Star | Energy Star 3.0 | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes: UEFI is the standard default for all Pre-configured models.

Pre-Configured Models

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

| Powered by 2 nd Generation Intel Xeon Processors | | | |
|---|---|--|---|
| Network Choice Models | | | |
| SKU Number | P36183-B21 P36183-291 | P24740-B21 / P40408-B21 P24740-291 / P40408-291 | P24741-B21 / P40407-B21 P24741-291 / P40407-291 |
| Model Name | HPE ProLiant DL360 Gen10 5218R 2.1GHz 20-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 5218R 2.1GHz 20-core 1P 32GB-R S100i NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 5220R 2.2GHz 24-core 1P 32GB-R S100i NC 8SFF 800W PS Server |
| Chassis | 8SFF | 8SFF | 8SFF |
| Processor | 5218R (20-Core, 2.1 GHz, 125W) | 5218R (20-Core, 2.1 GHz, 125W) | 5220R (24 core, 2.2 GHz, 150W) |
| Number of Processors | One processor with standard heatsink | One processor with standard heatsink | One processor with High Performance heatsink |
| Memory | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2666 MT/s due to processor limitation. | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2666 MT/s due to processor limitation. | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2666 MT/s due to processor limitation. |
| Network Controller | P36183-B21 / -291 HPE Ethernet 10Gb 2-port FLR- T BCM57416 Adapter Notes: No embedded networking | P24740-B21 / -291 HPE Ethernet 10Gb 2-port FLR- T X550-AT2 (HPE Ethernet 10 GbE 2P 562FLR-T) Notes: No embedded networking | P24741-B21 / -291 HPE Ethernet 10Gb 2-port FLR-T X550-AT2 (HPE Ethernet 10 GbE 2P 562FLR- T) Notes: No embedded networking |
| | | P40408-B21 / -291 HPE Ethernet 10Gb 2-port FLR- T BCM57416 Adapter Notes: No embedded networking | P40407-B21 / -291 HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | Embedded 14-port S100i Notes: SATA only. | Embedded 14-port S100i Notes: SATA only. |
| Hard Drive | None included | None included | None included |
| Optical Drive | None included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x 800W | 1x 800W | 1x 800W |
| Fans | 5 - Standard | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Energy Star | Energy Star 3.0 | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes: UEFI is the standard default for all Pre-configured models.



Pre-Configured Models

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

| Powered by 2 nd Generation Intel Xeon Processors | | |
|---|--|---|
| Network Choice Models | | |
| SKU Number | P24742-B21 / P40406-B21 P24742-291 / P40406-291 | P24743-B21 / P40405-B21 P24743-291 / P40405-291 |
| Model Name | HPE ProLiant DL360 Gen10 6226R 2.9GHz 16-core 1P 32GB-R S100i NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 6248R 3.0GHz 24-core 1P 32GB-R S100i NC 8SFF 800W PS Server |
| Chassis | 8SFF | 8SFF |
| Processor | 6226R (16-Core, 2.9 GHz, 150W) | 6248R (24-Core, 3.0 GHz, 205W) |
| Number of Processors | One processor with High Performance heatsink | One processor with High Performance heatsink |
| Memory | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) |
| Network Controller | P24742-B21 / -291 HPE Ethernet 10Gb 2-port FLR-T X550- AT2 (HPE Ethernet 10 GbE 2P 562FLR-T) Notes: No embedded networking | P24743-B21 / -291 HPE Ethernet 10Gb 2-port FLR-T X550-AT2 (HPE Ethernet 10 GbE 2P 562FLR-T) Notes: No embedded networking |
| | P40406-B21 / -291 HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter Notes: No embedded networking | P40405-B21 / -291 HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter Notes: No embedded networking |
| Storage Controller | Embedded 14-port S100i Notes: SATA only. | Embedded 14-port S100i Notes: SATA only. |
| Hard Drive | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x 800W | 1x 800W |
| Fans | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | |
| Energy Star | Energy Star 3.0 | |
| Form Factor | 1U Rack | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | |

Notes: UEFI is the standard default for all Pre-configured models.

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.



Pre-Configured Models

| Powered by 2 nd Generation Intel Xeon Processors | | | |
|---|--|---|---|
| Network Choice Models | | | |
| SKU Number | P40636-B21 P40636-291 | P19774-B21 P19774-291 P19774-AA1 | P19776-B21 P19776-291 |
| Model Name | HPE ProLiant DL360 Gen10 4208 2.1GHz 8-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 4208 2.1GHz 8-core 1P 16GB-R P408i-a NC 8SFF 500W PS Server | HPE ProLiant DL360 Gen10 4208 2.1GHz 8-core 1P 16GB-R S100i NC 4LFF 500W PS Server |
| Chassis | 8SFF | 8SFF | 4LFF |
| Processor | 4208 (8 core, 2.1 GHz, 85W) | 4208 (8 core, 2.1 GHz, 85W) | 4208 (8 core, 2.1 GHz, 85W) |
| Number of Processors | One processor With standard heatsink | One processor With standard heatsink | One processor With standard heatsink |
| Memory | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2400 MT/s due to processor limitation. | 16 GB RDIMM 2R 2933 MT/s (1x 16 GB) Notes: Runs at 2400 MT/s due to processor limitation. | 16 GB RDIMM 2R 2933 MT/s (1x 16 GB) Notes: Runs at 2400 MT/s due to processor limitation. |
| Network Controller | P40636-B21 / -291 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking | P19774-B21 / -291 / -AA1 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking | P19776-B21 / -291 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery | Embedded 14-port S100i Notes: SATA only. |
| Hard Drive | None included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x 800W | 1x 500W | 1x 500W |
| Fans | 5 - Standard | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | LFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). |
| Energy Star | Energy Star 3.0 | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes: UEFI is the standard default for all Pre-configured models.

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.



Pre-Configured Models

| Powered by 2 nd Generation Intel Xeon Processors | | | |
|---|--|--|---|
| Network Choice Models | | | |
| SKU Number | P19779-B21 P19779-291 P19779-AA1 | P19775-B21 P19775-291 P19775-AA1 | P19176-B21 P19176-291 |
| Model Name | HPE ProLiant DL360 Gen10 4210 2.2GHz 10-core 1P 16GB-R P408i-a NC 8SFF 500W PS Server | HPE ProLiant DL360 Gen10 4214 2.2GHz 12-core 1P 16GB-R P408i-a NC 8SFF 500W PS Server | HPE ProLiant DL360 Gen10 5217 3.0GHz 8-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server |
| Chassis | 8SFF | 8SFF | 8SFF |
| Processor | 4210 (10 core, 2.2 GHz, 85W) | 4214 (12 cores, 2.2GHz, 85W) | 5217 (8 core, 3.0 GHz, 115W) |
| Number of Processors | One processor With standard heatsink | One processor With standard heatsink | One processor With standard heatsink |
| Memory | 16 GB RDIMM 2R 2933 MT/s (1x 16 GB) Notes: Runs at 2400 MT/s due to processor limitation. | 16GB RDIMM 2R 2933 MT/s (1x 16 GB) Notes: Runs at 2400 MT/s due to processor limitation. | 32GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2666 MT/s due to processor limitation. |
| Network Controller | P19779-B21 / -291 / -AA1 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking | P19775-B21 / -291 / -AA1 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking | P19176-B21 / -291 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery |
| Hard Drive | None included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x 500W | 1x 500W | 1x 800W |
| Fans | 5 - Standard | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Energy Star | Energy Star 3.0 | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes: UEFI is the standard default for all Pre-configured models.

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.



Pre-Configured Models

| Powered by 2 nd Generation Intel Xeon Processors | | | |
|---|---|--|--|
| Network Choice Models | | | |
| SKU Number | P19777-B21 P19777-291 | P19771-B21 / P40401-B21 P19771-291 / P40401-291 P19771-AA1 / P40401-AA1 | P19177-B21 P19177-291 |
| Model Name | HPE ProLiant DL360 Gen10 5218 2.3GHz 16-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 5220 2.2GHz 18-core 2P 64GB- R P408i-a NC 8SFF 800W RPS Server | HPE ProLiant DL360 Gen10 5220 2.2GHz 18-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server |
| Chassis | 8SFF | 8SFF | 8SFF |
| Processor | 5218 (16 cores, 2.3 GHz, 125W) | 5220 (18-Core, 2.2 GHz, 125W) | 5220 (18-Core, 2.2 GHz, 125W) |
| Number of Processors | One processor With standard heatsink | Two processors with standard heatsink | One processor With standard heatsink |
| Memory | 32GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2666 MT/s due to processor limitation. | 64 GB RDIMM 2R 2933 MT/s (2x 32 GB) Notes: Runs at 2666 MT/s due to processor limitation. | 32GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2666 MT/s due to processor limitation. |
| Network Controller | P19777-B21 / -291 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking | P19771-B21 / -291 / -AA1 HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT (HPE Ethernet 10/25 GbE 2P 640FLR-SFP28) Notes: No embedded networking P40401-B21 / -291 / -AA1 HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter Notes: No embedded networking | P19177-B21 / -291 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery |
| Hard Drive | None included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 3 PCIe: 1 x16 FH / 1 x8 LP + 1 x 16 FH | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x 800W | 2x 800W | 1x 800W |
| Fans | 5 - Standard | 7 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO Advanced | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Energy Star | Energy Star 3.0 | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes: UEFI is the standard default for all Pre-configured models.

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.



Pre-Configured Models

| Powered by 2 nd Generation Intel Xeon Processors | | | |
|---|--|--|--|
| Network Choice Models | | | |
| SKU Number | P19178-B21 / P40404-B21 P19178-291 / P40404-291 | P19778-B21 P19778-291 | P19179-B21 / P40403-B21 P19179-291 / P40403-291 |
| Model Name | HPE ProLiant DL360 Gen10 5222 3.8GHz 4-core 1P 32GB- R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 6230 2.1GHz 20-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 6234 3.3GHz 8-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server |
| Chassis | 8SFF | 8SFF | 8SFF |
| Processor | 5222 (4-core, 3.8 GHz, 105W) | 6230 (20 cores, 2.1 GHz, 125W) | 6234 (8-Core, 3.3 GHz, 130W) |
| Number of Processors | One processor With High Performance heatsink | One processor With standard heatsink | One processor With High Performance heatsink |
| Memory | 32GB RDIMM 2R 2933 MT/s (1x 32 GB) | 32GB RDIMM 2R 2933 MT/s (1x 32 GB) | 32GB RDIMM 2R 2933 MT/s (1x 32 GB) |
| Network Controller | P19178-B21 / -291 HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT (HPE Ethernet 10/25 GbE 2P 640FLR-SFP28) Notes: No embedded networking | P19778-B21 / -291 HPE Ethernet 1Gb 4-port FLR- T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking | P19179-B21 / -291 HPE Ethernet 10/25Gb 2- port FLR-SFP28 MCX4121A- ACFT (HPE Ethernet 10/25 GbE 2P 640FLR-SFP28) Notes: No embedded networking |
| | P40404-B21 / -291 HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter Notes: No embedded networking | | P40403-B21 / -291 HPE Ethernet 10/25Gb 2- port FLR-SFP28 BCM57414 Adapter Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery |
| Hard Drive | None included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x 800W | 1x 800W | 1x 800W |
| Fans | 5 - Standard | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Energy Star | Energy Star 3.0 | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes: UEFI is the standard default for all Pre-configured models.

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.



Pre-Configured Models

| Powered by 2 nd Generation Intel Xeon Processors | | | |
|---|--|---|---|
| Network Choice Models | | | |
| SKU Number | P19180-B21 / P40402-B21 P19180-291 / P40402-291 | P19772-B21 / P40400-B21 P19772-291 / P40400-291 P19772-AA1 / P40400-AA1 | P24744-B21 / P40399-B21 P24744-291 / P40399-291 |
| Model Name | HPE ProLiant DL360 Gen10 6242 2.8GHz 16-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server | HPE ProLiant DL360 Gen10 6248 2.5GHz 20-core 2P 64GB-R P408i-a NC 8SFF 800W RPS Server | HPE ProLiant DL360 Gen10 6250 3.9GHz 8-core 1P 32GB- R S100i NC 8SFF 800W PS Server |
| Chassis | 8SFF | 8SFF | 8SFF |
| Processor | 6242 (16-Core, 2.8 GHz, 150W) | 6248 (20-Core, 2.5 GHz, 150W) | 6250 (8-core, 3.9GHz, 185W) |
| Number of Processors | One processor With High Performance heatsink | Two processors with High Performance heatsink | One processor with High Performance heatsink |
| Memory | 32GB RDIMM 2R 2933 MT/s (1x 32 GB) | 64 GB RDIMM 2R 2933 MT/s (2x 32 GB) | 32GB RDIMM 2R 2933 MT/s (1x 32 GB) |
| Network Controller | P19180-B21 / -291 HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT (HPE Ethernet 10/25 GbE 2P 640FLR-SFP28) Notes: No embedded networking | P19772-B21 / -291 / -AA1 HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT (HPE Ethernet 10/25 GbE 2P 640FLR-SFP28) Notes: No embedded networking | P24744-B21 / -291 HPE Ethernet 10Gb 2-port FLR- T X550-AT2 (HPE Ethernet 10 GbE 2P 562FLR-T) Notes: No embedded networking |
| | P40402-B21 / -291 HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter Notes: No embedded networking | P40400-B21 / -291 / -AA1 HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter Notes: No embedded networking | P40399-B21 / -291 HPE Ethernet 10Gb 2-port FLR- T BCM57416 Adapter Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | P408i-a/2GB with Smart Storage Battery | Embedded 14-port S100i Notes: SATA only. |
| Hard Drive | None included | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 3 PCIe: 1 x16 FH / 1 x8 LP + 1 x 16 FH | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x 800W | 2x 800W | 1x 800W |
| Fans | 5 - Standard | 7 - Standard | 7 – High Performance |
| Management | HPE iLO 5 | HPE iLO Advanced | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits (“L” brackets). | | |
| Energy Star | Energy Star 3.0 | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes: UEFI is the standard default for all Pre-configured models.

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.



Pre-Configured Models

| Powered by 2 nd Generation Intel Xeon Processors | | |
|---|--|--|
| China Specific Network Choice Models | | |
| SKU Number | P23575-AA1 | P23577-AA1 |
| Model Name | HPE ProLiant DL360 Gen10 3206R 1.9GHz 8-core 1P 16GB-R P408i-a NC 8SFF 500W PS Server | HPE ProLiant DL360 Gen10 4215R 3.2GHz 8-core 1P 32GB-R S100i NC 8SFF 800W PS Server |
| Chassis | 8SFF | 8SFF |
| Processor | 3206R (8 core, 1.9 GHz, 85W) | 4215R (8-Core, 3.2 GHz, 130W) |
| Number of Processors | One processor with standard heatsink | One processor with High Performance heatsink |
| Memory | 16 GB RDIMM 2R 2933 MT/s (1x 16 GB) Notes: Runs at 2133 MT/s due to processor limitation. | 32 GB RDIMM 2R 2933 MT/s (1x 32 GB) Notes: Runs at 2400 MT/s due to processor limitation. |
| Network Controller | P23575-AA1 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking | P23577-AA1 HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 (HPE Ethernet 1Gb 4-port 366FLR Adapter) Notes: No embedded networking |
| Storage Controller | P408i-a/2GB with Smart Storage Battery | Embedded 14-port S100i Notes: SATA only. |
| Hard Drive | None included | None included |
| Optical Drive | Not included (Optical Drive options available) | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 1x 500W | 1x 800W |
| Fans | 5 - Standard | 5 - Standard |
| Management | HPE iLO 5 | HPE iLO 5 |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | |
| Energy Star | Energy Star 3.0 | |
| Form Factor | 1U Rack | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | |

Notes: UEFI is the standard default for all Pre-configured models.

Country Code Key

- B21 = Worldwide
- 291 = Japan
- AA1 = PRC

Notes: The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.



Pre-Configured Models

| Powered by 2 nd Generation Intel Xeon Processors | |
|---|--|
| Network Choice Models | |
| SKU Number | P63679-B21 |
| Model Name | HPE ProLiant DL360 Gen10 4208 2.1GHz 8-core 1P 64GB-R E208i-a NC 8SFF 960GB 500W RPS Server |
| Chassis | 8SFF |
| Processor | 4208 (8 core, 2.1 GHz, 85W) |
| Number of Processors | One processor With standard heatsink |
| Memory | 4x 16 GB RDIMM 2R 2933 MT/s Notes: Runs at 2400 MT/s due to processor limitation. |
| Network Controller | 1x HPE Ethernet 10Gb 2-port FLR-T BCM57416 Notes: No embedded network |
| Storage Controller | 1x E208i-a/8 internal lanes, no cache, 12G SAS |
| Hard Drive | 2x HPE 480GB SATA 6G Read Intensive SFF SC Multi Vendor SSD |
| Optical Drive | Not included (Optical Drive options available) |
| PCIe Slots | 2 PCIe: 1 x16 FH, 1 x8 LP |
| Power Supply | 2x 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit |
| Fans | 5 - Standard |
| Management | HPE iLO 5 HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features |
| Rail Kit | 1x SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). |
| Energy Star | Energy Star 3.0 |
| Form Factor | 1U Rack |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. |

Notes: UEFI is the standard default for all Pre-configured models.

Country Code Key

- B21 = North America (US and Canada) only
Notes: This -B21 SKU is to be ordered in US and Canada only. Latin America, EMEA and APJ are excluded.



Configuration Information

This section lists some of the steps required to configure a Factory Integrated Model.

To ensure valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot 9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more/erp-lot9-servers.html>

Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.

HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

Step 1: Base Configuration (choose one of the following configurable models)

Network Choice (NC) Models

Network Choice models do not include embedded LOM. To enable networking capability please select either a FlexibleLOM NIC or a validated alternative from the Core Options section.

| CTO Server | HPE DL360 Gen10 4LFF NC CTO Server | HPE DL360 Gen10 8SFF NC CTO Server | HPE DL360 Gen10 Premium 10NVMe NC CTO Svr |
|---|--|--|---|
| SKU Number | P19765-B21 | P19766-B21 | P19767-B21 |
| TAA SKU* | P19768-B21 | P19769-B21 | P19770-B21 |
| HPE Trusted Supply Chain for HPE ProLiant | P36394-B21 | | |
| Processor | Not included as standard | | |
| DIMM Slots | 24-DIMM slots (12 can be used for NVDIMMs or 12 can be used for HPE Persistent Memory) | | |
| Storage Controller | Embedded SW RAID (S100i) with 14 SATA ports Optional: Choice of HPE modular Smart Array and PCIe plug-in controller | | |
| PCIe | 2 PCIe slots (1 x16 FH / 1 x8 LP) Optional: 1 x16 FH or LP | | 2 PCIe slots (1 x16 FH / 1 x8 LP) |
| Drive Cage - included | 4 LFF - SAS/SATA | 8 SFF - SAS/SATA Optional: up to 2 NVMe or 2 Dual uFF (4x M.2 cartridges) | 10 NVMe - SAS/SATA/NVMe Optional: 1 Dual uFF (2x M.2 cartridges) |
| Network Controller | Choice of HPE FlexibleLOM for primary NIC and stand up card for additional NICs. Notes: No embedded networking. Minimum 1 quantity of select Networking (FlexibleLOM or PCIe) cards must be ordered to fulfill base model factory diagnostics. See QuickSpecs for valid options. | | |
| Fans | 1 CPU – 5 Standard Fans 2 CPU – 7 Standard Fans Optional: High Performance Fans | | 2 CPU – 7 High Performance Fans |
| Management | HPE iLO with Intelligent Provisioning (standard) Optional: iLO Advanced and OneView | | |
| USB | Front: 1 USB 3.0 + iLO service port Rear: 2 USB 3.0 Internal: 2 USB 3.0 Optional: 1 USB 2.0 (lose iLO serv. Port) | | Front: 1 USB 3.0 + iLO service port Rear: 2 USB 3.0 Internal: 2 USB 3.0 |

Configuration Information

| | |
|---|--|
| Rail Kit | Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits (“L” brackets). |
| Form Factor | 1U Rack |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. |
| CTO Server | HPE DL360 Gen10 8SFF BC NC CTO Server |
| SKU Number | P56949-B21 |
| HPE Trusted Supply Chain FIO Configuration | P36394-B21 |
| Processor | Not included as standard |
| DIMM Slots | 24-DIMM slots (12 can be used for NVDIMMs or 12 can be used for HPE Persistent Memory) |
| Storage Controller | Embedded SW RAID (S100i) with 14 SATA ports Optional: Choice of Broadcom tri-mode controller |
| PCIe | 2 PCIe slots (1 x16 FH / 1 x8 LP) Optional: 1 x16 FH or LP |
| Drive Cage - included | 8 SFF - SAS/SATA Optional: up to 2 NVMe or 2 Dual uFF (4x M.2 cartridges) |
| Network Controller | Choice of HPE FlexibleLOM for primary NIC and stand up card for additional NICs. Notes: No embedded networking. Minimum 1 quantity of select Networking (FlexibleLOM or PCIe) cards must be ordered to fulfill base model factory diagnostics. See QuickSpecs for valid options. |
| Fans | 1 CPU – 5 Standard Fans 2 CPU – 7 Standard Fans Optional: High Performance Fans |
| Management | HPE iLO with Intelligent Provisioning (standard) Optional: iLO Advanced and OneView |
| USB | Front: 1 USB 3.0 + iLO service port Rear: 2 USB 3.0 Internal: 2 USB 3.0 Optional: 1 USB 2.0 (lose iLO serv. Port) |
| Rail Kit | Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits (“L” brackets). |
| Form Factor | 1U Rack |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. |

Notes:

- HPE Trusted Supply Chain (P36394-B21) is an optional security upgrade intended for agencies and regulated industries with enhanced security and compliance needs. Applying this option to a DL360 Gen10 CTO server ensures it is built in the USA in a secured facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. The HPE ProLiant DL360 Gen10 server is re-branded as a HPE ProLiant DL360T Gen10 to denote the HPE Trusted Supply Chain security enhancements. The DL360T Gen10 is currently supported in the USA, exclusively, and is Trade Agreement Act (TAA) compliant. See "HPE Security" section within this document for more detail and learn more at <http://www.hpe.com/security>.
- *HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country. TAA compliance is only provided when HPE options are included as part of factory integrated orders (CTO). For compliance, select a TAA CTO server model from list above.
- HPE Persistent Memory is only supported on 2nd generation Intel Xeon Scalable processor series (Platinum 8200, Gold 6200, Gold 5200, Silver 4215 and 4215R).
- SKUs P19767-B21 & P19770-B21 do not support the Xeon-Gold 6250L or Gold 6250 processors.



Configuration Information

CTO Models with embedded LOM

| CTO Server | HPE DL360 Gen10 4LFF CTO Server | HPE DL360 Gen10 8SFF CTO Server | HPE DL360 Gen10 8SFF BC CTO System |
|--|--|--|---|
| SKU Number | 867958-B21 | 867959-B21 | P56950-B21 |
| TAA SKU* | 875965-B21 | 875966-B21 | N/A |
| HPE Trusted Supply Chain FIO Configuration | P36394-B21 | | |
| Processor | Not included as standard | | |
| DIMM Slots | 24-DIMM slots (12 can be used for NVDIMMs or 12 can be used for HPE Persistent Memory) | | |
| Storage Controller | Embedded SW RAID (S100i) with 14 SATA ports Optional: Choice of HPE modular Smart Array and PCIe plug-in controller | | Embedded SW RAID (S100i) with 14 SATA ports Optional: Choice of Broadcom tri-mode controller |
| PCIe | 2 PCIe slots (1 x16 FH / 1 x8 LP) Optional: 1 x16 FH or LP | | |
| Drive Cage - included | 4 LFF - SAS/SATA | 8 SFF - SAS/SATA Optional: up to 2 NVMe or 2 Dual uFF (4x M.2 cartridges) | 8 SFF - SAS/SATA |
| Network Controller | HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card | | |
| Fans | 1 CPU – 5 Standard Fans 2 CPU – 7 Standard Fans Optional: High Performance Fans | | |
| Management | HPE iLO with Intelligent Provisioning (standard) Optional: iLO Advanced and OneView | | |
| USB | Front: 1 USB 3.0 + iLO service port Rear: 2 USB 3.0 Internal: 2 USB 3.0 Optional: 1 USB 2.0 (lose iLO serv. Port) | | |
| Rail Kit | SFF Easy Install w/o CMA Notes: Server does not support shelf mounted rail kits ("L" brackets). | | |
| Form Factor | 1U Rack | | |
| Warranty | 3-year parts, 3-year labor, 3-year onsite support with next business day response. | | |

Notes:

- HPE Trusted Supply Chain (P36394-B21) is an optional security upgrade intended for agencies and regulated industries with enhanced security and compliance needs. Applying this option to a DL360 Gen10 CTO server ensures it is built in the USA in a secured facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. The HPE ProLiant DL360 Gen10 server is re-branded as a HPE ProLiant DL360T Gen10 to denote the HPE Trusted Supply Chain security enhancements. The DL360T Gen10 is currently supported in the USA, exclusively, and is Trade Agreement Act (TAA) compliant. See "HPE Security" section within this document for more detail and learn more at <http://www.hpe.com/security>.
- *HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country. TAA compliance is only provided when HPE options are included as part of factory integrated orders (CTO). For compliance, select a TAA CTO server model from list above.
- *TAA chassis are only orderable in North America and Canada.
- HPE Persistent Memory is only supported on 2nd generation Intel Xeon Scalable processor series (Platinum 8200, Gold 6200, Gold 5200, Silver 4215 and 4215R).



Configuration Information

Step 2: Choose Options

Please select one –L21 processor required below.

For second processor, please select the same processor model with –B21 from Core Options – HPE Processors section.

For example: first processor, select P02679-L21 then for second processor, select P02679-B21.

Notes:

- Mixing of 2 different processor models is not supported.
- For first processor, -L21 kit will include 5 fans. With the exception of Xeon-Gold 6256, Gold 6250L, Gold 6250, Gold 6212U, Gold 6210U, Gold 6209U & Gold 6208U processors, -B21 kits include 2 fans (for 4 LFF and 8 SFF CTO Server, 10 NVMe CTO Server always includes 7 High Performance fans).
- Processors with 130W or higher will ship with the High Performance heat sink plus SKUs 8256, 5222, 8156, 6128, 5122 as noted below. All other processors will ship with the Standard heat sink.
- When 2nd Generation Intel Xeon Scalable Processor is selected, then only DDR4-2933 Memory Kit can be selected; When 1st Generation Intel Xeon Scalable Processor is selected, then only DDR4-2666 Memory Kit can be selected.

Step 2a: Choose Processor Options

Processor Option Kits (Required Processor)

SKU

2nd Generation Intel Xeon- Platinum

Intel Xeon-Platinum 8280 (2.7GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02679-L21

Notes: Ships with High Performance Heatsink

Intel Xeon-Platinum 8280L (2.7GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02718-L21

Notes: Ships with High Performance Heatsink.

Intel Xeon-Platinum 8276 (2.2GHz/28-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02676-L21

Notes: Ships with High Performance Heatsink.

Intel Xeon-Platinum 8268 (2.9GHz/24-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02670-L21

Notes: Ships with High Performance Heatsink.

Intel Xeon-Platinum 8260 (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02661-L21

Notes: Ships with High Performance Heatsink.

Intel Xeon-Gold 6258R (2.7GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24488-L21

Notes: Ships with High Performance Heatsink.

Intel Xeon-Gold 6254 (3.1GHz/18-core/200W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02649-L21

Notes: Ships with High Performance Heatsink.

Intel Xeon-Gold 6252 (2.1GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02646-L21

Notes: Ships with High Performance Heatsink.

Intel Xeon-Gold 6252N (2.3GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P11851-L21

Notes: Ships with High Performance Heatsink.

Intel Xeon-Gold 6250 (3.9GHz/8-core/185W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P23741-L21

Notes:

- Ships with High Performance Heatsink.
- NVMe SSDs not supported with this processor.
- Not supported on Premium 10SFF NVMe chassis.
- Ambient temperature support up to 25C on 4LFF and 8SFF configurations. 2SFF cages not supported.
- High performance fans are required.

Intel Xeon-Gold 6248R (3.0GHz/24-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24487-L21

Notes:Ships with High Performance Heatsink.



Configuration Information

| | |
|--|------------|
| Intel Xeon-Gold 6248 (2.5GHz/20-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02640-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6246R (3.4GHz/16-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P24486-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6246 (3.3GHz/12-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P15443-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6244 (3.6GHz/8-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02634-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6242R (3.1GHz/20-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P24485-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6242 (2.8GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02628-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6240R (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P24484-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6240 (2.6GHz/18-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02625-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6240L (2.6GHz/18-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02643-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6238R (2.2GHz/28-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P24483-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6238 (2.1GHz/22-core/140W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02637-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6238L (2.1GHz/22-core/140W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02658-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6234 (3.3GHz/8-core/130W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02604-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6230R (2.1GHz/26-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P24482-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6230 (2.1GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02607-L21 |
| Intel Xeon-Gold 6230N (2.3GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P11848-L21 |
| Intel Xeon-Gold 6226R (2.9GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P24481-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6226 (2.7GHz/12-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02601-L21 |
| Intel Xeon-Gold 6212U (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02667-L21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6208U (2.9GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P24489-L21 |
| Notes: | |
| – Ships with High Performance Heatsink. | |
| – Only supported in single socket configurations | |
| Intel Xeon-Gold 5222 (3.8GHz/4-core/105W) FIO Processor Kit for HPE ProLiant DL360 Gen10 | P02709-L21 |
| Notes: Ships with High Performance Heatsink. | |



Configuration Information

Intel Xeon-Gold 5220R (2.2GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P15995-L21

Notes: Ships with High Performance Heatsink.

Intel Xeon-Gold 5220 (2.2GHz/18-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02595-L21

Intel Xeon-Gold 5218R (2.1GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24480-L21

Intel Xeon-Gold 5218 (2.3GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02592-L21

Intel Xeon-Gold 5218N (2.3GHz/16-core/110W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P11845-L21

Intel Xeon-Gold 5217 (3.0GHz/8-core/115W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02589-L21

Intel Xeon-Gold 5215 (2.5GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02586-L21

2nd Generation Intel Xeon- Silver

Intel Xeon-Silver 4216 (2.1GHz/16-core/100W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02583-L21

Intel Xeon-Silver 4215R (3.2GHz/8-core/130W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24479-L21

Notes: Ships with Performance Heatsink.

Intel Xeon-Silver 4214R (2.4GHz/12-core/100W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P15977-L21

Intel Xeon-Silver 4214 (2.2GHz/12-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02580-L21

Intel Xeon-Silver 4210R (2.4GHz/10-core/100W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P15974-L21

Intel Xeon-Silver 4210 (2.2GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02574-L21

Intel Xeon-Silver 4208 (2.1GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02571-L21

2nd Generation Intel Xeon- Bronze

Intel Xeon-Bronze 3206R (1.9GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P15968-L21

Intel Xeon-Bronze 3204 (1.9GHz/6-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02565-L21

1st Generation Intel Xeon:

For information on obsolete 1st Generation Xeon processors, please visit

[HPE DL360 Gen10 QuickSpecs version 43](#)

Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go to:

<https://www.hpe.com/docs/memory-population-rules>

For Gen10 memory speed table, please go to: **<https://www.hpe.com/docs/memory-speed-table>**

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: **<http://www.hpe.com/docs/memory-ras-feature>**.

Notes:

- Maximum memory capacity and speed per processor is dependent on processor model selection or limitation.
- DDR4-2933 Memory Kits are only supported with 2nd Generation Intel Xeon Scalable Series Processors and DDR4-2666 Memory Kits are only supported with 1st Generation Intel Xeon Scalable Series Processors.

Registered DIMMs (RDIMMs) for 2nd Generation Intel Xeon Scalable Series

HPE 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit P00930-B21

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit P00924-B21

HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit P00922-B21

HPE 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit P00920-B21

HPE 8GB (1x8GB) Single Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit P00918-B21



Configuration Information

Registered DIMMs (RDIMMs) for 1st Generation Intel Xeon Scalable Series

| | |
|---|------------|
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815100-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 835955-B21 |

Notes:

For configurations exceeding 1TB/socket, the “M” series (2TB/socket) or “L” series processors (4.5TB/socket) are required.

For configurations with 2 CPUs, DIMMs need to be selected in even quantities. Using odd quantity of DIMMs in 2 CPU configurations will cause memory to be unbalanced and may negatively impact system performance

Load Reduced DIMMs (LRDIMMs) for 2nd Generation Intel Xeon Scalable Series

| | |
|---|------------|
| HPE 128GB (1x128GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit | P11040-B21 |
|---|------------|

Notes:

- Memory DIMM availability with a server platform is dependent upon completion of certification testing.
- The maximum memory speed is a function of the memory type, memory configuration, and processor mode
- Mixing of RDIMM and LRDIMM is not supported.

For configurations exceeding 1TB/socket, the “M” series (2TB/socket) or “L” series processors (4.5TB/socket) are required.

HPE Persistent Memory

| | |
|---|------------|
| Intel Optane 512GB persistent memory 100 Series for HPE | 835810-B21 |
| Intel Optane 128GB persistent memory 100 Series for HPE | 835804-B21 |

Notes:

- A maximum of 12 Intel Optane Persistent Memory for HPE supported with select 2nd Generation Intel Xeon Scalable Series Processors ONLY (82xx/62xx/52xx/4215R/4215) and can only be mixed with either RDIMMs or LRDIMMs.
- For configurations exceeding 1TB/socket, the “M” series (2TB/socket) or “L” series processors (4.5TB/socket) are required.
- When mixing Intel Optane persistent memory with RDIMM, all RDIMM must be of same capacity and type.
- For information regarding Intel Optane Persistent Memory for HPE visit:
<http://www.hpe.com/info/persistentmemory>

HPE Persistent Memory (NVDIMM)

Step 2c: Choose Power Supplies

Please select one or two power supplies from below.

Notes: Mixing of 2 different power supplies is NOT supported.

HPE Flex Slot Power Supplies

| | |
|--|------------|
| HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 865408-B21 |
| HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit | 865438-B21 |
| HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 865414-B21 |
| HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit | 865434-B21 |
| HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit | 865428-B21 |
| HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 830272-B21 |

Notes: 1600W Power supplies only support high line voltage (200 VAC to 240 VAC).



Configuration Information

Step 3: Choose Additional (FIO) Factory Integratable Options

Each of the following may be selected if desired at time of factory integration

| | |
|--|------------|
| HPE Trusted Platform Module 2.0 Gen10 Option | 864279-B21 |
| HPE Server Platform LDevID FIO Setting | P49803-B21 |
| HPE Server Identity LDevID FIO Setting | P49814-B21 |

Notes:

- HPE Trusted Platform Module 2.0 option works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants.
- HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

| | |
|-------------------------------|------------|
| HPE Gen10 TPM 1.2 FIO Setting | 872108-B21 |
|-------------------------------|------------|

Notes: TPM 2.0 is set as default, for 1.2 TPM setting instead, please select this option.

| | |
|-----------------------------|------------|
| HPE Legacy FIO Mode Setting | 758959-B22 |
|-----------------------------|------------|

Notes: UEFI is the default, this FIO part can be used for CTO to enable Legacy mode.

HPE Security Options

HPE Server Security Optimized Service for HPE ProLiant (R9S59A) is an optional security upgrade intended for agencies and regulated industries with enhanced security and compliance needs. Applying this option to a DL3XX Gen10/Gen10 Plus CTO server ensures it is hardened by turning on advanced safeguards in place against cyber-exploits throughout the server lifecycle. An iLO Advanced License required for High Security Mode and compatible intrusion detection device option kits are prerequisites for the full optimization service.

Step 4: Choose Additional Options for Factory Integration from Core and Additional Option sections below

| | |
|--|--------|
| HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU | E5Y43A |
| HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU | P8B31A |



Core Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Unique Options

Risers

| | |
|---|------------|
| HPE DL360 Gen10 Low Profile Riser Kit | 867982-B21 |
| HPE DL360 Gen10 SATA M.2 2280 Riser Kit | 867978-B21 |
| HPE DL360 Gen10 2P FH GPU Enablement v2 Kit | P23271-B21 |

Notes:

- Replaces 867980-B21. Enhanced to support additional GPUs and compatible with all GPUs qualified on DL360 Gen10.
- This kit is not available on the 10 NVMe model.

| Riser Information** | | | | | | | | | |
|---------------------|--|----------------|----------------|-----------------------------|------------------|-----|---------------------|----------|--|
| Part number | Description | Riser position | | Slot Bus width (Gen3 lanes) | | | NVMe Direct Connect | | |
| | | Primary | Secondary | #1 | #2 | #3 | Connectors | Max SSDs | |
| N/A | HPE DL360 Gen10 x16/x8 Primary GPU Riser | D | N | x1 6 | x8 | O | N/A | N/A | |
| 867978-B21 | HPE DL360 Gen10 x16/x16 SATA M.2 2280 Riser Kit | O | N | x1 6 | x16 | O | N/A | N/A | |
| P23271-B21 | HPE DL360 Gen10 x16 FH GPU v2 Riser Kit | N | O | O | N/A ⁴ | x16 | N/A | N/A | |
| 867982-B21 | HPE DL360 Gen10 x16 LP Riser Kit | N | O | O | O | x16 | N/A | N/A | |
| N/A | HPE DL360 Gen10 x16/x8 1-port 2SFF NVMe Riser ¹ | O | N | x1 6 | x8 | O | 1 | 2 | |
| N/A | HPE DL360 Gen10 5-port 10SFF NVMe Riser Kit ² | N | D ³ | O | O | O | 5 | 10 | |
| 867972-B21 | HPE DL360 Gen10 1SFF SAS/SATA Rear Backplane Kit | O | N | O | x8 | O | N/A | N/A | |

Notes:

- D = Default on chassis; O = Optional; N = not supported or slot/connector not present.
- ¹Included on 2SFF NVMe Backplane Kit (871242-B21)
- ²Included on 10SFF chassis (867960-B21, 875967-B21, P19767-B21 & P19770-B21) or 10SFF Premium backplane kit (867974-B21)
- ³Included on 10SFF chassis (867960-B21, 875967-B21, P19767-B21 & P19770-B21)
- ⁴When secondary full height kit is installed, then primary PCIe Slot #2 cannot be used. Only 2 full height slots are supported.
- *For additional details on ProLiant DL Gen10 server risers, please visit: <https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>
- **For information on obsolete x16 FH GPU riser please consult **HPE DL360 Gen10 QuickSpecs version 37**

Performance Cooling Options

| | |
|--|------------|
| HPE DL360 Gen10 High Performance Heat Sink Kit | 871246-B21 |
| HPE DL360 Gen10 High Performance Fan Kit | 871244-B21 |

Core Options

Tri-mode controller to SAS/SATA Options

HPE ProLiant DL36x Gen10 Plus 2SFF SAS/SATA Tri-Mode Cable Kit P55883-B21

Notes:

- Max = 1
- When 2SFF Basic Carrier Backplane drive cage is selected then 2SFF SAS/SATA tri-mode cable kit must be selected.
- This option is supported on 8SFF Basic Carrier CTO Server Model-X only

HPE ProLiant DL36x Gen10 Plus 8SFF SAS/SATA PCIe Slot2 Tri-Mode Cable Kit P55884-B21

Notes:

- Max = 1
- This option is supported on 8SFF Basic Carrier CTO Server Model-X only.

Universal Media Bay Options

Notes: <http://www.hpe.com/info/CablingMatrixGen10> can help to explain the cable routing for each option listed below

HPE ProLiant DL360 Gen10 Plus 2SFF SAS/SATA 12G BC Drive Cage Kit P26435-B21

Notes: Not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations. Supported only with 8SFF Basic Carrier CTO Server Model-X

HPE DL360 Gen10 2SFF SAS/SATA Backplane Kit 867966-B21

Notes: Not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations.

HPE DL360 Gen10 2SFF NVMe Backplane Kit 871242-B21

Notes: Not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations.

HPE DL360 Gen10 2SFF SATA UFF Backplane Kit 867970-B21

Notes: Not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations.

HPE DL360 Gen10 8SFF Display Port/USB/Optical Drive Blank Kit 868000-B21

Notes: This kit is required for Optical Drive option (8SFF model only).

HPE DL360 Gen10 LFF Display Port and USB Kit 868004-B21

Optical Drive Options

HPE Mobile USB DVD-RW Optical Drive 701498-B21

Notes: This kit is supported on USB 3.0 ports only.

HPE 9.5mm SATA DVD-ROM Optical Drive 726536-B21

HPE 9.5mm SATA DVD-RW Optical Drive 726537-B21

Configuring Broadcom MegaRAID Tri-mode controllers and required components on DL360 Gen10

Notes:

- DL360 Gen10 with Broadcom MegaRAID controllers only support Basic Carrier SFF SAS/SATA storage devices listed below and require Basic Carrier drive cage(s) with cables needed for MegaRAID controllers.
- Do not attempt to use Smart Carrier storage devices in these DL360 models with MegaRAID controllers. Mixing of BC and SC carrier types is not allowed.
- NVMe is not supported with DL360 Gen10 with MegaRAID storage controllers.

Select CTO Server – One from below

HPE DL360 Gen10 NC 8SFF BC CTO Svr P56949-B21

Notes: This CTO Server contains default SAS/SATA drive cage/backplane and tri-mode to SAS/SATA cables.

HPE DL360 Gen10 8SFF BC CTO Svr P56950-B21

Notes: This CTO Server contains default SAS/SATA drive cage/backplane and tri-mode to SAS/SATA cables.



Core Options

Select Broadcom MegaRAID Controller – Shown below

| | |
|---|------------|
| Broadcom MegaRAID MR416i-p x16 Lanes 4GB Cache NVMe/SAS 12G Controller for HPE Gen10 Plus | P06367-B21 |
| Broadcom MegaRAID MR416i-a x16 Lanes 4GB Cache NVMe/SAS 12G Controller for HPE Gen10 Plus | P26279-B21 |
| Broadcom MegaRAID MR216i-p x16 Lanes without Cache NVMe/SAS 12G Controller for HPE Gen10 Plus | P26324-B21 |
| Broadcom MegaRAID MR216i-a x16 Lanes without Cache NVMe/SAS 12G Controller for HPE Gen10 Plus | P26325-B21 |

Select Any Additional Backplane & Drive Cage Kit – Shown below

| | |
|---|------------|
| HPE ProLiant DL360 Gen10 Plus 8SFF SAS/SATA 12G BC Backplane Kit | P26427-B21 |
| HPE ProLiant DL360 Gen10 Plus 8SFF x1 Tri-Mode 24G U.3 BC Backplane Kit | P26431-B21 |
| HPE ProLiant DL360 Gen10 Plus 2SFF SAS/SATA 12G BC Drive Cage Kit | P26435-B21 |
| HPE ProLiant DL360 Gen10 Plus 2SFF x4 Tri-Mode 24G BC Drive Cage Kit | P26437-B21 |
| HPE ProLiant DL360 Gen10 Plus 2SFF x4 NVMe 16G U.2 BC Drive Cage Kit | P26439-B21 |
| HPE ProLiant DL360 Gen10 Plus 8SFF x4 Tri-Mode 24G U.3 BC Backplane Kit | P26429-B21 |
| HPE ProLiant DL360 Gen10 Plus 8SFF x4 NVMe 16G U.2 BC Backplane Kit | P26433-B21 |
| HPE ProLiant DL360 Gen10 Plus 8SFF Display Port/USB/Optical Drive Blank Kit | P40003-B21 |

Notes: All kits shown above contain the required drive cage/backplane and tri-mode to SAS/SATA cables.

Select Basic Carrier Drives

| |
|---|
| Enterprise - 12G SAS – Basic Carrier SFF Drives |
| Midline - 12G SAS – Basic Carrier SFF Drives |
| Read Intensive - 12G SAS - SFF – Basic Carrier SSD |
| Mixed Use - 12G SAS – Basic Carrier SFF SSD |
| Mixed Use - 12G SAS - SFF – Basic Carrier Value SAS Digitally Signed Firmware SSD |
| Read Intensive - 6G SATA – Basic Carrier SFF - Solid State Drives |
| Mixed Use - 6G SATA – Basic Carrier SFF - Solid State Drives |

Notes: Only Basic Carrier (BC) drives listed in above sections of Quickspecs will function with Broadcom MegaRAID controllers. Smart carrier (SC) drives will not function with Broadcom controllers. Configurations must not mix BC and SC drives.

System Insight Display Options

| | |
|---|------------|
| HPE DL360 Gen10 SFF System Insight Display Power Module Kit | 867996-B21 |
| HPE DL360 Gen10 LFF System Insight Display Power Module Kit | 867994-B21 |

Rear Drive Option Kit

| | |
|--|------------|
| HPE DL360 Gen10 1SFF Rear SAS/SATA/UFF Backplane Kit | 867972-B21 |
|--|------------|

10 NVMe chassis Upgrade Kit

| | |
|---|------------|
| HPE DL360 Gen10 10SFF Premium Backplane Kit | 867974-B21 |
|---|------------|

Notes:

- This kit is supported on the 8SFF model only.
- This kit requires two processors, not supported on single processor configurations.
- Requires High Performance Fan Kit (871244-B21).

<http://www.hpe.com/info/CablingMatrixGen10> can help to explain the cable routing for each option above.

Core Options

Security

HPE Trusted Supply Chain for HPE ProLiant

P36394-B21

Notes:

- HPE Trusted Supply Chain (P36394-B21) is an optional security upgrade intended for agencies and regulated industries with enhanced security and compliance needs. Applying this option to a DL360 Gen10 CTO server ensures it is built in the USA in a secured facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. The HPE ProLiant DL360 Gen10 server is re-branded as a HPE ProLiant DL360T Gen10 to denote the HPE Trusted Supply Chain security enhancements. The DL360T Gen10 is currently supported in the USA, exclusively, and is Trade Agreement Act (TAA) compliant. See "HPE Security" section within this document for more detail and learn more at <http://www.hpe.com/security>.
- This option requires the selection of HPE Gen10 Intrusion Detection Kit (867984-B21)
- This option requires the selection of either HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features (BD505A) or HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features (512485-B21)
- This option is limited to stand-alone DL360 Gen10 CTO servers only. The HPE Trusted Supply Chain configuration will not be available if the server is ordered as factory integrated into a rack
- One instance of the following Electronic License to Use is required per order (not per server): R6X85AAE - HPE Trusted Supply Chain E-LTU
- Logistics delivery speeds and services are available and selectable within Next Gen Quoter.
- This option cannot be selected with TAA CTO Models

HPE Trusted Platform Module 2.0 Gen10 Option

864279-B21

HPE DL360 Gen10 Chassis Intrusion Detection Kit

867984-B21

HPE 1U Gen10 Bezel Kit

867998-B21

HPE Bezel Lock Kit

875519-B21

Notes: Requires bezel kit (867998-B21).

HPE Processors

Please select one –L21 processor required above.

For second processor, please select the same processor model with –B21 from Core Options – HPE Processors section below.

For example: first processor, select P02679-L21 then for second processor, select P02679-B21.

Notes:

- Field upgrades from 1st generation processors (x1xx) to 2nd generation processors (x2xx) not supported.
- Upgrades to two processors must be performed by HPE Pointnext or an approved Service Delivery Partner.
- Mixing of 2 different processor models is not supported.
- For first processor, –L21 kit will include 5 fans. With the exception of Xeon-Gold 6256, Gold 6250L, Gold 6250, Gold 6212U, Gold 6210U, Gold 6209U & Gold 6208U processors, –B21 kits include 2 fans (for 4 LFF and 8 SFF CTO Server, 10 NVMe CTO Server always includes 7 High Performance fans).
- Processors with 130W or higher will ship with the High Performance heat sink plus SKUs 8256, 5222, 8156, 6128, 5122 as noted below. All other processors will ship with the Standard heat sink.
- When 2nd Generation Intel Xeon Scalable Processor is selected, then only DDR4-2933 Memory Kit can be selected; When 1st Generation Intel Xeon Scalable Processor is selected, then only DDR4-2666 Memory Kit can be selected

2nd Generation Intel Xeon-Platinum

Intel Xeon-Platinum 8280 (2.7GHz/28-core/205W) Processor Kit for HPE ProLiant DL360 Gen10

P02679-B21

Notes: Ships with High Performance Heatsink.

Intel Xeon-Platinum 8280L (2.7GHz/28-core/205W) Processor Kit for HPE ProLiant DL360 Gen10

P02718-B21

Notes: Ships with High Performance Heatsink.



Core Options

| | |
|--|------------|
| Intel Xeon-Platinum 8276 (2.2GHz/28-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 | P02676-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Platinum 8268 (2.9GHz/24-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 | P02670-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Platinum 8260 (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 | P02661-B21 |
| Notes: Ships with High Performance Heatsink. | |
| 2nd Generation Intel Xeon-Gold | |
| Intel Xeon-Gold 6258R (2.7GHz/28-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 | P24488-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6254 (3.1GHz/18-core/200W) Processor Kit for HPE ProLiant DL360 Gen10 | P02649-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6252 (2.1GHz/24-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P02646-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6252N (2.3GHz/24-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P11851-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6250 (3.9GHz/8-core/185W) Processor Kit for HPE ProLiant DL360 Gen10 | P23741-B21 |
| Notes: | |
| – Ships with High Performance Heatsink. | |
| – NVMe SSDs not supported with this processor. | |
| – Not supported on Premium 10SFF NVMe chassis. | |
| – Ambient temperature support up to 25C on 4LFF and 8SFF configurations. 2SFF cages not supported. | |
| – High performance fans are required. | |
| Intel Xeon-Gold 6248R (3.0GHz/24-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 | P24487-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6248 (2.5GHz/20-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P02640-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6246R (3.4GHz/16-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 | P24486-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6246 (3.3GHz/12-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 | P15443-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6244 (3.6GHz/8-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P02634-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6242R (3.1GHz/20-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 | P24485-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6242 (2.8GHz/16-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P02628-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6240R (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 | P24484-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6240 (2.6GHz/18-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P02625-B21 |
| Notes: Ships with High Performance Heatsink. | |



Core Options

| | |
|--|------------|
| Intel Xeon-Gold 6240L (2.6GHz/18-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P02643-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6238R (2.2GHz/28-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 | P24483-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6238 (2.1GHz/22-core/140W) Processor Kit for HPE ProLiant DL360 Gen10 | P02637-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6238L (2.1GHz/22-core/140W) Processor Kit for HPE ProLiant DL360 Gen10 | P02658-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6234 (3.3GHz/8-core/130W) Processor Kit for HPE ProLiant DL360 Gen10 | P02604-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6230R (2.1GHz/26-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P24482-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6230 (2.1GHz/20-core/125W) Processor Kit for HPE ProLiant DL360 Gen10 | P02607-B21 |
| Intel Xeon-Gold 6230N (2.3GHz/20-core/125W) Processor Kit for HPE ProLiant DL360 Gen10 | P11848-B21 |
| Intel Xeon-Gold 6226R (2.9GHz/16-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P24481-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 6226 (2.7GHz/12-core/125W) Processor Kit for HPE ProLiant DL360 Gen10 | P02601-B21 |
| Intel Xeon-Gold 6212U (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 | P02667-B21 |
| Notes: | |
| – Ships with High Performance Heatsink. | |
| – Only supported in single socket configurations. | |
| Intel Xeon-Gold 6208U (2.9GHz/16-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P24489-B21 |
| Notes: | |
| – Ships with High Performance Heatsink. | |
| – Only supported in single socket configurations. | |
| Intel Xeon-Gold 5222 (3.8GHz/4-core/105W) Processor Kit for HPE ProLiant DL360 Gen10 | P02709-B21 |
| Intel Xeon-Gold 5220R (2.2GHz/24-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 | P15995-B21 |
| Notes: Ships with High Performance Heatsink. | |
| Intel Xeon-Gold 5220 (2.2GHz/18-core/125W) Processor Kit for HPE ProLiant DL360 Gen10 | P02595-B21 |
| Intel Xeon-Gold 5218R (2.1GHz/20-core/125W) Processor Kit for HPE ProLiant DL360 Gen10 | P24480-B21 |
| Intel Xeon-Gold 5218 (2.3GHz/16-core/125W) Processor Kit for HPE ProLiant DL360 Gen10 | P02592-B21 |
| Intel Xeon-Gold 5218N (2.3GHz/16-core/110W) Processor Kit for HPE ProLiant DL360 Gen10 | P11845-B21 |
| Intel Xeon-Gold 5217 (3.0GHz/8-core/115W) Processor Kit for HPE ProLiant DL360 Gen10 | P02589-B21 |
| Intel Xeon-Gold 5215 (2.5GHz/10-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 | P02586-B21 |
| 2nd Generation Intel Xeon-Silver | |
| Intel Xeon-Silver 4216 (2.1GHz/16-core/100W) Processor Kit for HPE ProLiant DL360 Gen10 | P02583-B21 |
| Intel Xeon-Silver 4215R (3.2GHz/8-core/130W) Processor Kit for HPE ProLiant DL360 Gen10 | P24479-B21 |
| Notes: Ships with Performance Heatsink. | |
| Intel Xeon-Silver 4214R (2.4GHz/12-core/100W) Processor Kit for HPE ProLiant DL360 Gen10 | P15977-B21 |
| Intel Xeon-Silver 4214 (2.2GHz/12-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 | P02580-B21 |
| Intel Xeon-Silver 4210R (2.4GHz/10-core/100W) Processor Kit for HPE ProLiant DL360 Gen10 | P15974-B21 |



Core Options

| | |
|--|------------|
| Intel Xeon-Silver 4210 (2.2GHz/10-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 | P02574-B21 |
| Intel Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 | P02571-B21 |

2nd Generation Intel Xeon- Bronze

| | |
|--|------------|
| Intel Xeon-Bronze 3206R (1.9GHz/8-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 | P15968-B21 |
| Intel Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 | P02565-B21 |

1st Generation Intel Xeon:

For information on obsolete 1st Generation Xeon processors, please visit

[HPE DL360 Gen10 QuickSpecs version 4.3](#)

HPE Memory

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go to:

<https://www.hpe.com/docs/memory-population-rules>

For Gen10 memory speed table, please go to: **<https://www.hpe.com/docs/memory-speed-table>**

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: **<http://www.hpe.com/docs/memory-ras-feature>**

Notes:

- Maximum memory capacity and speed per processor is dependent on processor model selection or limitation.
- DDR4-2933 Memory Kits are only supported with 2nd Generation Intel Xeon Scalable Series Processors and DDR4-2666 Memory Kits are only supported with 1st Generation Intel Xeon Scalable Series Processors.

HPE DDR4 Memory

Registered DIMMs (RDIMMs) for 2nd Generation Intel Xeon Scalable Series

| | |
|---|------------|
| HPE 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00930-B21 |
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00924-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00922-B21 |
| HPE 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00920-B21 |
| HPE 8GB (1x8GB) Single Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00918-B21 |

Registered DIMMs (RDIMMs) for 1st Generation Intel Xeon Scalable Series

| | |
|---|------------|
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 815100-B21 |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit | 835955-B21 |

Load Reduced DIMMs (LRDIMMs) for 2nd Generation Intel Xeon Scalable Series

| | |
|---|------------|
| HPE 128GB (1x128GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit | P11040-B21 |
|---|------------|

HPE Persistent Memory

| | |
|---|------------|
| Intel Optane 512GB persistent memory 100 Series for HPE | 835810-B21 |
| Intel Optane 128GB persistent memory 100 Series for HPE | 835804-B21 |

Notes:

- A maximum of 12 HPE Persistent Memory Kits supported on the following 2nd Generation Intel Xeon Scalable Processor series (Platinum 8200, Gold 6200, Gold 5200, Silver 4215 and 4215R)
- For additional information regarding HPE Persistent Memory Population Rules and Guidelines for Gen10 visit: **<http://www.hpe.com/docs/memory-population-rules>**



Core Options

HPE Persistent Memory (NVDIMM)

HPE 16GB NVDIMM Single Rank x4 DDR4-2666 Module Kit

845264-B21

Notes:

- Can only be mixed with RDIMMs.
- A maximum of 12 NVDIMMs supported with 1st generation Intel Xeon Scalable processors.
- For General Server Memory and NVDIMM Population Rules and Guidelines for Gen10 see details here: <http://www.hpe.com/docs/memory-population-rules>

HPE Boot Controllers

HPE NS204i-p x2 Lanes NVMe PCIe3 x8 OS Boot Device

P12965-B21

HPE Storage Controllers

Notes: For additional details, please see [HPE Smart Array Gen10 Controllers Data Sheet](#) at:

HPE Smart Array SR Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers

HPE Flexible Smart Array Controllers

Notes: <http://www.hpe.com/info/CablingMatrixGen10> can help to explain the cable routing for each option below,

| | |
|--|------------|
| HPE Smart Array P816i-a SR Gen10 (16 Internal Lanes/4GB Cache/SmartCache) 12G SAS Modular Controller | 804338-B21 |
| HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular Controller | 804331-B21 |
| HPE Smart Array P816i-a SR Gen10 (16 Int Lanes/4GB Cache/SmartCache) 12G SAS Modular LH Controller | 869083-B21 |
| HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular LH Controller | 869081-B21 |
| HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular LH Controller | 869079-B21 |
| HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular Controller | 804326-B21 |

Notes: The Low Height (LH) controller is required when a PCIe card that exceeds half-length is used in slots 2 or 3.

HPE Smart Array Controllers

Notes: <http://www.hpe.com/info/CablingMatrixGen10> can help to explain the cable routing for each option below.

| | |
|---|------------|
| HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller | 804405-B21 |
| HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller | 830824-B21 |
| Notes: Not supported on slot 3. | |
| HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller | 804398-B21 |
| HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller | 804394-B21 |
| Notes: Not supported on slot 3. | |

| | |
|--|------------|
| HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit | P01366-B21 |
|--|------------|

Notes: Supports up to 6 P-class Smart Array controllers

| | |
|---|------------|
| HPE Smart Storage Hybrid Capacitor with 145mm Cable Kit | P02377-B21 |
|---|------------|

Notes: Supports up to 3 P-class Smart Array controllers

HPE Flexible Tri-Mode Array Controllers

| | |
|---|------------|
| Broadcom MegaRAID MR216i-a x16 Lanes without Cache NVMe/SAS 12G Controller for HPE Gen10 Plus | P26325-B21 |
| Broadcom MegaRAID MR416i-a x16 Lanes 4GB Cache NVMe/SAS 12G Controller for HPE Gen10 Plus | P26279-B21 |
| Broadcom MegaRAID MR216i-p x16 Lanes without Cache NVMe/SAS 12G Controller for HPE Gen10 Plus | P26324-B21 |
| Broadcom MegaRAID MR416i-p x16 Lanes 4GB Cache NVMe/SAS 12G Controller for HPE Gen10 Plus | P06367-B21 |

Notes: Windows Server 2012 R2 is not supported for Broadcom MR controllers.



Core Options

Cable Kits

| | |
|--|------------|
| HPE DL360 Gen10 SFF Internal Cable Kit | 867990-B21 |
| HPE DL3XX Gen10 Rear Serial Cable and Enablement Kit | 873770-B21 |

HPE Hard Disk Drives

For HDDs with optimal product availability, HPE advocates HDDs from the list located here:

Enterprise - 12G SAS - SFF Basic Carrier Drives (Only for use with Broadcom MegaRAID)

| | |
|---|------------|
| HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD | P28352-B21 |
| HPE 2TB SAS 12G Business Critical 7.2K SFF BC 1-year Warranty 512e HDD | P28505-B21 |
| HPE 1.8TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD | P53562-B21 |
| HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD | P28586-B21 |
| HPE 1TB SAS 12G Business Critical 7.2K SFF BC 1-year Warranty HDD | P53563-B21 |
| HPE 900GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD | P40432-B21 |
| HPE 600GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD | P53560-B21 |
| HPE 600GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD | P53561-B21 |
| HPE 300GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD | P28028-B21 |
| HPE 300GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD | P40430-B21 |

Notes: Basic Carrier drives support on 8SFF Basic Carrier CTO Server only

Enterprise - 12G SAS - SFF Drives

| | |
|---|------------|
| HPE 2.4TB SAS 12G Mission Critical 10K SFF SC 3-year Warranty 512e Multi Vendor HDD | 881457-B21 |
| HPE 1.8TB SAS 12G Mission Critical 10K SFF SC 3-year Warranty 512e Multi Vendor HDD | 872481-B21 |
| HPE 1.2TB SAS 12G Mission Critical 10K SFF SC 3-year Warranty Multi Vendor HDD | 872479-B21 |
| HPE 900GB SAS 12G Mission Critical 15K SFF SC 3-year Warranty Multi Vendor HDD | 870759-B21 |
| HPE 600GB SAS 12G Mission Critical 15K SFF SC 3-year Warranty Multi Vendor HDD | 870757-B21 |
| HPE 600GB SAS 12G Mission Critical 10K SFF SC 3-year Warranty Multi Vendor HDD | 872477-B21 |
| HPE 300GB SAS 12G Mission Critical 15K SFF SC 3-year Warranty Multi Vendor HDD | 870753-B21 |
| HPE 300GB SAS 12G Mission Critical 10K SFF SC 3-year Warranty Multi Vendor HDD | 872475-B21 |

Midline - 12G SAS - SFF Drives

| | |
|--|------------|
| HPE 2TB SAS 12G Business Critical 7.2K SFF SC 1-year Warranty 512e HDD | 765466-B21 |
| HPE 1TB SAS 12G Business Critical 7.2K SFF SC 1-year Warranty HDD | 832514-B21 |

Midline 6G SATA - SFF Drives

| | |
|--|------------|
| HPE 2TB SATA 6G Business Critical 7.2K SFF SC 1-year Warranty 512e HDD | 765455-B21 |
| HPE 1TB SATA 6G Business Critical 7.2K SFF SC 1-year Warranty HDD | 655710-B21 |

Midline - 12G SAS - LFF Drives

| | |
|---|------------|
| HPE 20TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e ISE Multi Vendor HDD | P53552-B21 |
| HPE 18TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e ISE Multi Vendor HDD | P37664-B21 |
| HPE 16TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e ISE Multi Vendor HDD | P23863-B21 |
| HPE 14TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e Multi Vendor HDD | P09153-B21 |
| HPE 12TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e Multi Vendor HDD | 881779-B21 |
| HPE 10TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty 512e ISE Multi Vendor HDD | P53558-B21 |



Core Options

| | |
|---|------------|
| HPE 8TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty 512e Multi Vendor HDD | 819201-B21 |
| HPE 6TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty 512e Multi Vendor HDD | 861754-B21 |
| HPE 4TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Multi Vendor HDD | 872487-B21 |
| HPE 2TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Multi Vendor HDD | 872485-B21 |

Midline - 6G SATA - LFF Drives

| | |
|---|------------|
| HPE 20TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e ISE Multi Vendor HDD | P53555-B21 |
| HPE 18TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e ISE Multi Vendor HDD | P37673-B21 |
| HPE 16TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e ISE Multi Vendor HDD | P23857-B21 |
| HPE 14TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e Multi Vendor HDD | P09163-B21 |
| HPE 12TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e Multi Vendor HDD | 881785-B21 |
| HPE 10TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty 512e ISE Multi Vendor HDD | P53559-B21 |
| HPE 8TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty 512e Multi Vendor HDD | 819203-B21 |
| HPE 6TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty 512e Multi Vendor HDD | 861750-B21 |
| HPE 4TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Multi Vendor HDD | 872491-B21 |
| HPE 2TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Multi Vendor HDD | 872489-B21 |
| HPE 1TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Multi Vendor HDD | 861691-B21 |

HPE Solid State Drives

For SSD selection guidance, please visit <https://ssd.hpe.com/>

For SSDs with optimal product availability, HPE advocates SSDs from the list located here:

Read Intensive - 24G SAS - SFF – Basic Carrier Solid State Drives (Only for use with Broadcom MegaRAID)

| | |
|--|------------|
| HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD | P49045-B21 |
|--|------------|

Notes: Basic Carrier drives support on 8SFF Basic Carrier CTO Server only

Read Intensive - 12G SAS - SFF - Solid State Drives

| | |
|--|------------|
| HPE 15.36TB SAS 12G Read Intensive SFF SC Multi Vendor SSD | P49044-B21 |
| HPE 7.68TB SAS 12G Read Intensive SFF SC Multi Vendor SSD | P49039-B21 |
| HPE 3.84TB SAS 12G Read Intensive SFF SC Multi Vendor SSD | P49034-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF SC Multi Vendor SSD | P49030-B21 |
| HPE 960GB SAS 12G Read Intensive SFF SC Multi Vendor SSD | P49028-B21 |

Read Intensive - 12G SAS -LFF - Solid State Drives

| | |
|--|------------|
| HPE 7.68TB SAS 24G Read Intensive LFF SCC Multi Vendor SSD | P49038-B21 |
|--|------------|

Mixed Use - 12G SAS - SFF – Basic Carrier Solid State Drives (Only for use with Broadcom MegaRAID)

| | |
|---|------------|
| HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD | P40508-B21 |
| HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD | P40512-B21 |
| HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD | P40511-B21 |
| HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD | P40507-B21 |
| HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD | P40510-B21 |

Notes: Basic Carrier drives support on 8SFF Basic Carrier CTO Server only

Mixed Use - 12G SAS - SFF - Solid State Drives (Only for use with Broadcom MegaRAID)

| | |
|---|------------|
| HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD | P49057-B21 |
| HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD | P49053-B21 |
| HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD | P49049-B21 |



Core Options

HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD P49047-B21

Notes: Basic Carrier drives support on 8SFF Basic Carrier CTO Server only

Read Intensive - 12G Value SAS - SFF - Solid State Drives

HPE 7.68TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD P37003-B21

HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD P49035-B21

HPE 3.84TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD P37001-B21

HPE 1.92TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD P36999-B21

HPE 960GB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD P36997-B21

Mixed Use - 12G Value SAS - SFF - Solid State Drives

HPE 3.84TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD P37017-B21

HPE 1.92TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD P37011-B21

HPE 960GB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD P37005-B21

Mixed Use - 12G SAS - SFF - Solid State Drives

HPE 6.4TB SAS 12G Mixed Use SFF SC Multi Vendor SSD P49056-B21

HPE 3.2TB SAS 12G Mixed Use SFF SC Multi Vendor SSD P49052-B21

HPE 1.6TB SAS 12G Mixed Use SFF SC Multi Vendor SSD P49048-B21

HPE 800GB SAS 12G Mixed Use SFF SC Multi Vendor SSD P49046-B21

Read Intensive – 6G SATA – SFF Basic Carrier Self-encrypting Solid State Drives

HPE 1.92TB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD P58240-B21

HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD P58236-B21

Read Intensive – 6G SATA - SFF – Basic Carrier - Solid State Drives (Only for use with Braodcom MegaRAID)

HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40500-B21

HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40499-B21

HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40498-B21

HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40497-B21

HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD P40496-B21

Notes: Basic Carrier drives support on 8SFF Basic Carrier CTO Server only

Read Intensive – 6G SATA - SFF - Solid State Drives

HPE 7.68TB SATA 6G Read Intensive SFF SC Multi Vendor SSD P18430-B21

HPE 3.84TB SATA 6G Read Intensive SFF SC PM893 SSD P47813-B21

HPE 3.84TB SATA 6G Read Intensive SFF SC Multi Vendor SSD P18428-B21

HPE 1.9TB SATA 6G Read Intensive SFF SC PM893 SSD P47812-B21

HPE 1.92TB SATA 6G Read Intensive SFF SC Multi Vendor SSD P18426-B21

HPE 960GB SATA 6G Read Intensive SFF SC PM893 SSD P47811-B21

HPE 960GB SATA 6G Read Intensive SFF SC Multi Vendor SSD P18424-B21

HPE 480GB SATA 6G Read Intensive SFF SC PM893 SSD P47810-B21

HPE 480GB SATA 6G Read Intensive SFF SC Multi Vendor SSD P18422-B21

HPE 240GB SATA 6G Read Intensive SFF SC Multi Vendor SSD P18420-B21



Core Options

Very Read Intensive – 6G SATA – SFF – Basic Carrier Solid State Drives (Only for use with Broadcom MegaRAID)

HPE 7.68TB SATA 6G Very Read Optimized SFF BC 5400 SSD P58228-B21

Notes: Basic Carrier drives support on 8SFF Basic Carrier CTO Server only

Mixed Use – 6G SATA – SFF Basic Carrier Self-encrypting Solid State Drives

HPE 1.92TB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD P58248-B21

HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD P58244-B21

Mixed Use – 6G SATA - SFF – Basic Carrier Solid State Drives (Only for use with Broadcom MegaRAID)

HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD P40505-B21

HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD P40504-B21

HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD P40503-B21

HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD P40502-B21

Notes: Basic Carrier drives support on 8SFF Basic Carrier CTO Server only

Mixed Use – 6G SATA - SFF - Solid State Drives

HPE 3.84TB SATA 6G Mixed Use SFF SC Multi Vendor SSD P18438-B21

HPE 1.92TB SATA 6G Mixed Use SFF SC PM897 SSD P47816-B21

HPE 1.92TB SATA 6G Mixed Use SFF SC Multi Vendor SSD P18436-B21

HPE 960GB SATA 6G Mixed Use SFF SC PM897 SSD P47815-B21

HPE 960GB SATA 6G Mixed Use SFF SC Multi Vendor SSD P18434-B21

HPE 480GB SATA 6G Mixed Use SFF SC PM897 SSD P47814-B21

HPE 480GB SATA 6G Mixed Use SFF SC Multi Vendor SSD P18432-B21

Read Intensive - PCIe/NVMe - SFF - Solid State Drives

HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD P51456-B21

HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD P50220-B21

HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD P47825-B21

HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD P64890-B21

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD P51454-B21

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD P50217-B21

HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD P47824-B21

HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD P64882-B21

HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF SCN Self-encrypting FIPS U.3 CM6 SSD P44580-B21

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN U.2 P5520 SSD P51452-B21

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN U.3 PM1733a SSD P50214-B21

HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 Multi Vendor SSD P47823-B21

HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF SCN U.2 V2 Multi Vendor SSD P64874-B21

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF SCN Self-encrypting FIPS U.3 CM6 SSD P44572-B21



Core Options

Mixed Use - PCIe/NVMe - SFF - Solid State Drives

| | |
|---|------------|
| HPE 12.8TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735 SSD | P22274-B21 |
| HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD | P51462-B21 |
| HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD | P50231-B21 |
| HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD | P47822-B21 |
| HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD | P64886-B21 |
| HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD | P51460-B21 |
| HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD | P50228-B21 |
| HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD | P47821-B21 |
| HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF SCN Self-encrypting FIPS U.3 CM6 SSD | P44596-B21 |
| HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD | P64878-B21 |
| HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN U.2 P5620 SSD | P51458-B21 |
| HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN U.3 PM1735a SSD | P50225-B21 |
| HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 Multi Vendor SSD | P47820-B21 |
| HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF SCN U.2 V2 Multi Vendor SSD | P64870-B21 |
| HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF SCN Self-encrypting FIPS U.3 CM6 SSD | P44588-B21 |

Write Intensive- PCIe/NVMe - SFF - Solid State Drives

| | |
|---|------------|
| HPE 750GB NVMe Gen3 High Performance Low Latency Write Intensive SFF SCN U.2 P4800X SSD | P06952-B21 |
|---|------------|

Notes: NVMe SSDs not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations.

Read Intensive – 6G SATA – M.2 UFF to SFF - Solid State Drives

| | |
|---|------------|
| HPE Dual 480GB SATA 6G Read Intensive M.2 to SFF SCM Multi Vendor SSD | P47819-B21 |
|---|------------|

Notes: SCM dual drive functionality only supported on HPE DL360 Gen10 1SFF SAS/SATA Rear Backplane (867972-B21) or HPE DL360 Gen10 2SFF SATA UFF Backplane Kit (867970-B21). Installation on any other bay will only show one M.2 drive per bay.

Read Intensive – 6G SATA - M.2 - Solid State Media (2280 type)

| | |
|---|------------|
| HPE 480GB SATA 6G Read Intensive M.2 Multi Vendor SSD | P47818-B21 |
| HPE 240GB SATA 6G Read Intensive M.2 Multi Vendor SSD | P47817-B21 |

Internal - 6G SATA - Dual M.2 Enabling Kits

| | |
|---|------------|
| HPE Universal SATA 6G AIC HHHL M.2 SSD Enablement Kit | 878783-B21 |
|---|------------|

Notes: The Universal SATA M.2 Kit above will require a PCIe slot and support up to two of the same M.2 media cards.

| | |
|---|------------|
| HPE DL360 Gen10 SATA M.2 2280 Riser Kit | 867978-B21 |
|---|------------|

Notes: The DL360 SATA M.2 Riser Kit above is part of the Primary Riser so it will not take up a PCIe slot and will support up to two of the same 2280 M.2 media cards.

Mixed Use - 12G Value SAS - LFF - Solid State Drives

| | |
|---|------------|
| HPE 1.92TB SAS 12G Mixed Use LFF SCC Value SAS Multi Vendor SSD | P37013-B21 |
|---|------------|

Mixed Use – 6G SATA - LFF - Solid State Drives

| | |
|---|------------|
| HPE 960GB SATA 6G Mixed Use LFF SCC Multi Vendor SSD | P47419-B21 |
| HPE 480GB SATA 6G Read Intensive LFF SCC Multi Vendor SSD | P47807-B21 |

Hard Drive Blank Kits

| | |
|--|------------|
| HPE Large Form Factor Hard Drive Blank Kit | 666986-B21 |
| HPE Small Form Factor Hard Drive Blank Kit | 666987-B21 |



Core Options

HPE Smart IO

Pensando Distributed Services Card (DSC)

Pensando Distributed Services Platform DSC-25 Enterprise 10/25Gb 2-port SFP28 Card P26966-B21

Requirements:

- High Performance Fan Kit (871244-B21) is required.
- One 3yr/4yr/5yr Silver or 3yr/4yr/5yr Platinum license must be purchased for every DSC-25 card in a server.
- 1yr Silver, 1yr Platinum licenses are reserved for renewals only.

Notes:

- DSC card must be installed in slot 1 when used in combination with ALOM Module for iLO Management.
- Each card instance requires one RTU license of Silver or Platinum software. In case of more than one adapter, RTU licenses doesn't need to be of the same part number.

Pensando Distributed Services Platform for HPE iLO Sideband Management Adaptive LOM Module P26969-B21

Pensando DSP Silver Software Licenses

Pensando Distributed Services Platform Enterprise 1-year Renewal Subscription 24x7 Support E-RTU R6A06AAE

Pensando Distributed Services Platform Enterprise 3-year Subscription 24x7 Support E-RTU R6A07AAE

Pensando Distributed Services Platform Enterprise 4-year Subscription 24x7 Support E-RTU R6F68AAE

Pensando Distributed Services Platform Enterprise 5-year Subscription 24x7 Support E-RTU R6A08AAE

Pensando DSP Platinum Software Licenses

Pensando Distributed Services Platform Enterprise Pro 1-year Renewal Subscription 24x7 Support E-RTU R6A09AAE

Pensando Distributed Services Platform Enterprise Pro 3-year Subscription 24x7 Support E-RTU R6A10AAE

Pensando Distributed Services Platform Enterprise Pro 4-year Subscription 24x7 Support E-RTU R6F69AAE

Pensando Distributed Services Platform Enterprise Pro 5-year Subscription 24x7 Support E-RTU R6A11AAE

HPE Networking

100 Gigabit Ethernet adapters

HPE Ethernet 100Gb 1-port QSFP28 MCX515A-CCAT Adapter 874253-B21

25 Gigabit Ethernet adapters

Mellanox MCX512F-ACHT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE P13188-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

HPE Ethernet 10/25Gb 2-port SFP28 MCX4121A-ACUT Adapter 817753-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

HPE Ethernet 10/25Gb 2-port SFP28 BCM57414 Adapter 817718-B21

Notes:

- Alternative to FlexLOM requirement on Network Choice (NC) chassis
- PXE boot not supported on Legacy Mode
- Legacy FIO Mode (758959-B22) not supported with this option on the Network Choice (NC) Configure-to-Order (CTO) chassis. The selection of this networking option and Legacy FIO Mode on an NC chassis requires an additional networking option without the Legacy FIO mode restriction.



Core Options

HPE Ethernet 10/25Gb 2-port SFP28 QL41401-A2G Adapter 867328-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE P08443-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE P08458-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

If quantity 2 is selected then riser P23271-B21 HPE DL360 Gen10 2P FH GPU Enablement v2 Kit must be selected

10 Gigabit Ethernet adapters

HPE Ethernet 10Gb 2-port SFP+ BCM57414 Adapter P08421-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

HPE Ethernet 10Gb 2-port BASE-T X550-AT2 Adapter 817738-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

HPE Ethernet 10Gb 2-port SFP+ X710-DA2 Adapter 727055-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

HPE Ethernet 10Gb 2-port BASE-T BCM57416 Adapter 813661-B21

Notes:

- Alternative to FlexLOM requirement on Network Choice (NC) chassis
- PXE boot not supported on Legacy Mode
- Legacy FIO Mode (758959-B22) not supported with this option on the Network Choice (NC) Configure-to-Order (CTO) chassis. The selection of this networking option and Legacy FIO Mode on an NC chassis requires an additional networking option without the Legacy FIO mode restriction.

HPE Ethernet 10Gb 2-port SFP+ 57810S Adapter 652503-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

HPE Ethernet 10Gb 2-port SFP+ QL41401-A2G Adapter P08446-B21

Notes:

- Alternative to FlexLOM requirement on Network Choice (NC) chassis
- PXE boot not supported on Legacy Mode
- Legacy FIO Mode (758959-B22) not supported with this option on the Network Choice (NC) Configure-to-Order (CTO) chassis. The selection of this networking option and Legacy FIO Mode on an NC chassis requires an additional networking option without the Legacy FIO mode restriction.

HPE Ethernet 10Gb 2-port BASE-T 57810S Adapter 656596-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

HPE Ethernet 10Gb 2-port BASE-T QL41401-A2G Adapter 867707-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

1 Gigabit Ethernet adapters

HPE Ethernet 1Gb 4-port BASE-T I350-T4V2 Adapter 811546-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

If quantity 2 is selected then riser P23271-B21 HPE DL360 Gen10 2P FH GPU Enablement v2 Kit must be selected

HPE Ethernet 1Gb 4-port BASE-T BCM5719 Adapter 647594-B21

Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis

If quantity 2 is selected then riser P23271-B21 HPE DL360 Gen10 2P FH GPU Enablement v2 Kit must be selected



Core Options

| | |
|---|------------|
| HPE Ethernet 1Gb 2-port BASE-T BCM5720 Adapter | 615732-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| FlexibleLOM Adapters | |
| HPE Ethernet 10/25Gb 2-port FLR-SFP28 MCX4121A-ACFT Adapter | 817749-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter | 817709-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE Ethernet 10/25Gb 2-port FLR-SFP28 QL41401-A2G Converged Network Adapter | 867334-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE Ethernet 10Gb 2-port FLR-SFP+ BCM57414 Adapter | P08440-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE Ethernet 10Gb 2-port FLR-SFP+ X710-DA2 Adapter | 727054-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE Ethernet 10Gb 2-port FLR-T X550-AT2 Adapter | 817745-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE FlexFabric 10Gb 4-port FLR-T 57840S Adapter | 764302-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter | 817721-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE FlexFabric 10Gb 2-port FLR-SFP+ 57810S Adapter | 700751-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE FlexFabric 10Gb 2-port FLR-T 57810S Adapter | 700759-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE Ethernet 1Gb 4-port FLR-T BCM5719 Adapter | 629135-B22 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |
| HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 Adapter | 665240-B21 |
| Notes: Alternative to FlexLOM requirement on Network Choice (NC) chassis | |

HPE InfiniBand

| | |
|--|------------|
| HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe3 x16 MCX653105A-HDAT Adapter | P06154-B21 |
| Notes: Must be paired with HPE IB HDR PCIe G3 Aux Card W/ Cbl (P06154-B23) | |
| HPE InfiniBand HDR PCIe3 Auxiliary Card with 350mm Cable Kit | P06154-B23 |
| HPE InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter | 872726-B21 |
| HPE InfiniBand HDR100/Ethernet 100Gb 2-port QSFP56 PCIe3 x16 MCX653106A-ECAT Adapter | P06251-B21 |
| HPE InfiniBand HDR100/Ethernet 100Gb 1-port QSFP56 PCIe3 x16 MCX653105A-ECAT Adapter | P06250-B21 |
| HPE InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter | 879482-B21 |
| HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel Omni-Path Architecture Adapter | 829335-B21 |
| Notes: For additional InfiniBand information: https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154440 | |

Core Options

European Union Erp Lot 9 Regulation

Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.

HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

HPE Power Supplies

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [HPE power cords and cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#). For information on power specifications and technical content visit [HPE Flexible Slot power supplies](#).

HPE Flex Slot Platinum Hot-plug Power supplies

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 830272-B21

Notes: 1600W Power supplies only support high line voltage (200 VAC to 240 VAC).

HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit P03178-B21

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865414-B21

HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit 865438-B21

HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit 865434-B21

HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit 865428-B21

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865408-B21

Notes: According to The Bureau of Indian Standards Act, 2016, BIS certification is required by every manufacturer (Indian or foreign) of those who are manufacturing products under Compulsory Certification. DL360 Gen10 CTO Servers manufactured in Singapore with below Power Supplies are certified with BIS: 865408-B21, P38995-B21, P03178-B21, P865434-B21, P865438-B21, and P38997-B21.

For information on BIS Certification requirement visit [BIS Certification - BIS Certificate for Import \(indianchemicalregulation.com\)](#)

HPE Computation and Graphics Accelerators

NVIDIA A2 16GB PCIe Non-CEC Accelerator for HPE R9H23C

Notes: Requires High Performance Fan kit (871244-B21)

NVIDIA T4 16GB Computational Accelerator for HPE ROW29C

Notes: Requires High Performance Fan kit (871244-B21)

HPE DL360 Gen10 GPU CPU1 v2 Cable Kit P23272-B21

Notes: Replaces 871248-B21. Enhanced to support additional GPUs and compatible with all GPUs qualified on DL360 Gen10.



Core Options

GPGPU Information

| HPE DL360 Configuration* | | | | | | | | | | |
|--------------------------|---|--------------|--|------|------|--|---|---|-----------------------------|-------------------------------|
| Part number | Card | Qty supp. | Processor supported | PCIe | 4LFF | 8SFF | 8+2SFF SAS/ SATA/ Dual M.2 ¹ | 8+2SFF SAS/ SATA/ Dual M.2 ² | 8+2SFF NVMe ³ | 10SFF Premium ⁴ |
| Q9B37C | Intel Arria 10GX FPGA Accelerator | 2 | 1 st & 2 nd Gen | Gen3 | 35C | 35C | ≤25C | ≤30C | ≤30C | ≤30C |
| R2U55C | NVIDIA Quadro P2200 GPU Module | 2 | 2 nd Gen | Gen3 | 35C | 35C | 35C | 35C | 35C | 35C |
| R1F95C | NVIDIA Quadro RTX4000 GPU Module | 2 | 2 nd Gen | Gen3 | 35C | 35C | 25C/30C* | 30C/35C* | 25C/30C* | 35C ⁵ |
| R0W29C ⁴ | NVIDIA Tesla T4 16GB Module | 2 | 1 st & 2 nd Gen | Gen3 | 30C | 30C | Not Supp. | 20C | 20C | 20C |
| R9H23C ⁴ | NVIDIA A2 GPU Accelerator | 2 | 2 nd Gen | Gen3 | 30C | 20C (STD fan) 30C (perf. fan) | Not Supp. | 25C | 25C | 30C |

Notes:

- The 2nd digit of the processor model number “x1xx” and “x2xx” is used to denote the processor generation (i.e. 1=1st generation and 2=2nd generation)
- When NVMe drives are installed you will be limited to Slot 1 only for any Accelerator module.
- Requires increased cooling to be selected in BIOS settings
- ¹ - With standard system fans
- ² - With High Performance system fans
- ³ - Requires high performance fans with 2SFF NVMe configuration.
- ⁴ - Requires high performance fans (Note these ship standard on 10SFF models).
- ⁵ - Limited to 1 GPU
- There is no Energy Star certification with Graphic cards.
- *For information on obsolete P2000 & P4000 GPUs please visit [HPE DL360 Gen10 QuickSpecs version 37](#)

Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

Embedded Management

HPE iLO Advanced

| | |
|--|------------|
| HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features | 512485-B21 |
| HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features | 512486-B21 |
| HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features | 512487-B21 |
| HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features | BD505A |
| HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features | BD506A |
| HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features | BD507A |
| HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features | E6U59ABE |
| HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features | E6U64ABE |

Software as a Service Management

HPE GreenLake for Compute Ops Management

| | |
|--|----------|
| HPE GreenLake for Compute Ops Management Enhanced 3-year Upfront ProLiant SaaS | R7A11AAE |
|--|----------|

Additional Options

| | |
|--|----------|
| HPE GreenLake for Compute Ops Management Enhanced 1-year Upfront ProLiant SaaS | R7A10AAE |
| HPE GreenLake for Compute Ops Management Enhanced 5-year Upfront ProLiant SaaS | R7A12AAE |

Notes: For customers purchasing HPE GreenLake for Compute Ops Management, without a hardware purchase or a BTO purchase, use this base SKU within ASQ order:

| | |
|--|----------|
| HPE GreenLake for Compute Ops Management Base SaaS | R6Z73AAE |
|--|----------|

HPE iLO Common Password Setting

| | |
|-------------------------------------|------------|
| HPE iLO Common Password FIO Setting | P08040-B21 |
|-------------------------------------|------------|

Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services

HPE Converged Infrastructure Management Software

HPE OneView Advanced (with HPE iLO Advanced)

| | |
|--|----------|
| HPE OneView including 3yr 24x7 Support Physical 1-server LTU | E5Y34A |
| HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU | E5Y35AAE |

HPE OneView Advanced (without HPE iLO Advanced)

| | |
|--|----------|
| HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU | P8B24A |
| HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU | P8B25A |
| HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU | P8B26AAE |



Additional Options

Notes:

- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>
- Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.
- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>

HPE Security

HPE Trusted Supply Chain for HPE ProLiant

P36394-B21

Notes:

- HPE Trusted Supply Chain (P36394-B21) is an optional security upgrade intended for agencies and regulated industries with enhanced security and compliance needs. Applying this option to a DL360 Gen10 CTO server ensures it is built in the USA in a secured facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. The HPE ProLiant DL360 Gen10 server is re-branded as a HPE ProLiant DL360T Gen10 to denote the HPE Trusted Supply Chain security enhancements. The DL360T Gen10 is currently supported in the USA, exclusively, and is Trade Agreement Act (TAA) compliant. See "HPE Security" section within this document for more detail and learn more at <http://www.hpe.com/security>.
- This option requires the selection of HPE Gen10 Intrusion Detection Kit (867984-B21)
- This option requires the selection of either HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features (BD505A) or HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features (512485-B21)
- This option is limited to stand-alone DL360 Gen10 CTO servers only. The HPE Trusted Supply Chain configuration will not be available if the server is ordered as factory integrated into a rack
- One instance of the following Electronic License to Use is required per order (not per server): R6X85AAE - HPE Trusted Supply Chain E-LTU
- Logistics delivery speeds and services are available and selectable within Next Gen Quoter.
- This option cannot be selected with TAA CTO Models

HPE 1U Gen10 Bezel Kit

867998-B21

HPE Bezel Lock Kit

875519-B21

Notes: Requires bezel kit (867998-B21).

HPE DL360 Gen10 Chassis Intrusion Detection Kit

867984-B21

Notes: This provides a physical connection from the chassis board and hood and detects any physical intrusion into the chassis, providing security during the entire supply chain process of shipping, receiving, distribution, and operation.

HPE Trusted Platform Module 2.0 Gen10 Option

864279-B21

Notes:

- HPE Trusted Platform Module 2.0 option works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants.
- HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

HPE Gen10 TPM 1.2 FIO Setting

872108-B21

Notes: This is a FIO setting to allow the TPM 2.0 module to operate in a TPM 1.2 mode



Additional Options

HPE Storage Options

Emulex Fibre Channel HBAs

| | |
|---|--------|
| HPE SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter | Q0L13A |
| HPE SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter | Q0L14A |
| HPE SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter | Q0L11A |
| HPE SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter | Q0L12A |
| HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter | R2J62A |
| HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter | R2J63A |

QLogic Fibre Channel HBAs

| | |
|---|--------|
| HPE SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter | P9D93A |
| HPE SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter | P9D94A |
| HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter | R2E08A |
| HPE SN1600Q 32Gb Single Port Fibre Channel Host Bus Adapter | P9M75A |
| HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter | R2E09A |
| HPE SN1600Q 32Gb Dual Port Fibre Channel Host Bus Adapter | P9M76A |

Converged Network Adapter

| | |
|---|--------|
| HPE CN1300R 10/25Gb Dual Port Converged Network Adapter | Q0F09A |
| HPE CN1200R 10GBASE-T Converged Network Adapter | Q0F26A |

HPE Rack Options

Rail Kits

| | |
|--|------------|
| HPE 1U Gen10 SFF Easy Install Rail Kit | 874543-B21 |
| HPE 1U LFF Gen9 Easy Install Rail Kit | 789388-B21 |
| HPE 1U Cable Management Arm for Rail Kit | 734811-B21 |

Notes: Supports both the [Easy Install and Ball Bearing Rail Kits](#).

| | |
|--|------------|
| HPE 1U Gen10 SFF Ball Bearing Rail Kit | 872252-B21 |
| HPE 1U Gen10 LFF Ball Bearing Rail Kit | 879003-B21 |

Notes:

- HPE rail kits contain telescoping rails which allow for in-rack serviceability.
- Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

HPE Racks

- Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.
- Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.



Additional Options

HPE Power Distribution Units (PDUs)

- Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications. Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\)](#) web page.
- Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
- Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

HPE USB and SD Options

Notes: In vSphere 7.0, VMware made changes that impacted the usage of USB/SD Cards as standalone boot devices, and will be removing support for them with upcoming versions after 7.x.

SD Cards/USB media can still be used as a standalone boot option through all 7.x releases via published [Customer Advisory Usage of SD Card/USB Devices As Standalone Boot Devices Has Changed Due to System Storage Changes For VMware ESXi 7.0 \(Or Later\)](#).

For any major release beyond VMware ESXi 7.x, VMware will require M.2 or another local persistent device as the standalone boot option.

HPE Enterprise Mainstream Flash Media Kits for Memory Cards

| | |
|--|------------|
| HPE 32GB microSD RAID 1 USB Boot Drive | P21868-B21 |
| HPE 32GB microSD Flash Memory Card | 700139-B21 |

HPE Support Services

Installation & Start-up Services

| | |
|--|--------|
| HPE Install ProLiant DL3xx Service | U4506E |
| HPE Installation and Startup DL3xx Service | U4507E |

Tech Care


| | |
|---|--------|
| HPE 5 Year Tech Care Essential DL360 Gen10 Service | HS7U4E |
| HPE 5 Year Tech Care Essential wDMR DL360 Gen10 Service | HS7U9E |
| HPE 3 Year Tech Care Essential DL360 Gen10 Service | HS7U2E |
| HPE 3 Year Tech Care Essential wDMR DL360 Gen10 Service | HS7U7E |

Notes: For a full listing of support services available for this server, please visit <http://www.hpe.com/services>.



Memory

Memory Population guidelines

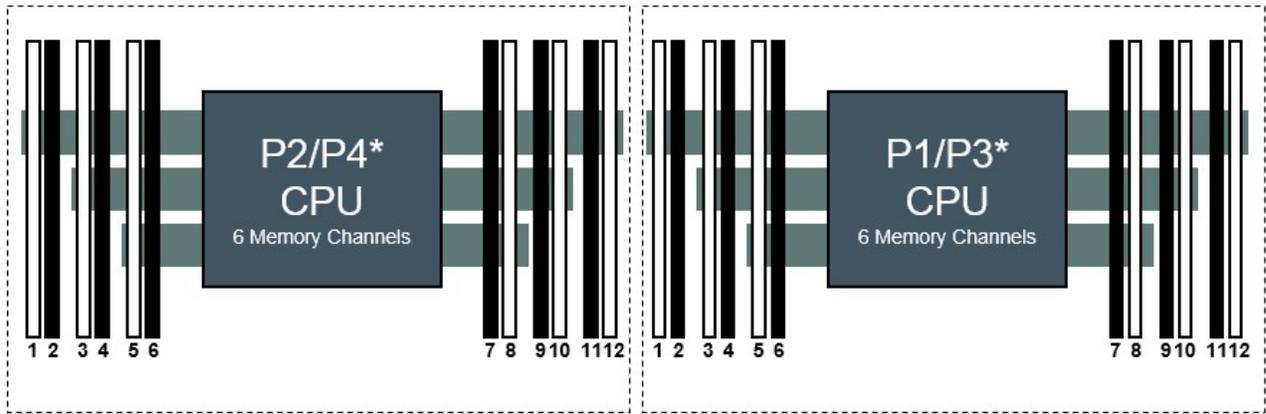

HPE Gen10 DL360 / DL380 / DL560

Notes:* Servers Front Server2 Slots per Channel

| HPE ProLiant Gen10 12 slot per CPU DIMM population order | | | | | | | | | | | |
|--|---|---|---|---|---|---|---|---|----|----|----|
| DIMM population order | | | | | | | | | | | |
| 1 DIMM | | | | | | | | 8 | | | |
| 2 DIMM s | | | | | | | | 8 | 10 | | |
| 3 DIMM s | | | | | | | | 8 | 10 | | 12 |
| 4 DIMM s | | | 3 | | 5 | | | 8 | 10 | | |
| 5 DIMM s | | | 3 | | 5 | | | 8 | 10 | | 12 |
| 6 DIMM s | 1 | | 3 | | 5 | | | 8 | 10 | | 12 |
| 7 DIMM s | 1 | | 3 | | 5 | 7 | | 8 | 10 | | 12 |
| 8 DIMM s | | | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | |
| 9 DIMM s | 1 | | 3 | | 5 | 7 | | 8 | 9 | 10 | 11 |
| 10 DIMM s | 1 | | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 12 |
| 11 DIMM s | 1 | | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| 12 DIMM s | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |


General Memory Population Rules and Guidelines

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit: <http://www.hpe.com/docs/memory-population-rules>
- To realize the performance memory capabilities listed in this document, HPE DDR4 Smart Memory is required. For additional information, please see the [HPE DDR4 Smart Memory QuickSpecs](#).

Notes: The maximum memory speed is a function of the memory type, memory configuration, and processor model
 For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>




Storage

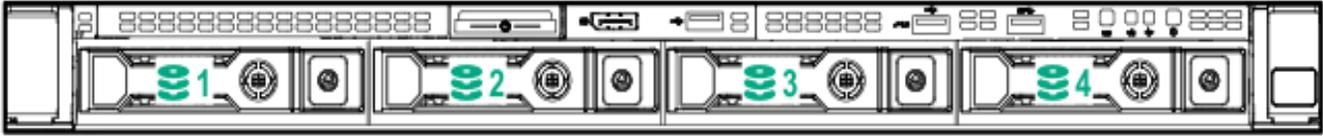

4 LFF device bay numbering




8 SFF + ODD device bay numbering

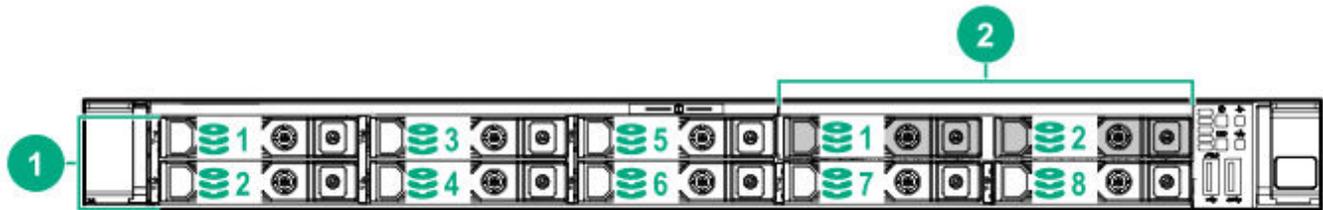

8 SFF + 2 SFF device bay numbering


Item Description

- 1 Bays 1-8
- 2 Bays 1 and 2

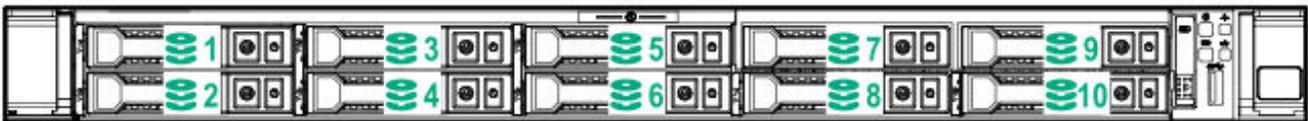

10 SFF NVMe/SAS backplane option device bay numbering

Notes: When the 10SFF NVMe/SAS backplane option is installed, bays 9 and 10 ONLY support NVMe Drives. The other bays support a mix of NVMe and SAS drives

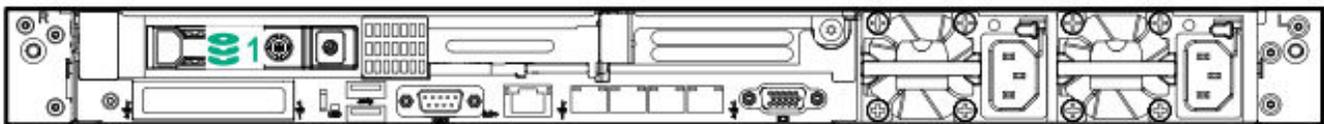

Optional rear device bay numbering

Notes:

- The optional rear device bay supports either 1 SFF drive or 1 Dual uFF (2x M.2 drives) in an HPE SmartCarrier M.2 (SCM).
- When the Dual uFF is installed, the M.2 drives are recognized as 101 and 102.
- Embedded 1Gb Ethernet 4-Port 331i Adapter shown above is not available on all models



Technical Specifications

System Unit

Dimensions (Height x Width x Depth)

SFF Drives

- 4.29 x 43.46 x 70.7 cm
1.69 x 17.11 x 27.83 in

LFF Drives

- 4.29 x 43.46 x 74.98 cm
1.69 x 17.11 x 29.5 in

Weight (approximate)

- **13.04 kg (28.74 lb)**
 - **SFF minimum:** One drive, one processor, one power supply, two heatsinks, one Smart Array controller, and five fans.
- **16.27 kg (35.86 lb)**
 - **SFF maximum:** 10 drives, two processors, two power supplies, two heatsinks, one Smart Array controller and seven fans.
- **13.77 kg (30.36 lb)**
 - **LFF minimum:** one drive, one processor, one power supply, two heatsinks, one Smart Array controller and five fans.
- **16.78 kg (37 lb)**
 - **LFF maximum:** Four drives, two processors, two power supplies, two heatsinks, one Smart Array controller and seven fans.

Input Requirements (per power supply)

Rated Line Voltage

- For 1600W (Platinum): 200-240 VAC
- For 1000W (Titanium): 100 to 240 VAC
- For 800W (Titanium) Power Supply: 200-240 VAC
- For 800W (Platinum): 100-240 VAC
- For 800W (Universal) Power Supply: 200-277 VAC
- For 800W (-48VDC): -40 Vdc to -72 Vdc
- 500W (Platinum) Power Supply: 100-240 VAC

BTU Rating

Maximum

- For 1600W (Platinum) Power Supply: 5918 BTU/hr (at 200 VAC), 5888 BTU/hr (at 220 VAC), 5884 BTU/hr (at 240 VAC)
- For 1000W (Titanium) Power Supply: 3741 BTU/hr (at 100 VAC), 3596 BTU/hr (at 200 VAC), 3582 BTU/hr (at 240 VAC)
- For 800W (Titanium) Power Supply: 2905 BTU/hr (at 200 VAC), 2899 BTU/hr (at 220 VAC), 2893 BTU/hr (at 240 VAC)
- For 800W (Platinum) Power Supply: 3067 BTU/hr (at 100 VAC), 2958 BTU/hr (at 200 VAC), 2949 BTU/hr (at 240 VAC)
- For 800W (Universal) Power Supply: 2964 BTU/hr (at 200 VAC), 2951 BTU/hr (at 230 VAC), 2936 BTU/hr (at 277 VAC)
- For 800W(-48Vdc) Power Supply: 2983 BTU/hr (at -40 Vdc), 2951 BTU/hr (at -48Vdc), 2912 BTU/hr (at -72Vdc)
- For 500W (Platinum) Power Supply: 1902 BTU/hr (at 100 VAC), 1840 BTU/hr (at 200 VAC), 1832 BTU/hr (at 240 VAC)



Technical Specifications

Power Supply Output (per power supply)

Rated Steady-State Power

- For 1600W (Platinum) Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
- For 1000W (Titanium) Power Supply: 1000W (at 100 VAC), 1000W (at 240 VAC), 1000W (at 240 VDC) input for China only
- For 800W (Titanium) Power Supply: 800W (at 200 VAC), 800W (at 240 VAC), 800W (at 240 VDC) for China only
- For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
- For 800W (Universal) Power Supply: 800W (at 200 VAC), 800W (at 277 VAC)
- For 800W (-48VDC) Power Supply: 800W (at -40 Vdc), 800W (at -72Vdc)
- For 500W (Platinum) Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VDC) input for China only

Maximum Peak Power

- For 1600W (Platinum) Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
- For 1000W (Titanium) Power Supply: 1000W (at 100 VAC), 1000W (at 240 VAC), 1000W (at 240 VDC) input for China only
- For 800W (Titanium) Power Supply: 800W (at 200 VAC), 800W (at 240 VAC), 800W (at 240 VDC) for China only
- For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
- For 800W (Universal) Power Supply: 800W (at 200 VAC), 800W (at 277 VAC)
- For 800W (-48VDC) Power Supply: 800W (at -40 Vdc), 800W (at -72Vdc)
- For 500W (Platinum) Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VDC) input for China only

System Inlet Temperature

- **Standard Operating Support**

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae>

- **Extended Ambient Operating Support**

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

- **Non-operating**

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

Relative Humidity (non-condensing)

- **Operating**

8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

- **Non-operating**

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.



Technical Specifications

Altitude

- **Operating**
3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
- **Non-operating**
9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Emissions Classification (EMC)

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

HPE Smart Array

For latest information on **HPE Smart Array Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers**, please refer to their QuickSpecs. (E208i-a,E208i-p,E208e-p,P408i-a,P408i-p,P408e-p,P816i-a)

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

| Configuration SKU | Entry | Base | Performance |
|-------------------|--------|--------|-------------|
| Idle | | | |
| LWAd | 5.1 B | 5.1 B | 5.2 B |
| LpAm | 35 dBA | 35 dBA | 36 dBA |
| Operating | | | |
| LWAd | 5.3 B | 5.2 B | 5.9 B |
| LpAm | 36 dBA | 38 dBA | 45 dBA |

Notes: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs** in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the **Hewlett Packard Enterprise web site**. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.



Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|---|
| 05-Sep-2023 | Version 64 | Changed | Optional Options, Additional Options and Standard Features were updated. |
| 05-Jun-2023 | Version 63 | Changed | Core Options, Standard Features and Technical Specifications were updated. |
| 01-May-2023 | Version 62 | Changed | Optional Options and Additional Options sections were updated. |
| 13-Mar-2023 | Version 61 | Changed | Pre-configured Models |
| 10-Jan-2023 | Version 60 | Changed | Core Options section was updated. Obsolete SKUs were removed. |
| 05-Dec-2022 | Version 59 | Changed | Core Options section was updated. Obsolete SKUs were removed. |
| 21-Nov-2022 | Version 58 | Changed | Update Pre-Configured Models, Configuration Informaion, Core Options |
| 06-Sep-2022 | Version 57 | Changed | Overview, Pre-Configured Models, Core Options and Configuration Information sections were updated. Obsolete SKUs were removed. |
| 01-Aug-2022 | Version 56 | Changed | Overview, Pre-Configured Models, Core Options and Configuration Information sections were updated. Obsolete SKUs were removed. |
| 05-Jul-2022 | Version 55 | Changed | Standard Features section was updated. Obsolete SKUs were removed. |
| 06-Jun-2022 | Version 54 | Changed | Configuration Information , Pre-Configured Models and Core Options sections were updated. Obsolete SKUs were removed. |
| 02-May-2022 | Version 53 | Changed | Core Options section was updated. Obsolete SKUs were removed |
| 07-Feb-2022 | Version 52 | Changed | Core Options section was updated. Obsolete SKUs were removed |
| 13-Dec-2021 | Version 51 | Changed | Additional Options section was updated. |
| 06-Dec-2021 | Version 50 | Changed | Additional Options section was updated. Obsolete SKUs were removed |
| 01-Nov-2021 | Version 49 | Changed | Configuration Information, Core Options, Service and Support, and Technical Specifications sections were updated. Obsolete SKUs were removed |
| 07-Sep-2021 | Version 48 | Changed | Core Options section was updated. Obsolete SKUs were removed |
| 02-Aug-2021 | Version 47 | Changed | Configuration Information, Core Options and Technical Specifications sections were updated. |
| 06-Jul-2021 | Version 46 | Changed | Overview, re-Configured Models, Configuration Information, Core Options and additional Options sections were updated. Obsolete SKUs were removed. |
| 07-Jun-2021 | Version 45 | Changed | Configuration Information section was updated. Obsolete SKUs were removed |
| 06-Apr-2021 | Version 44 | Changed | Overview, Configuration Information, Service and Support, Core Options and additional Options sections were updated. Obsolete SKUs were removed. |
| 01-Mar-2021 | Version 43 | Changed | Overview, Configuration Information and Core Options sections were updated. Obsolete SKUs were removed. Added HPE Trusted Supply Chain/HPE ProLiant DL360T Gen10. |
| 01-Feb-2021 | Version 42 | Changed | Overview, Pre-Configured Models, Standard Features and Core Options sections were updated. Obsolete SKUs were removed. Added new Read Intensive, Mixed Use & Write Intensive SAS SSDs Added 18TB SAS & SATA drives |

Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|--|
| 04-Jan-2021 | Version 41 | Changed | Overview and Pre-Configured Models sections were updated. Added four new Pre-Configured Models. Obsolete SKUs were removed. |
| 07-Dec-2020 | Version 40 | Changed | Overview, Pre-Configured Models and Core Options sections were updated. Obsolete SKUs were removed. Added support for 32GB Single Rank x4 DDR4-2933 Registered Smart Memory Added new NVMe RI & MU Value SAS SSD SKUs |
| 02-Nov-2020 | Version 39 | Changed | Overview, Pre-Configured Models, Core Options and Additional Options sections were updated. New Pre-Configured Models with 10GbE NICs were added. Full Pre-Configured Models SKUs are now listed. Obsolete SKUs were removed. |
| 05-Oct-2020 | Version 38 | Changed | Overview, Standard Features, Pre-Configured Models, Configuration Information and Core Options sections were updated. Added HPE NS204i-p NVMe PCIe3 OS Boot Device. Added new NVMe RI & MU SCN SSD SKUs Updated 2nd Gen. Intel® Xeon® Scalable Refresh Processors chassis support. Obsolete SKUs were removed. |
| 08-Sep-2020 | Version 37 | Changed | Overview, Standard Features, Configuration Information and Core Options sections were updated. Updated Operating Systems and Virtualization Software section Obsolete SKUs were removed |
| 03-Aug-2020 | Version 36 | Changed | Overview, Pre-Configured Models, Core Options and Additional Options sections were updated. Added Pensando DSP for HPE iLO Management ALOM Module Added new NVMe RI & MU SSD SKUs Added SN1610E 32Gb Fibre Channel HBAs Obsolete SKUs were removed from the QuickSpecs. |
| 06-Jul-2020 | Version 35 | Changed | Standard Features, Additional Options and Core Options sections were updated. Renamed Network Interface Card descriptions to include chipset Corrected UPI link quantity for Gold 6xxx-R refresh processors |
| 15-Jun-2020 | Version 34 | Changed | Core Options section was updated. |
| 01-Jun-2020 | Version 33 | Changed | Overview, Configuration Information, Core Options, Standard Features and Additional Options sections were updated. Obsolete SKUs were removed |
| 06-Apr-2020 | Version 32 | Changed | Overview, Standard Features, Pre-Configured Models, Configuration Information, Core Options and Additional Options sections were updated. |
| 16-Mar-2020 | Version 31 | Changed | Standard Features, Configuration Information and Core Options sections were updated. |
| 24-Feb-2020 | Version 30 | Changed | Overview, Pre-Configured Models, Service and Support, Configuration Information, Core Options and Additional Options sections were updated. Additional 2nd Generation Intel® Xeon® Scalable Processors and pre-configured models powered by them were added. |



Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|--|
| 03-Feb-2020 | Version 29 | Changed | Overview, Standard Features, Core Options, Pre-configured Models and Configuration Information and Additional Options sections were updated. European Union (EU) Lot 9 regulation information was added. Obsolete SKUs were removed |
| 02-Dec-2019 | Version 28 | Changed | Overview, Pre-configured Models, Configuration Information, Core Options, Additional Options and Technical Specifications sections were updated. Obsolete SKUs were removed |
| 07-Oct-2019 | Version 27 | Changed | Overview, Pre-configured Models, Core Options, and Additional Options sections were updated. |
| 03-Sep-2019 | Version 26 | Changed | Overview, Standard Features, Pre-configured Models, SMB Models, China Specific, Configuration Information - Factory Integrated Models and Core Options sections were updated. |
| 12-Aug-2019 | Version 25 | Changed | Overview, Standard, Features, Optional Features, SMB Models, Configuration Information-Factory Integrated Models, China Specific, Core Options, Storage sections were updated. |
| 01-Jul-2019 | Version 24 | Changed | The 5218N wattage has changed from 105 to 110W TDP The U.S. version of QuickSpecs is no longer being updated, please reference the Worldwide QuickSpecs for latest information. |
| 03-Jun-2019 | Version 23 | Changed | Standard Features, SMB Models, Pre-configured Models, China Specific, Configuration Information, Additional Options and Core Options sections were updated. New SKUs were added and Obsolete SKUs were removed. |
| 15-Apr-2019 | Version 22 | Changed | Overview, Standard Features, SMB Models, Pre-configured Models, China Specific, Configuration Information and Core Options sections were updated. |
| 02-Apr-2019 | Version 21 | Changed | Overview, Standard Features and Pre-configured Models sections were updated. |
| 04-Feb-2019 | Version 20 | Changed | Overview, Standard Features, Configuration Information, Core Options and Optional Features sections were updated. |
| 03-Dec-2018 | Version 19 | Changed | Overview, Standard Features, Pre-configured Models, Core Options and Storage sections were Updated. |
| 15-Oct-2018 | Version 18 | Changed | SKUs descriptions were updated in Core Options section Obsolete SKUs were removed from Core Options section, |
| 01-Oct-2018 | Version 17 | Changed | Overview, Standard Features, Configuration Information, Core Options, Additional Options, and Memory sections were updated. SKU descriptions were updated. |
| 13-Aug-2018 | Version 16 | Changed | Maximum Storage and Additional Options were revised. |
| 06-Aug-2018 | Version 15 | Changed | Added new AMD and NVIDIA Graphics card options. Added new Smart Array P824i-p MR Gen10 (24 Internal Lanes/4GB Cache/CacheCade) 12G SAS PCIe Controller. Added new Solid State Drives offering. Pre-Configured Models, Core Options, and Additional Options were revised. Obsolete SKUs were removed from the QuickSpecs. |
| 11-Jun-2018 | Version 14 | Changed | Smart Buy Models section for the NA version was revised. |




Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|---|
| 04-Jun-2018 | Version 13 | Changed | New SSD offering was added to the HPE Drivers section. Core Options, Additional Options, and Memory were revised. Obsolete SKUs were removed from the QuickSpecs. |
| 07-May-2018 | Version 12 | Changed | New SMB models offering was added. Riser Information and power supply section were revised. Obsolete SKUs were removed from the QuickSpecs. |
| 02-Apr-2018 | Version 11 | Changed | Standard Features, Core Options and Additional Options were revised. Obsolete SKUs were removed from the QuickSpecs. |
| 05-Mar-2018 | Version 10 | Removed | Obsolete SKUs were removed from the QuickSpecs. |
| 05-Feb-2018 | Version 9 | Added | Added new SATA SSDs, NVMe drives and PCIe accelerator cards. |
| 18-Dec-2017 | Version 8 | Changed | Network controller under Configuration Information – Factory Integrated Models section was revised. |
| 04-Dec-2017 | Version 7 | Changed | Added new Entry level WW Model-1 sku. HPE Specific IST Processor offering Gold 6143 and Platinum 8165 bins were added. Added new High capacity 12TB LFF drives and Large capacity 15.3TB SSDs. Standard Features, Pre-configured Models, Core Options, Additional Options, Memory, and Acoustic Noise were revised. |
| 23-Oct-2017 | Version 6 | Changed | Memory speed table was updated to display the 61XX processors running at 2666MT/s. |
| 16-Oct-2017 | Version 5 | Changed | 128GB Memory was added Riser table was added under Core Options. Platform Information, Processors table under Standard Features, FlexibleLOM Adapters, GPU table under Core Options, HPE Storage Controllers, and Rail Kits were revised. |
| 25-Sep-2017 | Version 4 | Changed | New Gold Processors were added. Added new Hard Drive and SSD offering. GPU information table was added. Platform Information, Core Options, Additional Options, and Storage section were revised. Obsolete SKUs were removed from the QuickSpecs. |
| 14-Aug-2017 | Version 3 | Changed | Smart Buy Models section was revised (NA version only). |
| 07-Aug-2017 | Version 2 | Changed | Added new Solid State Drives offering to the HPE Drives section. Added Support Services under Additional Options. Platform Information, Optional Features, Core Options, Additional Options, Memory, and Storage section were revised. |
| 11-Jul-2017 | Version 1 | New | New QuickSpecs. |



Copyright

Make the right purchase decision.
Contact our presales specialists.

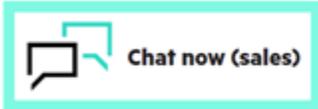

© Copyright 2023 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries. Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a00008159enw - 15929 - Worldwide - V64 - 05-September-2023