


X13DEG-R (For SuperServer Only)

Print

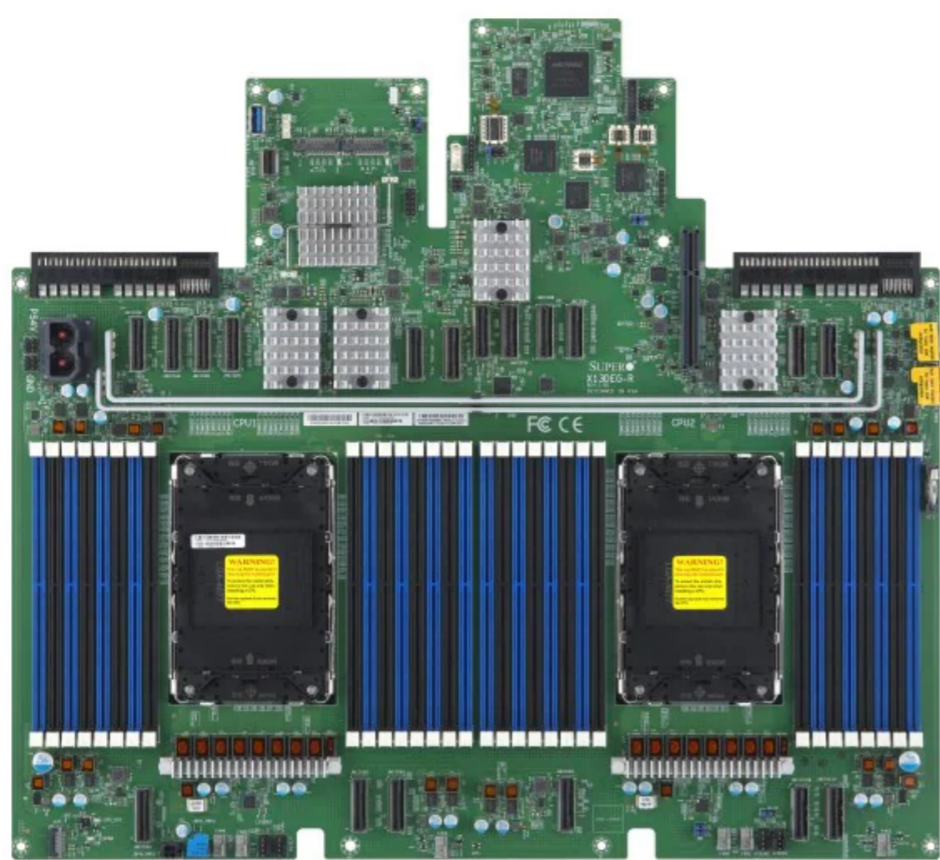

X13 2U LC Redstone Next

Key Features

1. 5th/4th Gen Intel® Xeon® Scalable processors and Intel® Xeon® Max series processors, Dual Sockets LGA-4677 (Socket E) supported, CPU TDP supports Up to 350W TDP
2. Intel® C741 Chipset
3. Up to 8TB 3DS ECC RDIMM, DDR5-5600MT/s in 32 DIMM slots
4. 18 PCIe 5.0 MCIO x8 (8 for GPU Module; 8 for Riser Card; 2 for NVMe)
5. Dual LAN with Intel X710 10GbE
6. 2 PCIe 3.0 x4 Hybrid M.2
7. 1 VGA via AOM Card
8. 4 SATA3 port s via SlimSAS-LP x4
9. 2 USB 3.0 via AOM Card + 1 USB 3.0 onboard

Optimized Servers

[SYS-221GE-TNHT-LCC](#)

[Contact Us](#)

[Specifications](#)
[Resources](#)
[Parts List](#)

Product SKUs

MBD-X13DEG-R

Physical Stats

Form Factor	Proprietary
Dimension	17.3" x 15.7" (44cm x 39.9cm)

Processor

CPU	5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors and Intel® Xeon® Max Series processors Dual Socket E supported, CPU TDP supports Up to 350W TDP
Core	Up to 64 cores

System Memory

Memory Capacity	32 DIMM slots Up to 8TB 3DS ECC RDIMM, DDR5-5600MT/s
Memory Type	5600/5200/4800/4400/4000 MT/s ECC DDR5 RDIMM (3DS) Up to 256GB of memory with speeds of up to 5600MT/s(1DPC) or 4400 MT/s (2DPC)
DIMM Sizes	8GB, 16GB, 32GB, 64GB, 128GB, 256GB RDIMM: Up to 256GB
Memory Voltage	1.1V
Error Detection	Corrects single-bit errors Detects double-bit errors (using ECC memory)

On-Board Devices

Chipset	Intel® C741
SATA	Intel® C741 controller for 4 SATA3 ports
IPMI	ASPEED AST2600 BMC
Network Controllers	AIOM for LAN

Input / Output

USB	1 USB 3.2 Gen1 port(s) (1 Type A)
TPM	1 TPM Header

Expansion Slots

PCIe	18 PCIe 5.0 x8 PCIe5.0 MCIO connector, 1 PCIe 5.0 x16 AIOM Slot
M.2	M.2 Interface: 2 PCIe 3.0 x4 Form Factor: 22110, 2280 Key: M-Key

System BIOS

BIOS Type	AMI 32MB AMI UEFI
BIOS Features	ACPI 6.4 SMBIOS 2.8/3.5 UEFI 2.8A Plug and Play (PnP) PCI FW 3.2

Management

Software	SuperCloud Composer , Supermicro Server Manager (SSM) , Supermicro Power Manager (SPM) , Supermicro Update Manager (SUM) , Supermicro SuperDoctor® 5 (SD5) , Super Diagnostics Offline (SDO) , Supermicro Thin-Agent Service (TAS) , SuperServer Automation Assistant (SAA) New! , Plug-ins for 3rd Party Software , IPMI Utilities
-----------------	---

PC Health Monitoring

Voltage	VBAT, System level control, Supports system management utility, Monitors CPU voltages, Chipset Voltage, Chassis intrusion header, +5V standby, +5V, +3.3V, +12V, Memory Voltages
LED	UID/Remote UID CPU / System Overheat LED
Temperature	Monitoring for CPU and chassis environment CPU thermal trip support PECI
FAN	Fan speed control
Other Features	UID, Node Manager Support, M.2 NGFF connector, Control of power-on for recovery from AC power loss, Chassis intrusion detection, ACPI power management

Operating Environment

Operating Temperature Range	10°C - 35°C (50°F - 95°F)
Non-Operating Temperature Range	-40°C - 60°C (-40°F - 140°F)
Operating Relative Humidity Range	8% - 90% (non-condensing)
Non Operating Relative Humidity Range	5% - 95% (non-condensing)

Certain products may not be available in your region

Global SKU English

About Us

- Company Profile
- Green Computing
- Investor Relations
- Careers
- Site Map
- Glossary

News

- Press Releases
- Supermicro in the News
- Product Reviews
- Events
- Webinars

Resources

- Product Briefs
- Solution Briefs
- Success Stories
- Videos
- White Papers
- Thought Leadership
- MySupermicro
- Data Center Stories

Connect & Follow

- Locations
- Contact Us
- Newsletter Sign-up

