


# X11SSH-CTF

---

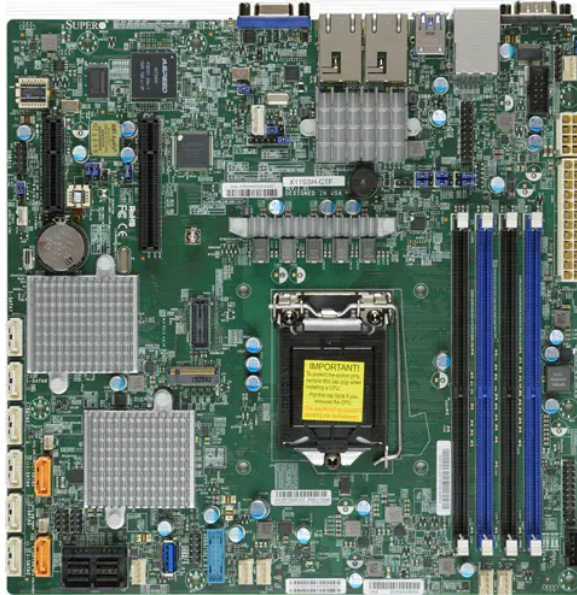

## Key Features

1. Single socket H4 (LGA 1151) supports Intel® Xeon® processor E3-1200 v6/v5, Intel® 7th/6th Gen. Core™ i3 series, Intel® Celeron® and Intel® Pentium®
2. Intel® C236 chipset
3. Up to 64GB Unbuffered ECC UDIMM DDR4 2400MHz; 4 DIMM slots
4. Expansion slots: 1 PCI-E 3.0 x8, 1 PCI-E 3.0 x2 (in x4)
5. M.2 NGFF connector  
**M.2 Interface:** SATA and PCI-E 3.0 x4  
Form Factor: 2260  
Key: M-Key
6. 8 SATA3 (6Gbps) via C236; RAID 0, 1, 5, 10
7. Dual 10GBase-T LAN with Intel® X550
8. 8 SAS3 (12Gbps) via Broadcom® 3008; RAID 0, 1, 10
9. I/O: 1 VGA, 2 COM, TPM header
10. 5 USB 3.0 (2 rear, 2 via header(s), 1 Type A), 6 USB 2.0 (2 rear, 4 via header(s))

# Specifications

## Expansion Slots

<b>PCI-E</b>	<ul style="list-style-type: none"> <li>1 PCI-E 3.0 x8,</li> <li>1 PCI-E 3.0 x2 (in x4 slot)</li> </ul>
<b>M.2</b>	<ul style="list-style-type: none"> <li>M.2 Interface: SATA; PCI-E 3.0 x4</li> <li>Form Factor: 2260</li> <li>Key: M-Key</li> </ul>

## System BIOS

<b>BIOS Type</b>	<ul style="list-style-type: none"> <li>128MB SPI Flash EEPROM with AMI BIOS</li> </ul>
<b>BIOS Features</b>	<ul style="list-style-type: none"> <li>Plug and Play (PnP)</li> <li>APM 1.2</li> <li>DMI 2.3</li> <li>PCI 2.3</li> <li>ACPI 1.0 / 2.0 / 3.0 / 4.0</li> <li>USB Keyboard support</li> <li>Hardware BIOS Virus protection</li> <li>SMBIOS 2.7.1</li> <li>UEFI 2.3.1</li> </ul>

## Management

<b>Software</b>	<ul style="list-style-type: none"> <li>SuperDoctor® 5, NMI, <a href="#">SUM</a>, <a href="#">SPM</a>, Intel® Node Manager, <a href="#">SSM</a>, <a href="#">IPMI2.0</a>, Watchdog</li> </ul>
<b>Power Configurations</b>	<ul style="list-style-type: none"> <li>Power-on mode for AC power recovery, ACPI Power Management</li> </ul>

## PC Health Monitoring

<b>Voltage</b>	<ul style="list-style-type: none"> <li>VBAT, System level control, Supports system management utility, Monitors CPU voltages, Chassis intrusion header, +5V standby, +5V, +3.3V, +12V</li> </ul>
<b>LED</b>	<ul style="list-style-type: none"> <li>UID/Remote UID</li> <li>CPU / System Overheat LED</li> </ul>
<b>Temperature</b>	<ul style="list-style-type: none"> <li>Monitoring for CPU and chassis environment</li> <li>CPU thermal trip support</li> <li>Thermal Monitor 2 (TM2) support</li> <li>PECI</li> </ul>
<b>FAN</b>	<ul style="list-style-type: none"> <li>6x 4-pin fan headers (up to 6 fans)</li> <li>Thermal control tachometer fan connectors</li> <li>Fan speed control</li> <li>Overheat LED indication</li> </ul>
<b>Other Features</b>	<ul style="list-style-type: none"> <li>WOL</li> <li>Node Manager Support</li> <li>CPU thermal trip support for processor protection</li> <li>Control of power-on for recovery from AC power loss</li> </ul>

## Operating Environment

<b>Product SKUs</b>		<b>Operating Temperature Range</b>	■ 0°C - 50°C (32°F - 122°F)
<b>MBD-X11SSH-CTF</b>	■ X11SSH-CTF	<b>Non-Operating Temperature Range</b>	■ -40°C - 70°C (-40°F - 158°F)
<b>Physical Stats</b>		<b>Operating Relative Humidity Range</b>	■ 8% - 90% (non-condensing)
<b>Form Factor</b>	■ Micro-ATX	<b>Non Operating Relative Humidity Range</b>	■ 5% - 95% (non-condensing)
<b>Dimension</b>	■ 9.6" x 9.6" (24.38cm x 24.38cm)		
<b>Processor</b>			
<b>CPU</b>	<ul style="list-style-type: none"> <li>■ Intel® Celeron®, Intel® Pentium®, Intel® 7th/6th Generation Core i3 series, Intel® Xeon® processor E3-1200 v6/v5</li> <li>■ Single Socket LGA-1151 (Socket H4) supported, CPU TDP supports Up to 80W TDP</li> </ul>		
<b>Note</b>	<ul style="list-style-type: none"> <li>■ BIOS version 2.0 or above is required to support 7th Generation Intel® Core™ i3 Processors and Intel® Xeon® Processor E3-1200 v6 series</li> </ul>		
<b>System Memory</b>			
<b>Memory Capacity</b>	<ul style="list-style-type: none"> <li>■ 4 DIMM slots</li> <li>■ 64GB ECC UDIMM, DDR4-2400MHz</li> </ul>		
<b>Memory Type</b>	■ 2400/2133/1866/1600MHz SDRAM 72-bit, 288-pin gold-plated DIMMs		
<b>DIMM Sizes</b>	■ 4GB, 8GB, 16GB		
<b>Memory Voltage</b>	■ 1.2V		
<b>Error Detection</b>	■ Corrects single-bit errors		
<b>On-Board Devices</b>			
<b>Chipset</b>	■ Intel® C236		
<b>SATA</b>	■ Intel® C236 controller for 8 SATA3 (6 Gbps) ports; RAID 0,1,5,10		
<b>SAS</b>	■ LSI3008 controller for 8 SAS3 (12 Gbps) ports; RAID 0,1,10		
<b>IPMI</b>	■ ASPEED AST2400 BMC		
<b>Graphics</b>	■ ASPEED AST2400 BMC		
<b>Network Controllers</b>	■ Dual LAN with Intel® X550 10GBase-T Ethernet Controller		
<b>Input / Output</b>			
<b>USB</b>	<ul style="list-style-type: none"> <li>■ 3 USB 3 port(s) (1 Type A; 2 via header)</li> <li>■ 6 USB 2.0 port(s) (4 via header; 2 rear)</li> <li>■ 2 USB 3.0 port(s) (2 rear)</li> </ul>		
<b>Video Output</b>	■ 1 VGA port(s)		
<b>Serial Port</b>	■ 2 COM Port(s) (1 header; 1 rear)		
<b>TPM</b>	■ 1 TPM Header		



## Parts List

Parts List (Bulk Package)			
Name	Part Number	Qty	Description
Motherboard	MBD-X11SSH-CTF	1	X11SSH-CTF Motherboard
I/O Cables	CBL-0044L • <a href="#">eStore</a>	2	57.5CM SATA FLAT S-S PBF
I/O Shield	MCP-260-00042-0N • <a href="#">eStore</a>	1	STD I/O Shield for X11SSH-CTF with EMI Gasket

Parts List (Retail Package)			
Name	Part Number	Qty	Description
Motherboard	MBD-X11SSH-CTF	1	X11SSH-CTF Motherboard
I/O Cables	CBL-0044L • <a href="#">eStore</a>	6	57.5CM SATA FLAT S-S PBF
I/O Shield	MCP-260-00042-0N • <a href="#">eStore</a>	1	STD I/O Shield for X11SSH-CTF with EMI Gasket
QRG	MNL-1783-QRG	1	Motherboard Quick Reference Guide

### Chassis (Optimized for X11SSH-CTF)

Embedded Compact	1U	2U	3U	Mid/Mini-Tower	4U/Tower
	<u>SC813MTQ-350CB</u> ● <u>SC113MFAC2-R606CB</u> ● <u>SC813MFTQ-R400CB</u> ● <u>SC813MFTQC-350CB</u> ● <u>SC813MFTQC-505CB</u> <u>SC512F-350B</u> ● <u>SC113MFAC2-341CB</u> Heatsink:SNK-P0046P	● <u>SC213LT-600LPB</u> ● <u>SC823TQ-653LPB</u> <u>SC825TQ-R720LPB</u> Heatsink:SNK-P0046A4	● <u>SC833T-653B</u> Heatsink:SNK-P0046A4	<u>SC731i-300B</u> <u>SC731i-403B</u> <u>SC732D3-1200B</u> SC732I-500B <u>SC731D-300B</u> <u>SC733TQ-668B</u> Heatsink:SNK-P0046A4	<u>SC842i-500B</u> <u>SC743AC-1200B-SQ</u> <u>SC745BAC-R1K28B2</u> Heatsink:SNK-P0046A4

● = Most optimized Chassis for SuperServer Configuration  
 Blue color = Compatible  
 Green color = Global SKU & Compatible  
 Red dot & green color = Optimized + Global SKU

### Server (Optimized for X11SSH-CTF)

Server Name
<u>SYS-1019S-MC0T</u>

