


SuperServer E403-9D-14C-FN13TP



Views: | [Angled View](#) | [Top View](#) | [Front View](#) | [Rear View](#) |

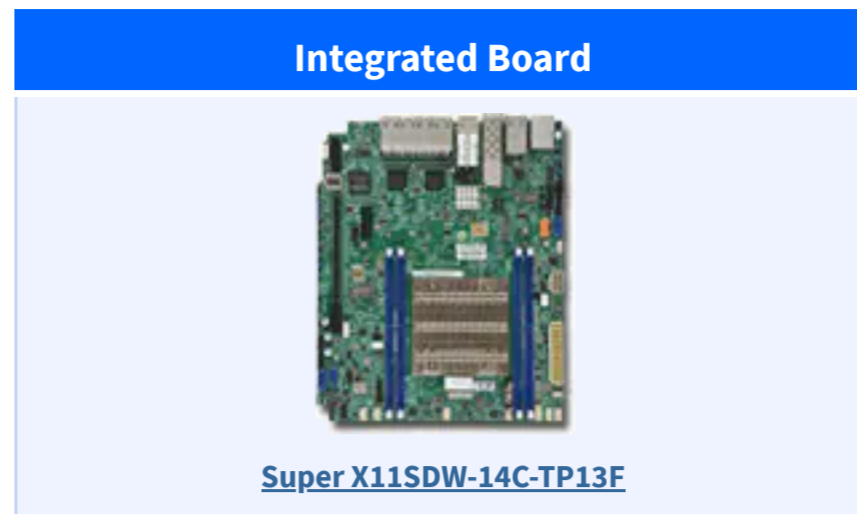

Key Features

Multi-Access Edge Computing (MEC)
Universal Customer Premise Equipment (uCPE)
Network Function Virtualization (NFV)
Edge Computing, Vehicle to Everything Application (C-V2X / V2X)

1. Intel® Xeon® D-2173IT Processor, 14 Cores, 28 Threads, 1.7 GHz, 70W
2. Up to 512GB ECC LRDIMM, up to 256GB reg. ECC RDIMM DDR4-2133Mz; in 4 DIMM slots
3. 2 PCI-E 3.0 x16 or 2 PCI-E 3.0 x8 + 1 PCI-E 3.0 x16 (FHFL) slots
4. 4 Internal 2.5" drive bays
5. M.2: 1 M-Key 2280/22110, 1 E-Key 2230, 1 B-Key, 3042
6. 9 GbE (one for Ethernet management), 2x 10GbE, 2x 10G SFP+, and 1 Dedicated IPMI LAN port
7. 2 USB 3.0, 2 USB 2.0, 1 COM via RJ45, VGA via BMC
8. 600W Multi-output Gold Level Power Supply

[Drivers & Utilities](#) | [BIOS](#) | [IPMI](#) | [Tested Memory](#) | [Tested M.2 List](#) | [Drive Options](#) | [Manuals](#) | [Quick-References Guide](#)

Note: Image above may show a varied configuration of optional parts. Please refer to parts list for standard parts included.

Specifications ^

Product SKUs	
SYS-E403-9D-14C-FN13TP	SuperServer E403-9D-14C-FN13TP (Black)
Motherboard	
Super X11SDW-14C-TP13F	
Processor	
CPU	Intel® Xeon® processor D-2173IT, CPU TDP support 70W
Cores / Cache	14 Cores, 28 Threads
System Memory	
Memory Capacity	Up to 512GB DDR4 ECC LRDIMM Up to 256GB DDR4 ECC RDIMM 4 DIMM slots
Memory Type	2666/2400/2133MHz ECC DDR4 L/RDIMM Operating speed up to 2133MHz
DIMM Sizes	128GB, 64GB, 32GB, 16GB
Memory Voltage	1.2 V
On-Board Devices	
Chipset	System on Chip (SoC)
SATA	SATA3 (6Gbps) ports via SoC controller
Network Controllers	Dual 10G SFP+ via SoC Dual 10GBase-T via Intel X557 8x 1GbE with Intel I350-AM4 Single 1GbE with Intel I210
IPMI	Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Video	VGA via Aspeed AST2500 BMC
Input / Output	
SATA	4 SATA3 (6Gbps) ports; RAID 0, 1, 5, 10
LAN	9 RJ45 Gigabit Ethernet LAN ports 2 RJ45 10GbE LAN ports 2 10G SFP+ LAN ports 1 RJ45 Dedicated IPMI LAN port
USB	2 USB 3.0 ports (front) 2 USB 2.0 ports (front)
Video	1 VGA port
Serial Port / Header	1 COM via RJ45
System BIOS	
BIOS Type	128Mb SPI Flash with AMI BIOS
Management	
Software	Intel® Node Manager IPMI 2.0 NMI SUM Watch Dog SuperDoctor® 5

Chassis	
Form Factor	Box PC
Model	CSE-E403IF-505
Dimensions and Weight	
Height	4.3" (109mm)
Width	10.5" (267mm)
Depth	16" (406mm)
Weight	Gross Weight: 23 lbs (10.43 kg) Net Weight: 17 lbs (7.7 kg)
Available Colors	Black
Front Panel	
Buttons	Power On/Off button System Reset button
LEDs	Power LED Hard drive activity LED Network activity LEDs System Information LED
Expansion Slots	
PCI-Express	2 PCI-E 3.0 x16 (FHFL) slots or 2 PCI-E 3.0 x8, 1 PCI-E 3.0 x16 (FHFL) slots
M.2	1 M.2 M-Key , 2280/22110 1 M.2 E-Key , 2230 1 M.2 B-Key , 3042
Drive Bays	
Internal	4 Internal 2.5" drive bays
System Cooling	
Fans	3x 80x80mm PWM redundant fans
Power Supply	
600W AC multi output power supply w/ PFC	
AC Voltage	100-240 V, 50-60 Hz, 7.5-3.1 Amp
+5V	20 Amp
+5V standby	3 Amp
+12V	49 Amp
+3.3V	16 Amp
Certification	Gold Certified [Test Report]
Operating Environment / Compliance	
RoHS	RoHS Compliant
Environmental Spec.	Operating Temperature: 0°C ~ 50°C (32°F ~ 122°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)

Parts List ^

Parts List - (Items Included)			
	Part Number	Qty	Description
Motherboard / Chassis	MBD-X11SDW-14C-TP13F	1	Super X11SDW-14C-TP13F Motherboard
	CSE-E403IF-505	1	Embedded Server Box
Add-on Card / Module	AOM-SDW-B16X2-P	1	AOM-SDW-B16X2, Dual PCIe x16 slot WIO Riser Card for Intel FlexRAN project,RoHS
Cable 1	CBL-0082L	1	Y split , big 4 pin to two RA SATA power extension 15cm, 18AWG
Cable 2	CBL-0483L	2	SATA,INT,ROUND,ST-ST,29CM,30AWG
Cable 3	CBL-CDAT-0850	1	CBL,VGA,DB15/F,w/Bracket TO 2X8F/P2.54,50CM,28/30AWG,RoHS
Parts	MCP-260-00144-0B	1	1U I/O Shield for X11SDW with EMI Gasket, Black
Air Shroud	MCP-310-50502-0B	1	Air shroud for SC505 + X10SDV-7TP8F
Power Supply	PWS-601-1H	1	1U 600/680W MULTI OUTPUT PWS 80+ GOLD

Notes:

1. Parts with * are inside the chassis
2. Excessive parts might not be shipped, including but not limited to excessive drive trays, fans, riser brackets, air shrouds, IO shields, cables.....etc.

About Us

Company Profile
 Green Computing
 Investor Relations
 Careers
 Site Map

News

Press Releases
 Supermicro in the News
 Product Reviews
 Events
 Webinars

Resources

Product Briefs
 Solution Briefs
 Success Stories
 Videos
 White Papers
 MySupermicro

Connect & Follow

Locations
 Newsletter Sign-up

