


ME03-PE0

AMD EPYC 8004 UP Server Board

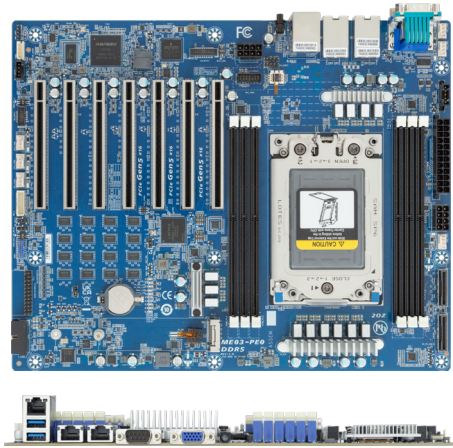

Features

- AMD EPYC™ 8004 Series processors
- Single processor, 5nm technology
- 6-Channel RDIMM DDR5, 6 x DIMMs
- 2 x 1Gb/s BASE-T LAN ports
- 1 x Dedicated management port
- 2 x MCIO 8i for 4 x Gen5 NVMe or 16 x SATA
- 1 x M.2 slot with PCIe Gen3 x4 interface
- 3 x PCIe Gen5 x16 expansion slots
- 4 x PCIe Gen4 x16 and x8 expansion slots
- Aspeed® AST2600 remote management controller

Specification

Form Factor	ATX (W304.8 x D254 mm)	Rear I/O	2 x USB 3.2 Gen1, 1 x VGA, 1 x COM, 2 x RJ45, 1 x MLAN
CPU	AMD EPYC™ 8004 Series processors Single processor, 5nm technology Up to 64-core, 128 threads per processor cTDP up to 225W	Internal I/O	2 x MCIO 8i connectors, 1 x M.2 slot, 1 x CPU fan header, 5 x System fan headers, 1 x USB 3.2 Gen1 header, 1 x TPM header, 1 x Front panel header, 1 x Back plane board header, 1 x PMBus connector, 1 x IPMB connector, 1 x Clear CMOS jumper, 1 x BIOS recovery jumper, 1 x Buzzer
Socket	1 x LGA 4844, Socket SP6	OS Compatibility	Windows Server 2019 / 2022 RHEL 8.6 / 8.7 / 8.8 / 9.0 / 9.1 / 9.2 (x64) SLES 15 SP4 / 15 SP5 (x64) Ubuntu 20.04.5 / 20.04.6 / 22.04 / 22.04.1 / 22.04.2 LTS (x64) VMware ESXi 7.0 Update 3i / 8.0 Citrix Hypervisor 8.2 LTSR CU1
Chipset	System on Chip	Board Management	Aspeed® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
Memory	6-Channel DDR5 memory, 6 x DIMM slots RDIMM modules up to 96GB supported Memory speed: Up to 4800 MHz	PSU Connectors	1 x 24-pin ATX main power connector 2 x 8-pin ATX 12V power connectors
LAN	2 x 1Gb/s BASE-T LAN ports (1 x Broadcom® BCM5720) NCSI function supported 1 x 10/100/1000 management LAN	Operating Properties	Operating temperature: 10°C to 40°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
Video	Integrated in Aspeed AST2600 2D Video Graphic Adapter with PCIe bus interface 1920x1200@60Hz 32bpp, DDR4 SDRAM	Retail Packaging Content	1 x ME03-PE0, 1 x I/O shield, 1 x Quick start guide, 1 x MCIO 8i to 8 x SATA 6Gb/s cable Single Box dimensions: 360 x 330 x 80 mm
Storage	2 x MCIO 8i for 16 x SATA 1 x M.2 slot: M-key, PCIe Gen3 x4, supports 2280/22110 cards	Bulk Packaging Content	10 x ME03-PE0, 10 x I/O shields Carton dimensions: 674 x 424 x 385 mm
Expansion Slots	Slot_7: 1 x PCIe x16 (Gen5 x16) slot Slot_6: 1 x PCIe x16 (Gen5 x16) slot Slot_5: 1 x PCIe x16 (Gen5 x16) slot Slot_4: 1 x PCIe x16 (Gen4 x8) slot Slot_3: 1 x PCIe x16 (Gen4 x16 or x8) slot, shared with Slot_4 Slot_2: 1 x PCIe x16 (Gen4 x8) slot Slot_1: 1 x PCIe x16 (Gen4 x16 or x8) slot, shared with Slot_2	Reference Numbers	Retail: 9ME03PE0MR-000-10* Bulk: 9ME03PE0NR-000-10*
TPM	1 x TPM header with SPI interface (Optional TPM2.0 kit: CTM010)		



Learn more about GIGABYTE server, visit <https://www.gigacomputing.com>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* AMD, the AMD Arrow logo, EPYC and combinations thereof are trademarks of Advanced Micro Devices, Inc.
* All other brands, logos and names are property of their respective owners.

© 2023 Giga Computing Technology Co., Ltd. All rights reserved.

Engineered by

