


X13SCW-F

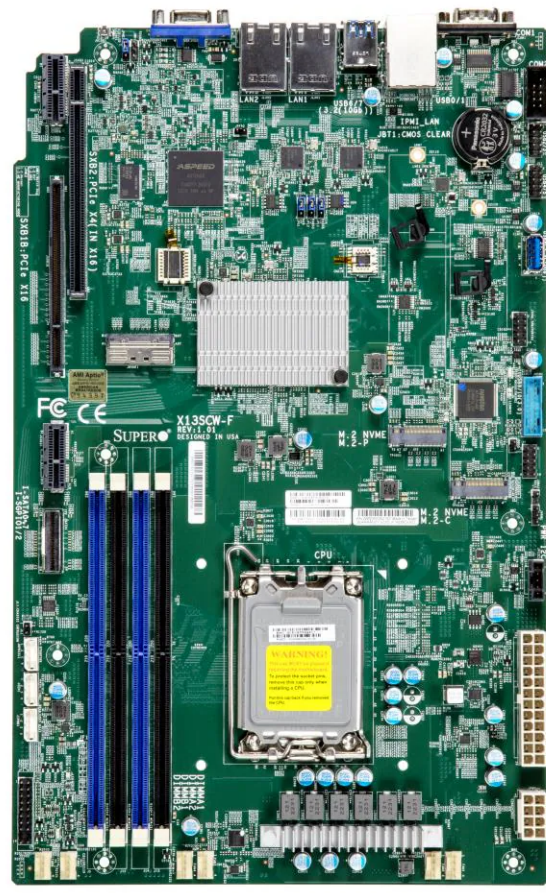

Key Features

1. Intel® Xeon® E-2400 Series Processor, Pentium®** Processor, Single Socket LGA-1700 (Socket V0) supported, CPU TDP supports Up to 95W TDP
2. Intel® C266 controller for 8 SATA3 (6 Gbps) ports; RAID 0,1,5,10
3. Up to 128GB ECC Unbuffered DIMM, DDR5-4400MHz, in 4 DIMM slots
4. 1 PCIe 5.0 x16 (Left Riser Slot)
1 PCIe 4.0 x4 (in x16, Right Riser slot)
5. **M.2 Interface:** 2 PCIe 4.0 x4
M.2 Form Factor: 2280, 22110
M.2 Key: M-Key
6. Dual LAN with Intel® i210 Gigabit Ethernet Controller
7. 3 USB 3.2 Gen2 ports (2 rear + 1 Type A)
2 USB 3.2 Gen1 ports (via header)
4 USB 2.0 ports (2 rear + 2 via header)

...

Contact Us

Optimized Servers

[SYS-511R-W](#)

Specifications

Resources

Parts List

Product SKUs	
MBD-X13SCW-F	
Physical Stats	
Form Factor	Proprietary WIO
Dimension	8" x 13" (20.32cm x 33.02cm)
Processor	
CPU	Intel® Xeon® E-2400/Pentium®** Processor Single Socket V0 (LGA-1700) supported, CPU TDP supports Up to 95W TDP *Pentium® G7400 and G7400T
Core	Up to 8 cores
System Memory	
Memory Capacity	4 DIMM slots Up to 128GB Unbuffered ECC UDIMM, DDR5-4400MT/s
Memory Type	4400/4000/3600 MT/s Up to 128GB of memory with speeds of up to 4400MT/s (1DPC)
DIMM Sizes	8GB, 16GB, 32GB
Memory Voltage	1.1V
Error Detection	Corrects single-bit errors Detects double-bit errors (using ECC memory)
On-Board Devices	
Chipset	Intel® C266
SATA	Intel® C266 controller for 8 SATA3 (6 Gbps) ports; RAID 0,1,5,10
IPMI	ASPEED AST2600 BMC
Graphics	1 Aspeed AST2600 BMC port(s)
Network Controllers	Dual LAN with 1GbE with Intel® I210
Input / Output	
SATA	8 SATA3 (6Gbps) port(s) via Slimline SAS x8 connector
LAN	2 RJ45 Gigabit Ethernet LAN ports 1 RJ45 Dedicated IPMI LAN port
USB	4 USB 2.0 port(s) (2 via header; 2 rear) 2 USB 3.2 Gen1 port(s) (2 via header) 3 USB 3.2 Gen2 port(s) (2 rear; 1 type A)
Video Output	1 VGA D-Sub Connector port(s)
Serial Port	2 COM Port(s) (1 header; 1 rear)
TPM	1 TPM Header

Expansion Slots	
PCIe	1 PCIe 5.0 x16 Left Riser Slot, 1 PCIe 4.0 x4 Right Riser (in x16) slot
M.2	M.2 Interface: 2 PCIe 4.0 x4 Form Factor: 2280/22110 Key: M-Key
System BIOS	
BIOS Type	AMI 32MB AMI UEFI
BIOS Features	ACPI 6.4 SMBIOS 3.5 UEFI 2.8 Plug and Play (PnP) PCI FW 3.3
Management	
Software	SuperCloud Composer , Supermicro Server Manager (SSM) , Supermicro Power Manager (SPM) , Supermicro Update Manager (SUM) , Supermicro SuperDoctor® 5 (SD5) , Super Diagnostics Offline (SDO) , Supermicro Thin-Agent Service (TAS) , SuperServer Automation Assistant (SAA) New! , Plug-ins for 3rd Party Software , IPMI Utilities
Power Configurations	ACPI Power Management, Power-on mode control for AC power loss recovery, Power button override mechanism, Wake-On-LAN
PC Health Monitoring	
Voltage	VBAT, System level control, Supports system management utility, Monitors CPU voltages, Chipset Voltage, Chassis intrusion header, 6 -fan status, +5V standby, +5V, +3.3V, +12V, Memory Voltages, +3.3V standby
LED	UID/Remote UID CPU / System Overheat LED
Temperature	Monitoring for CPU and chassis environment CPU thermal trip support PECI
FAN	6x 4-pin fan headers (up to 6 fans) Fan speed control 6 fans with tachometer status monitoring Overheat LED indication
Other Features	WOL, UID, M.2 NGFF connector, Control of power-on for recovery from AC power loss, Chassis intrusion detection, ACPI power management
Operating Environment	
Operating Temperature Range	0°C - 50°C (32°F - 122°F)
Non-Operating Temperature Range	-40°C - 70°C (-40°F - 158°F)
Operating Relative Humidity Range	8% - 90% (non-condensing)
Non Operating Relative Humidity Range	5% - 95% (non-condensing)

Certain products may not be available in your region

About Us

Company Profile
Green Computing
Investor Relations
Careers
Site Map
Glossary

News

Press Releases
Supermicro in the News
Product Reviews
Events
Webinars

Resources

Product Briefs
Solution Briefs
Success Stories
Videos
White Papers
Thought Leadership
MySupermicro
Data Center Stories

Connect & Follow

Locations
Contact Us
Newsletter Sign-up

