

EG500-E11-RS4-F

Intel Single-Socket, 1U Edge Server



ASUS EG500-E11 was designed for Short-depth chassis and front access design for space-limited edge environment. Compact edge and 5G server, front I/O access, wide temperature, 3 FHHL cards, 4 SATA with short PSU, and 2 M.2 Redundant DC PSU and support for critical environment temperature. Design for NEBS and supports Time-sync NIC and FEC FPGA for teleco applications

FEATURE

- 8 x DDR5 5600 Mhz DIMM support
- 2 x M.2 socket support
- Powered by single-socket 5th Gen Intel Scalable processors.
- 3 x PCIe expansion in 1U rack sever.
- Support GPUs in short-depth chassis
- CPU maximum TDP of up to 205W or 225W EE SKUs with 8 DIMMs and support.
- Front access for easy maintenance
- 2 x Intel X710 10GbE Base-T ports+1 x Management port
- Design for NEBS

Target market

- 5G Core and Edge
- Multi-Access Edge Computing
- Open-RAN DU/CU
- Virtual Machines
- Network Function Virtualization
- Industrial usage
- Edge AI Inferencing

1. 2 x E1.S modules*
2. VGA port
3. Management LAN port
4. Dual 10G LAN port
5. RJ45 Console port

Powered by 5th Gen Intel Xeon SP processors and supports Intel vRAN Boost technology*

The 5th Gen Intel® Xeon® Scalable Processors are designed to accelerate performance across the fastest-growing workloads that businesses depend on today. Built-in accelerators improve performance across AI, analytics, networking, storage, and HPC. ASUS EG500-E11 series supports single Intel Scalable processors to enable up to 8 DIMM slots, all flash and PCIe Gen 5.0

*Xeon SP with Intel vRAN Boost support based upon Intel official schedule

Short-depth chassis and front access design for space-limited, edge environments Supports Time-sync NIC and FEC FPGA for telecommunications applications

NVIDIA GPU Support

Up to 1 dual-slot GPU in 1U system and optimized acceleration for workloads across cloud, data center and for hybrid cloud environment

PCIe 5.0 Ready


PCI Express® (PCIe®) 5.0 delivers 32GT/s bandwidth, which is twice the speed of PCIe 4.0, and offers lower power consumption, better land scalability and backwards compatibility.

Enhanced Security

PFR FPGA as the platform Root-of-Trust solution for firmware resiliency. Trusted Platform Module 2.0 (TPM 2.0) to secure hardware through integrated cryptographic keys and offer regular firmware update for vulnerabilities.

Comprehensive IT infrastructure management solution

ASUS EG500-E11 series features an embedded ASMB11-iKVM (BMC, AST2600) and is bundled with ASUS Control Center to provide comprehensive out-of-band and in-band management capability.

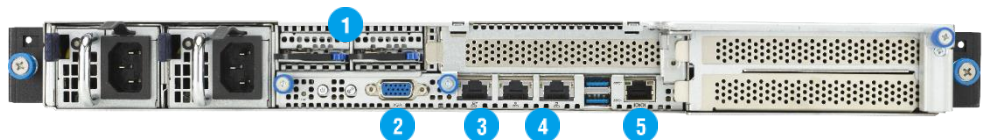

*Optional, cannot be purchased separately

Please select it when purchasing order and we will have assembling and standard testing before ship

EG500-E11-RS4-F

SPECIFICATION


Processor		1 x Socket E (LGA 4677) 5th Gen Intel® Xeon® Processor Scalable Family (Up to 205W or 225W EE SKUs)
Memory	Total Slots	8 (8-channel, 1 DIMM per channel)
	Capacity	Up to 2TB
	Memory Type	DDR5 5600 RDIMM/LRDIMM/LRDIMM 3DS
	Memory Size	256GB, 128GB, 64GB, 32GB, 16GB *Refer to ASUS server AVL for the latest update
Expansion Slots	Total Slots	3
	Slot Type	3 x PCIe G5 x16 link (FHHL)
Storage Bays		2 x E1.S (optional) + 2x Int. SATA (optional) + 2x ext. SATA(Rear) for 650W/Short PSU 2 x E1.S (optional) + 2x ext. SATA(Rear)for 1300W/Long PSU 2 x M.2 (22110/2280, Gen5 x4 Link) *E1.S is optional for E1.S SKU
Networking	LAN	2 x X710 10G LAN Ports 1 x Dedicated management port (BMC, AST2600)
Security		Optional TPM-SPI module Optional PFR module(by request)
Front I/O Ports		1 x VGA port 2 x USB 3.2 Gen1 ports 2 x RJ-45 10G LAN port 1 x RJ-45 Mgmt. LAN port 1 x RJ-45 Console port
Rear I/O Ports		2 x USB 3.2 Gen1 ports 1 x VGA port
Switch/LED		Front Switch/LED: 1 x Power Switch (w/ LED) 1 x Location Switch (w/ LED) 1 x Message LED 2 x LAN LED 1 x HDD LED 1 x reset button Rear Switch/LED: 1 x Power Switch w/ LED 1 x Location Switch w/ LED 1 x Message LED 1 x reset button
OS Support		*Please find the latest OS support from https://www.asus.com/event/Server/OS_support_list/OS.html
Management Solution	Software	ASUS Control Center (in-band)
	Out of Band Remote Management	ASMB11-iKVM (BMC, AST2600)
Dimension		399*mm x 438.5mm x 43.7mm(1U 5G SKU) *ear to rear wall
Net Weight Kg		15.5kg (approximate) (CPU, DRAM & HDD not included)
Gross Weight Kg		17kg (approximate) (CPU, DRAM & HDD not included, Packing include)
Power Supply (following different configuration by region)		1+1 Redundant AC/DC 650W 50.5MM SLIM Platinum Power Supply 1300W 50.5MM SLIM Platinum Power Supply *Titanium Power Supply is planning
Environment		Operation temperature: 0°C ~ 55°C Non operation temperature: -40°C ~ 70°C Non operation humidity: 20% ~ 90% (Non condensing) Note: Operating Temperature based on configurations




Top view



EG500-E11-RS4-F

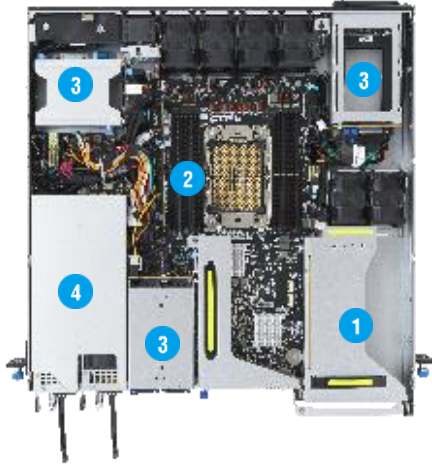

EG500-E11-RS4-F

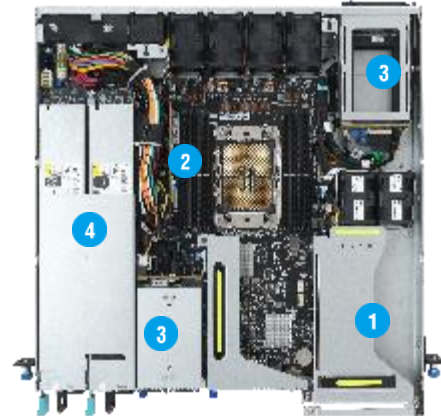


Front I/O, External 2.5" Bays

- 1 3x FHHL cards (x16/x16x16)
- 2 2x M.2
- 3 2x E1.S* + 2x Internal SATA* + 2x external SATA(Rear)
- 4 Redundant AC/DC PSU (650W PSU)


Front I/O, External 2.5" Bays

- 1 3x FHHL cards (x16/x16/x16)
- 2 2x M.2
- 3 2x E1.S module* + 2x external SATA(Rear)
- 4 Redundant AC/DC PSU (1300W PSU)

EG500-E11-RS2-F

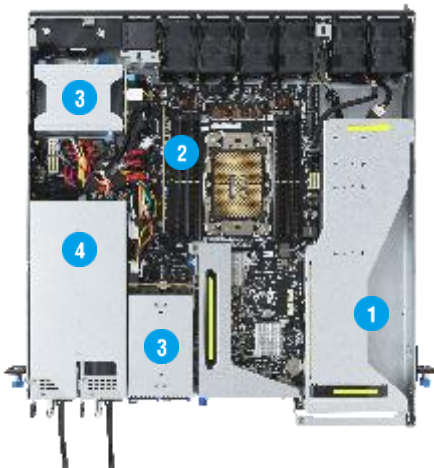

EG500-E11-RS2-F

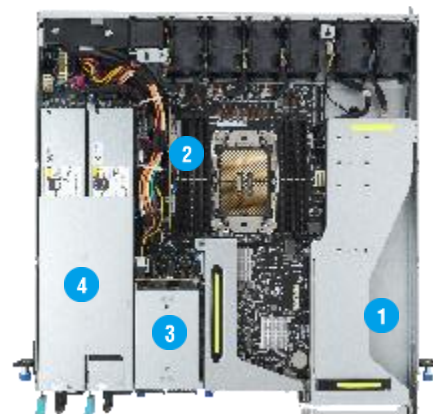

Front I/O, FHFL Card

- 1 1x FHHL cards (x16)+ 2x FHFL cards (x16/x16)
- 2 2x M.2
- 3 2x E1.S module* + 2x Internal SATA*
- 4 Redundant AC/DC PSU (650W PSU)

Front I/O, FHFL Card

- 1 1x FHHL card (x16)+ 2x FHFL cards (x16/x16)
- 2 2x M.2
- 3 2x E1.S module*
- 4 Redundant AC/DC PSU (1300W PSU)

*Optional, cannot be purchased separately
Please select it when purchasing order and we will have assembling and standard testing before ship