




# X13DGU (For SuperServer Only)



Print

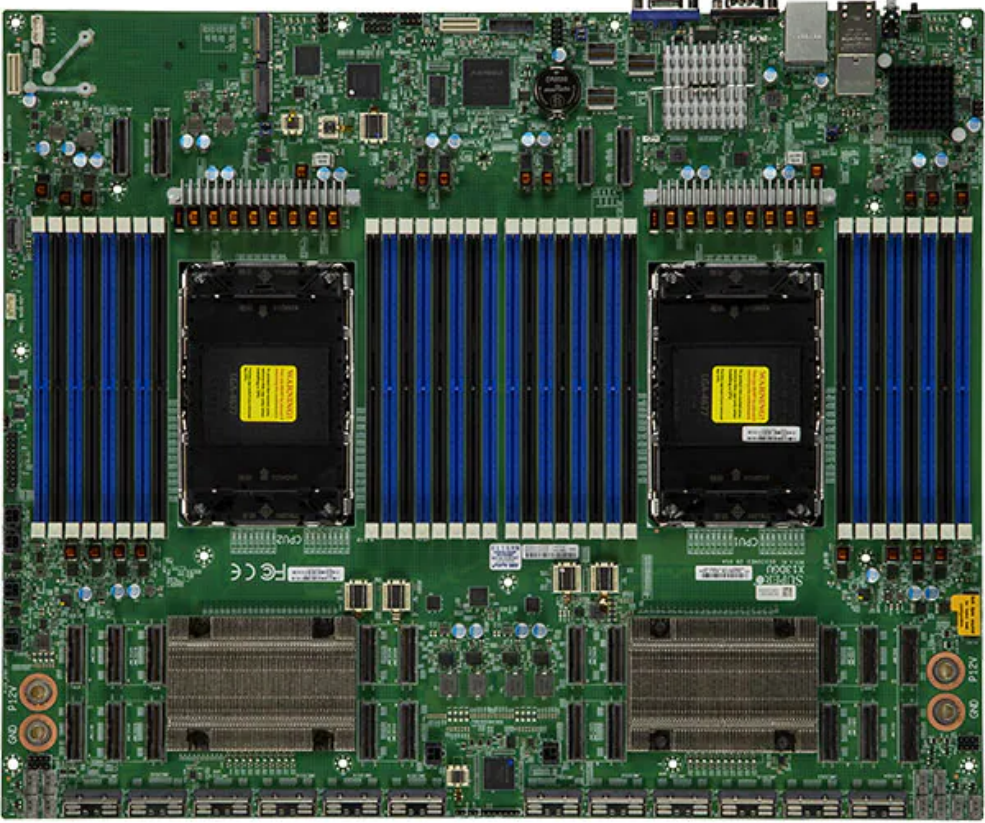

## Key Features

1. Support HBM
2. 5th/4th Gen Intel® Xeon® Scalable processors and Intel® Xeon® Max series processors, Dual Sockets LGA-4677 (Socket E) supported, CPU TDP supports Up to 350W TDP
3. Intel C741® Chipset
4. Up to 8TB 3DS ECC RDIMM, DDR5-5600MT/s in 32 DIMM slots
5. 12 PCIe 5.0 MCIO x8
6. Dual LAN with Intel X710 10GbE
7. 1 VGA port
8. 2 hybrid M.2
9. 2 USB 3.0

...

## Optimized Servers

[SYS-421GU-TNXR](#)

Contact Us

## X13 Universal

- Specifications
- Resources
- Parts List

Product SKUs	
MBD-X13DGU	
Physical Stats	
Form Factor	Proprietary
Dimension	14.29" x 17.32" (36.3cm x 43.99cm)
Processor	
CPU	<a href="#">5th Gen Intel® Xeon®</a> / <a href="#">4th Gen Intel® Xeon® Scalable processors</a> and Intel® Xeon® Max Series processors Dual Socket Socket E (LGA-4677) supported, CPU TDP supports Up to 350W TDP SP XCC, SP MCC, and MAX Series (HBM) SKUs are supported
Core	Up to 64 cores
System Memory	
Memory Capacity	32 DIMM slots Up to 8TB 3DS ECC RDIMM, DDR5-5600MT/s
Memory Type	5600/5200/4800/4400/4000 MT/s ECC DDR5 RDIMM (3DS) Up to 256GB of memory with speeds of up to 5600MT/s(1DPC) or 4400 MT/s (2DPC)
DIMM Sizes	16GB, 32GB, 64GB, 96(XCC Only)GB, 128GB, 256GB RDIMM: Up to 256GB
Memory Voltage	1.1V
Error Detection	Corrects single-bit errors Detects double-bit errors (using ECC memory)
On-Board Devices	
Chipset	Intel® C741
SATA	Intel® C741 controller for 10 SATA3 ports
Network Controllers	Dual LAN Dual LAN with 10Gbase-T, Intel® Ethernet Network Adapter X710
Input / Output	
USB	2 USB port(s) (2 rear)
Video Output	1 rear port(s)
Serial Port	1 COM Port(s) (1 header)
TPM	1 TPM Header

Expansion Slots	
PCIe	16 PCIe 5.0 x8 PCIe5.0 MCIO connector
M.2	M.2 Interface: 2 SATA/PCIe 3.0 x4 Form Factor: 2280 Key: M-Key
System BIOS	
BIOS Type	AMI 64MB AMI UEFI
BIOS Features	ACPI 6.4 SMBIOS 2.8/3.5 UEFI 2.8A Plug and Play (PnP) PCI FW 3.2
Management	
Software	<a href="#">SuperCloud Composer</a> , <a href="#">Supermicro Server Manager (SSM)</a> , <a href="#">Supermicro Power Manager (SPM)</a> , <a href="#">Supermicro Update Manager (SUM)</a> , <a href="#">Supermicro SuperDoctor® 5 (SD5)</a> , <a href="#">Super Diagnostics Offline (SDO)</a> , <a href="#">Supermicro Thin-Agent Service (TAS)</a> , <a href="#">SuperServer Automation Assistant (SAA) New!</a> , <a href="#">Plug-ins for 3rd Party Software</a> , <a href="#">IPMI Utilities</a>
PC Health Monitoring	
Voltage	VBAT, System level control, Supports system management utility, Monitors CPU voltages, Chipset Voltage, Chassis intrusion header, 5 -fan status, +5V standby, +5V, +3.3V, +12V, Memory Voltages
LED	UID/Remote UID CPU / System Overheat LED
Temperature	Monitoring for CPU and chassis environment CPU thermal trip support Thermal Monitor 2 (TM2) support PECI
FAN	10x 4-pin fan headers (up to 10 fans) Fan speed control 5 fans with tachometer status monitoring Overheat LED indication
Other Features	UID, Node Manager Support, M.2 NGFF connector, Control of power-on for recovery from AC power loss, Chassis intrusion detection, ACPI power management
Operating Environment	
Operating Temperature Range	10°C - 35°C (50°F - 95°F)
Non-Operating Temperature Range	-40°C - 70°C (-40°F - 158°F)
Operating Relative Humidity Range	8% - 90% (non-condensing)
Non Operating Relative Humidity Range	5% - 95% (non-condensing)

Certain products may not be available in your region

## About Us

Company Profile  
Green Computing  
Investor Relations  
Careers  
Site Map  
Glossary

## News

Press Releases  
Supermicro in the News  
Product Reviews  
Events  
Webinars

## Resources

Product Briefs  
Solution Briefs  
Success Stories  
Videos  
White Papers  
Thought Leadership  
MySupermicro  
Data Center Stories

## Connect & Follow

Locations  
Contact Us  
Newsletter Sign-up

