
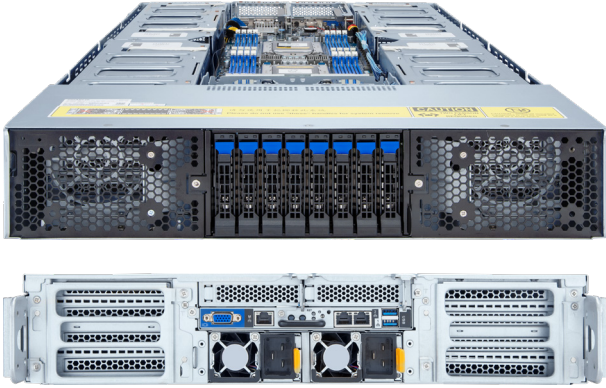


G292-Z45-ICU1

2U DP 8 x Gen4 GPU Immersion Server



Features

- Single-Phase Immersion Ready Server
- Supports up to 8 x double slot GPU cards
- Dual AMD EPYC™ 7003 series processor family
- 8-Channel RDIMM/LRDIMM DDR4, total 16 x DIMMs
- 2 x 1Gb/s LAN ports
- 1 x Dedicated management port
- 8 x 2.5" SATA/SAS hot-swappable HDD/SSD bays
- 8 x PCIe Gen4 x16 expansion slots for GPU
- 2 x PCIe Gen4 low-profile slots for add-on cards
- Dual 2200W (240V) 80 PLUS Titanium power supply

Specification

Dimensions	2U (W448 x H87.5 x D800 mm)	Backplane I/O	8 x SAS/SATA ports Bandwidth: SATA 6Gb/s, SAS 12Gb/s
Motherboard	MZ42-G21	TPM	1 x TPM header with SPI interface Optional TPM2.0 kit: CTM010
CPU	AMD EPYC™ 7003 Series processors Dual processors, 7nm technology, cTDP up to 240W Up to 64-core, 128 threads per processor Compatible with AMD EPYC™ 7002 Series processors	Power Supply	Dual 2200W 80 PLUS Titanium power supply AC Input: 100-240V
Chipset	System on Chip	System Management	Aspeed® AST2500 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
Memory	8-Channel DDR4 memory, 16 x DIMM slots, up to 3200 MHz RDIMM/LRDIMM modules up to 128GB supported 3DS RDIMM/LRDIMM modules up to 256GB supported	OS Compatibility	Windows Server 2016 / 2019 / 2022 RHEL 8.3 / 9 (x64) or later SLES 12 SP5 / 15 SP2 (x64) or later Ubuntu 18.04.5 LTS / 20.04 LTS / 22.04 LTS (x64) or later VMware ESXi 6.7 Update3 P03 / 7.0 Update1 or later Citrix Hypervisor 8.2.0 or later
LAN	2 x 1Gb/s LAN ports (Intel® I350-AM2 controller) 1 x 10/100/1000 management LAN	System Fans	N/A
Video	Integrated in Aspeed® AST2500 2D Video Graphic Adapter with PCIe bus interface 1920x1200@60Hz 32bpp	Operating Properties	Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
Storage	8 x 2.5" hot-swappable HDD/SSD bays - 8 x blue HDD trays compatible with SATA/SAS devices only SAS card is required for SAS devices support Recommended 12Gb/s SAS cards: CRA4448, CRA4548	Packaging Content	1 x G292-Z45 2 x CPU heatsinks
RAID	Depends on optional SAS RAID Card	Reference Numbers	Barebone: 6NG292Z45MR000ICM1* - Motherboard: 9MZ42G21NR-00 - CPU heatsink: 25ST1-44320N-A3R/ 25ST1-44320P-A3R - Back plane board: 9CBPG084NR-00 - Riser card for GPU: 9CRSG226NR-00/ 9CRSG227NR-00 - Power supply: 25EP0-22200B-G1S - C19 type power cord 125V/15A (US): 25CP1-018000-Q0R (optional) - C19 type power cord 250V/16A (EU): 25CP3-01830H-Q0R (optional)
Expansion Slots	8 x PCIe x16 slots (Gen4 x16) for GPU 1 x PCIe x16 (Gen4 x16) low-profile slot 1 x PCIe x16 (Gen4 x8) low-profile slot		
Front I/O	N/A		
Rear I/O	2 x USB 3.2 Gen1, 1 x VGA, 2 x RJ45, 1 x MLAN		



Learn more about GIGABYTE server solutions, visit www.gigabyte.com/Enterprise

* All specifications are subject to change without notice. Please visit our website for the latest information.

* AMD, and the AMD Arrow logo, AMD EPYC and combinations thereof are trademarks of Advanced Micro Devices, Inc.

* All other brands, logos and names are property of their respective owners.

© 2022 GIGABYTE Technology Co., Ltd. All rights reserved.